Full HD IR Bullet IP Camera
User's Manual

Ver1.6

00P3NX052ZXSEA6

Table of Contents

1. Overview 3
1.1 Features 3
1.2 Package Contents 4
2. Introduction of the IP Camera 5
2.1 Camera Dimensions 5
2.2 Camera's Connectors 6
3. Installation 8
3.1 Cable Connection 8
3.2 Ceiling/Wall Mounting 9
3.3 Lens Adjustment (Vari-focal Lens only) 10
4. System Requirements 11
5. Deleting the Existing DC Viewer 12
6. Accessing Camera 15
7. Configuration & Operation 22
7.1 Browser-based Viewer Introduction 22
7.2 Home Page 24
7.2.1 Board/Vari-focal Lens Model 24
7.2.2 Motorized Lens Model 26
7.3 System Related Settings 30
7.3.1 Host Name and System Time Setting 31
7.3.2 Security 33
7.3.2.1 User 34
7.3.2.2 HTTPS 36
7.3.2.3 IP Filter 41
7.3.2.4 IEEE 802.1X 42
7.3.3 Network 44
7.3.3.1 Basic 45
7.3.3.2 QoS (Quality of Service) 48
7.3.3.3 SNMP (Simple Network Management Protocol) 50
7.3.3.4 UPnP 51
7.3.4 DDNS 54
7.3.5 Mail 56
7.3.6 FTP 57
7.3.7 HTTP 58
7.3.8 Application 59
7.3.9 Motion Detection 64
7.3.10 Network Failure Detection 70
7.3.11 Tampering 72

7.3.12 Storage Management 77
7.3.13 Recording 80
7.3.14 File Location 81
7.3.15 Iris Adjustment 82
7.3.16 View Information 83
7.3.16.1 Log File 84
7.3.16.2 User Information 85
7.3.16.3 Parameters 87
7.3.17 Factory Default 88
7.3.18 Software Version 89
7.3.19 Software Upgrade 90
7.3.20 Maintenance 93
7.4 Video and Audio Streaming Settings 95
7.4.1 Video Resolution and Rotate Type 95
7.4.2 Video Compression 98
7.4.3 Video OCX Protocol 100
7.4.4 Video Frame Skip 101
7.4.5 Video Mask 102
7.4.6 Audio Mode and Bit Rate Settings 104
7.5 Camera Settings 106
7.5.1 Exposure Setting 106
7.5.2 White Balance Setting 108
7.5.3 Backlight Setting 109
7.5.4 Brightness Setting 109
7.5.5 Sharpness Setting 109
7.5.6 Contrast Setting 109
7.5.7 Saturation Setting 110
7.5.8 Hue Setting 110
7.5.9 IR Function 110
7.5.10 TV System Setup 111
7.6 Logout 112
8. CMS Software Introduction 113
Appendix A: Technical Specifications 114
Appendix B: Internet Security Settings 116
Appendix C: DC Viewer Download Procedure 119
Appendix D: Install UPnP Components 121

1. Overview

The Full HD IR Bullet IP Camera is capable of serving real-time streaming and makes image quality more smoothly. In addition to MJPEG real time streaming, this camera develops H.264 codec to apply for high resolution digital broadcast.

With sophisticated mechanical design plus cable management, the Full HD IR Bullet IP Camera is easy installed and aesthetic.

1.1 Features

- Progressive Scan CMOS Sensor
- Full HD 1080p / HD 720p real-time at dual streaming
- H.264 and MJPEG compression
- Remote Zoom & Focus (Motorized Lens; Optional)
- Motion Detection
- Privacy Masks
- Day/Night (ICR)
- Micro SD support
- Cable Management
- Weatherproof (IP66 international)
- Sunshield (Optional)
- ONVIF Support

1.2 Package Contents

Please check the package contains the following items listed below.

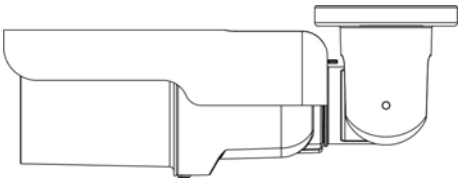 IR Bullet IP Camera (Cable included)	 Power Terminal Block (x1)
 M4 Inner Hex Wrench (x1)	 M4 Self Tapping Screws (x5)
 Plastic Screw Anchors (x5)	 Desiccant
 CD (bundled software and documentation)	 Quick Guide
 Desiccant User Guide	

2. Introduction of the IP Camera

This chapter will provide the camera dimensions and overview of the supplied all-in-one cable for reference before installation.

2.1 Camera Dimensions

The IP Camera's dimensions are shown below.

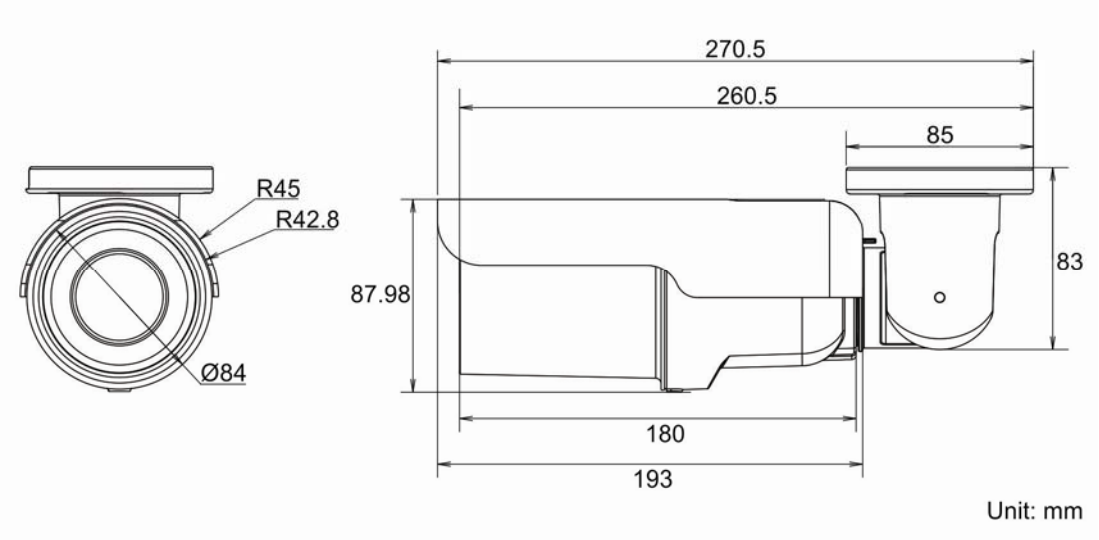

2.2 Camera's Connectors

The IP Camera is equipped with an all-in-one cable for quick wiring. Definition for each connector will be given as follows.

All-in-one Cable

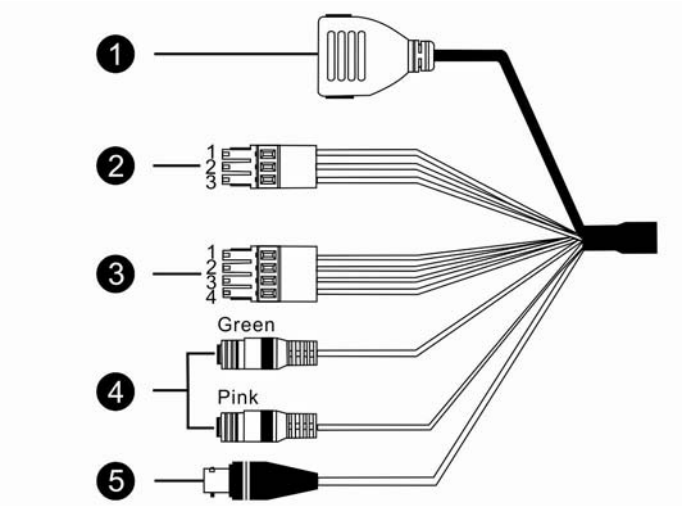

No	Cable	Pin	Definition		Remarks
1	**Network (with PoE)**	-	RJ-45 connector with LED		
2	**Power (3-pin Terminal Block)**	1	AC 24V-1	DC (-)	Power connection
		2	GND	Reserved	
		3	AC 24V-2	DC (+)	
3	**Alarm**	1	ALM_DI－		Alarm connection
		2	ALM_DI＋		
		3	ALM_DO－		
		4	ALM_DO＋		
4	**Audio I/O**	Pink	Line In/ Mic In		Two-way audio transmission
		Green	Line Out		
5	**BNC**	-	Video Out		

Micro SD Card Slot/ Reset Button

Follow the steps below to reach the Micro SD Card Slot, Reboot Button and Factory Default Button on IP Camera:

Step 1:

Unscrew the screw on Camera Housing and remove the Front Cover.

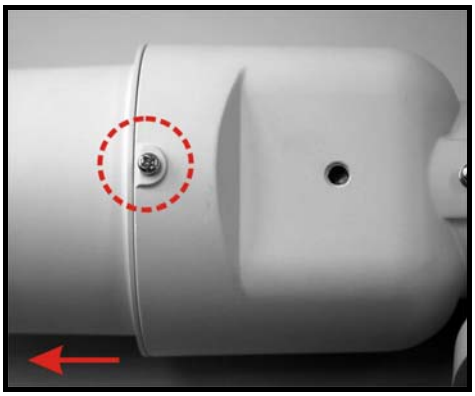



Micro SD Card Slot



Factory Default Button



Reboot Button

NOTE: Before installing, please refer to Desiccant User Guide in the package to place the Desiccant in the Camera to prevent moisture from condensing on IP Camera's Glass Cover.

3. Installation

Please read the instructions provided in this chapter thoroughly before installing the Full HD IR Bullet IP Camera.

3.1 Cable Connection

Power Connection

Make sure the camera's power cable is correctly and firmly connected; refer to the pin definition table in section 2.2 Camera's Connectors. If using Power over Ethernet (PoE), make sure Power Sourcing Equipment (PSE) is in use in the network.

Ethernet Cable Connection

Use of Category 5 Ethernet cable is recommended for network connection; to have best transmission quality, cable length shall not exceed 100 meters. Connect one end of the Ethernet cable to the RJ-45 connector of the IP Camera, and the other end of the cable to the network switch or PC.

NOTE: In some cases, you may need use an Ethernet crossover cable when connecting the IP Camera directly to the PC.

Check the status of the link indicator and activity indicator LEDs; if the LEDs are unlit, please check LAN connection.



Green Link Light indicates good network connection.
Orange Activity Light flashes for network activity indication.

3.2 Ceiling/Wall Mounting

The IR Bullet IP Camera can be installed directly on a wall or ceiling with the integrated 2-axis adjustable Bracket Mount. Please note that the wall or ceiling must have enough strength to support the IP Camera.

Follow the steps below to install the IP Camera:

Step 1:

Unpack the IR Bullet IP Camera package and take out the IP Camera.

Step 2:

Connect the power/Ethernet/alarm/audio wires from ceiling or wall to the corresponding connectors of the camera's All-in-one Cable.

Step 3:

Fix the IP Camera's Bracket on the ceiling/wall with three supplied self tapping screws

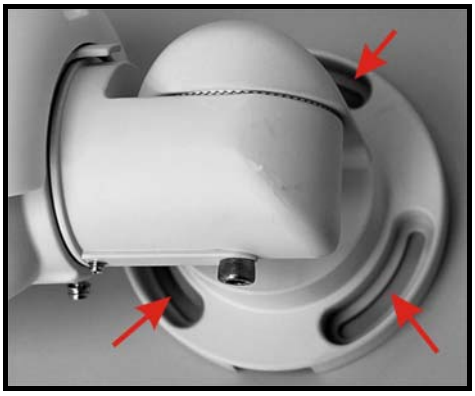

Step 4:

Use the supplied Inner Hex Wrench and cross screwdriver to loosen the hex bolt/screw on the side of the Bracket Mount and the Camera Housing to adjust the position of the IP Camera.

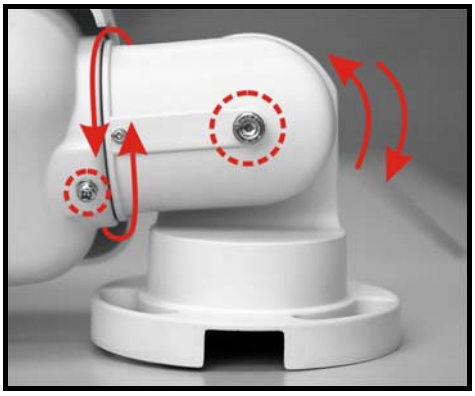

3.3 Lens Adjustment (Vari-focal Lens only)

Step 1:
Unscrew the screw on the Camera Housing and remove the Front Housing.

Step 2:
Connect the power/Audio/alarm I/O wires to the mating connectors. Please refer to 3.1 Cable Connection for more cabling installing details.

Step 3:
Access the Camera Browser-viewer for viewing images. Please refer to 6. Accessing Camera for further details.

Step 4:
Adjust the Zoom/ Focus Ring Screw on the lens to set the desired zoom/ focal length.

Step 5:
Put the Front Housing back, and make sure it's well attached to the Camera Housing, and tighten the screw.

4. System Requirements

To perform the IP Camera via web browser, please ensure your PC is in good network connection, and meet system requirements as described below.

Items	System Requirement
Personal Computer	1. Intel® Pentium® M, 2.16 GHz or Intel® Core™2 Duo, 2.0 GHz 2. 2 GB RAM or more
Operating System	Windows VISTA/ Windows XP / Windows 7
Web Browser	Microsoft Internet Explorer 6.0 or later Firefox Chrome Safari
Network Card	10Base-T (10 Mbps) or 100Base-TX (100 Mbps) operation
Viewer	ActiveX control plug-in for Microsoft IE

5. Deleting the Existing DC Viewer

For users who have installed the DC Viewer in the PC previously, please first delete the existing DC Viewer from the PC before accessing to the IP Camera.

Deleting the DC Viewer

Go to <Control Panel>, and then double click on <Add or Remove Programs>. In the <Currently installed programs> list, select <DCViewer> and click on the button <Remove> to uninstall the existing DC Viewer as shown in the figure below.

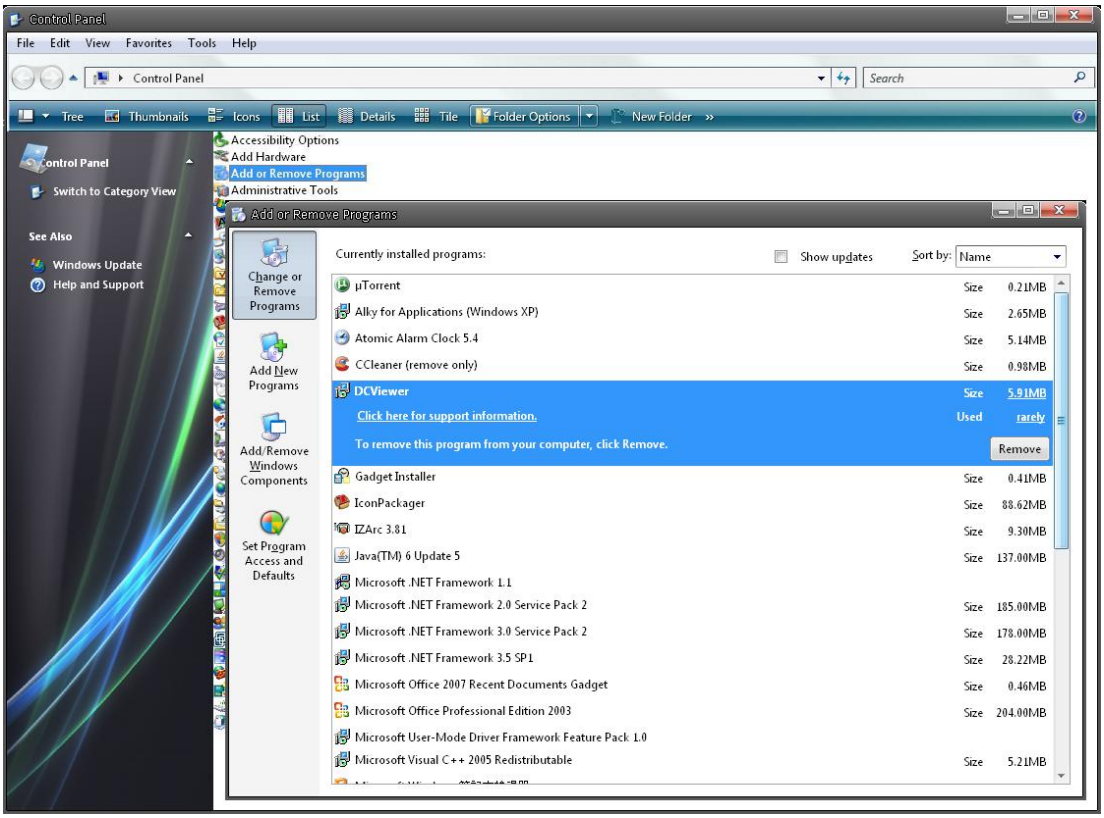
Control Panel
File Edit View Favorites Tools Help
Control Panel
Search
Tree Thumbnails Icons List Details Tile Folder Options New Folder
Accessibility Options
Add Hardware
Add or Remove Programs
Administrative Tools
Control Panel
Switch to Category View
See Also
Windows Update
Help and Support
Add or Remove Programs
Change or Remove Programs
Add New Programs
Add/Remove Windows Components
Set Program Access and Defaults
Currently installed programs:
Show updates
Sort by: Name
µTorrent Size 0.21MB
Alky for Applications (Windows XP) Size 2.65MB
Atomic Alarm Clock 5.4 Size 5.14MB
CCleaner (remove only) Size 0.98MB
DCViewer Size 5.91MB
Click here for support information. Used rarely
To remove this program from your computer, click Remove. Remove
Gadget Installer Size 0.41MB
IconPackager Size 88.62MB
IZArc 3.81 Size 9.30MB
Java(TM) 6 Update 5 Size 137.00MB
Microsoft .NET Framework 1.1
Microsoft .NET Framework 2.0 Service Pack 2 Size 185.00MB
Microsoft .NET Framework 3.0 Service Pack 2 Size 178.00MB
Microsoft .NET Framework 3.5 SP1 Size 28.22MB
Microsoft Office 2007 Recent Documents Gadget Size 0.46MB
Microsoft Office Professional Edition 2003 Size 204.00MB
Microsoft User-Mode Driver Framework Feature Pack 1.0
Microsoft Visual C++ 2005 Redistributable Size 5.21MB

Deleting Temporary Internet Files

To improve browser performance, it is suggested to clean up the all the files in the Temporary Internet Files. The procedure is as follows:

STEP 1: Click on the <Tools> tab and select the option <Internet Options>.

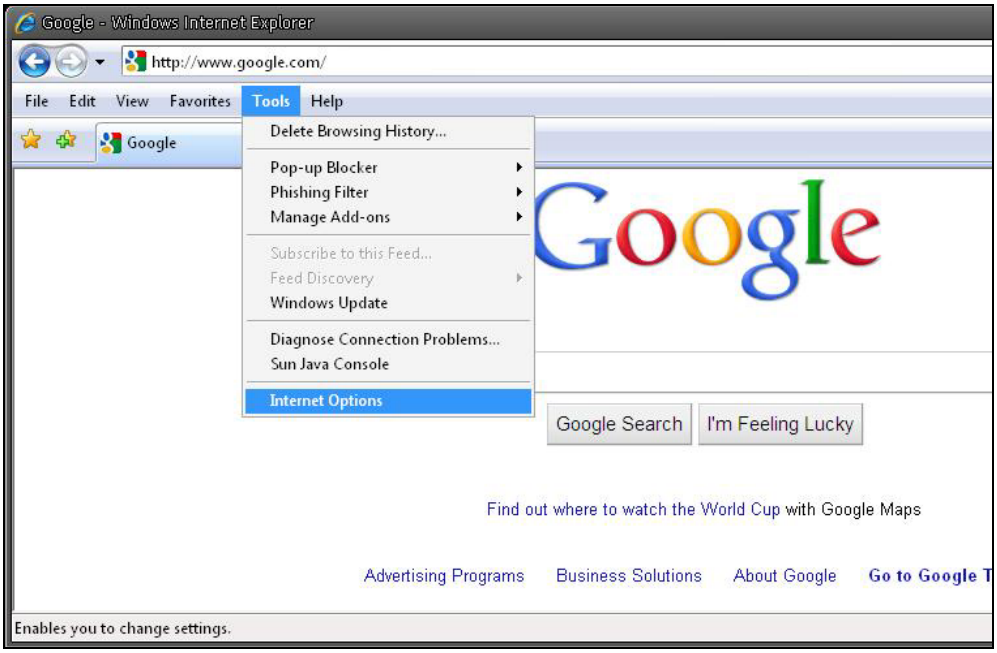

STEP 2: Click on <Delete>, then tap the <Delete Files> in the <Temporary Internet files> section.

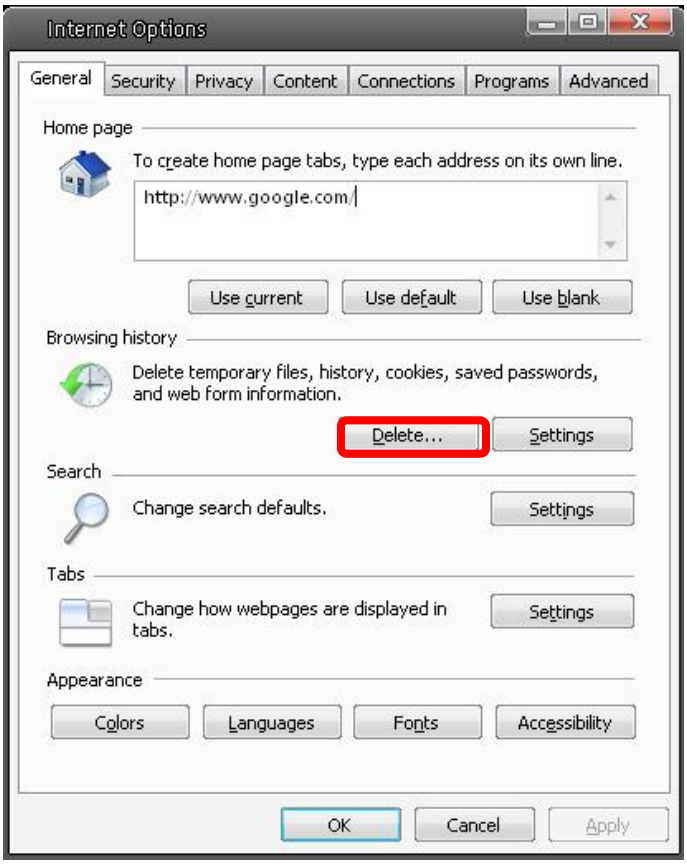

Delete Browsing History
Temporary Internet Files
Copies of webpages, images, and media that are saved for faster viewing.
Delete files...
Cookies
Files stored on your computer by websites to save preferences such as login information.
Delete cookies...
History
List of websites you have visited.
Delete history...
Form data
Saved information that you have typed into forms.
Delete forms...
Passwords
Passwords that are automatically filled in when you log on to a website you've previously visited.
Delete passwords...
About deleting browsing history
Delete all...
Close

The popup window for confirmation will come out as shown below. Click on <Yes> to start deleting the files.

6. Accessing Camera

For initial access to the IP Camera, users can search the camera through the installer program: DeviceSearch.exe, which can be found in <DeviceSearch> folder in the supplied CD.

Device Search Software Setup

Step 1: Double click on the program Device Search.exe (see the icon below); its window will appear as shown below. Then click on the <Device Search> button.

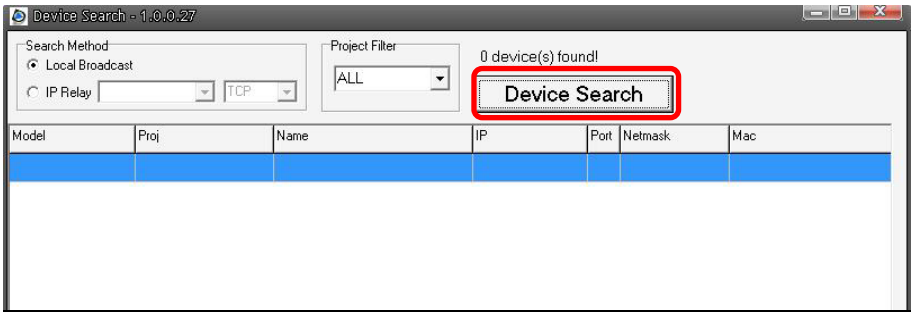

Step 2: The security alert window will pop up. Click on <Unblock> to continue.

Windows Security Alert
To help protect your computer, Windows Firewall has blocked some features of this program.
Do you want to keep blocking this program?
Name: DeviceSearch
Publisher: Unknown
Keep Blocking
Unblock
Ask Me Later
Windows Firewall has blocked this program from accepting connections from the Internet or a network. If you recognize the program or trust the publisher, you can unblock it. When should I unblock a program?

Device Search

Step 3: Click on <Device Search> again, and all the finding IP devices will be listed in the page, as shown in the figure below. The IP Camera's default IP address is: **192.168.0.250**.

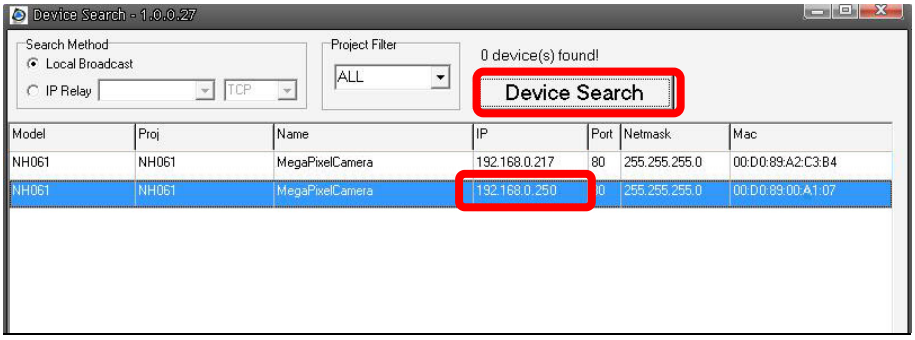

Step 4: Double click or right click and select <Browse> to access the camera directly via web browser.

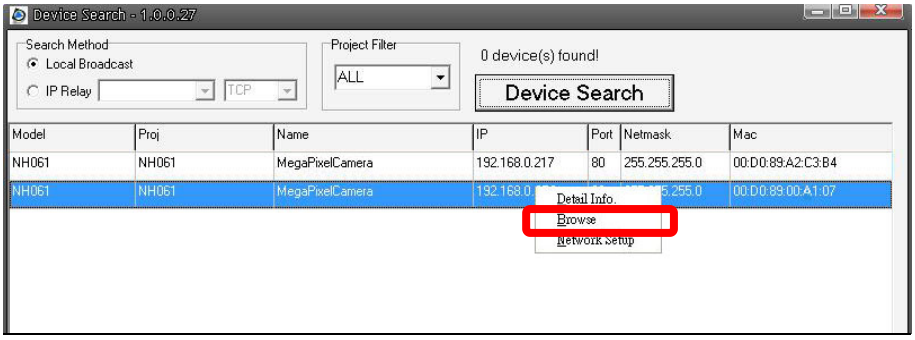

Step 5: Then the prompt window of request for entering default username and password (as shown below) will appear for login to the IP Camera.

The default login ID and password for the Administrator are:

Login ID	Password
Admin	1234

NOTE: ID and password are case sensitive.

NOTE: It is strongly advised that administrator's password be altered for the security concerns. Refer to 7.3.2 Security for further details.

Additionally, users can change the IP Camera's network property, either DHCP or Static IP directly in the device finding list. Refer to the following section for changing the IP Camera's network property.

Example of Changing IP Camera's Network Property

Users can directly change an IP Camera's network property, ex. from static IP to DHCP, in the finding device list. The way to change the IP Camera's network property is specified below:

Step 1: In the finding device list, click on the IP Camera that you would like to change its network property. On the selected item, right click and select <Network Setup>. Meanwhile, record the IP Camera's MAC address, for future identification.

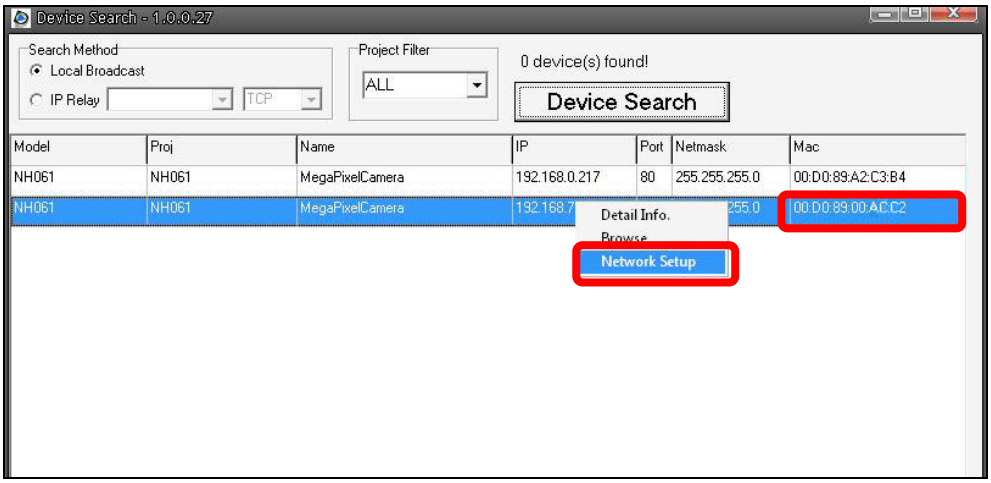

Step 2: The <Network Setup> page will come out. Select <DHCP>, and click on <Apply> button down the page.

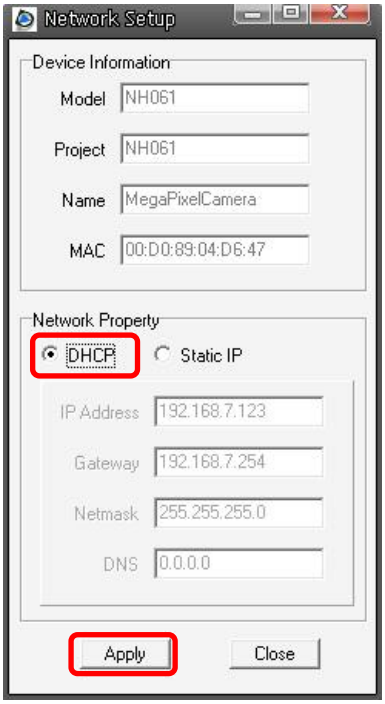

Step 3: Click on <OK> on the Note of setting change. Wait for one minute to re-search the IP Camera.

Step 4: Click on the <Device Search> button to re-search all the devices. Then select the IP Camera with the correct MAC address. Double click on the IP Camera, and the login window will come out.

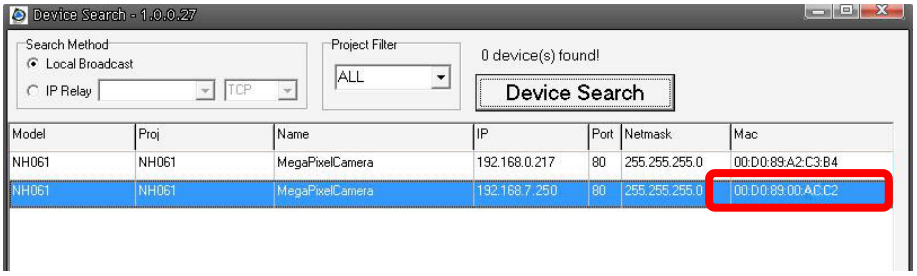

Step 5: Enter User name and Password to access the IP Camera.

Installing DC Viewer Software Online

For the initial access to the IP Camera, a client program, DC Viewer, will be automatically installed to your PC when connecting to the IP Camera.

If the Web browser doesn't allow DC Viewer installation, please check the Internet security settings or ActiveX controls and plug-ins settings (refer to Appendix B: Internet Security Settings) to continue the process.

The Information Bar (just below the URL bar) may come out and ask for permission to install the ActiveX Control for displaying video in browser (see the figure below). Right click on the Information Bar and select <Install ActiveX Control…> to allow the installation.

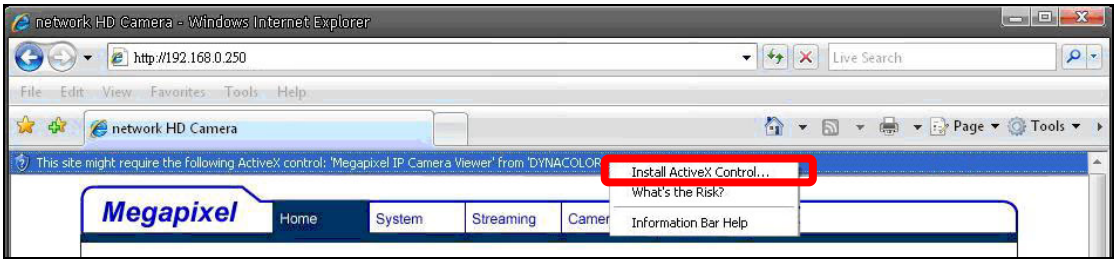

Then the security warning window will pop up. Click on <Install> to carry on software installation.

Click on <Finish> to close the DC Viewer window when download is finished. For the detailed software download procedure, please refer to Appendix C: DC Viewer Download Procedure.

Once login to the IP Camera, users will see the Home page as shown below:

Fixed-focal/ Vari-focal lens Model

Motorized Lens Model

Administrator/User Privileges

“Administrator” represents the person who can configure the IP Camera and authorize users access to the camera; ”User” refers to whoever has access to the camera with limited authority, i.e. entering Home and Camera setting pages.

Image and Focus Adjustment

The image displays on the Home page when successfully accessing to the IP Camera. Adjust zoom and focus as necessary to produce a clear image.

7. Configuration & Operation

The IP Camera is provided with a user-friendly browser-based configuration interface, and a free bundled CMS (Central Management System) for video playback and recording. In this chapter, information about main page introduction, system related settings and camera settings will be described in detail.

For further information about CMS software, please refer to 8. CMS Software Introduction and CMS user's manual.

7.1 Browser-based Viewer Introduction

The figure below shows the main page of the IP Camera user interface.

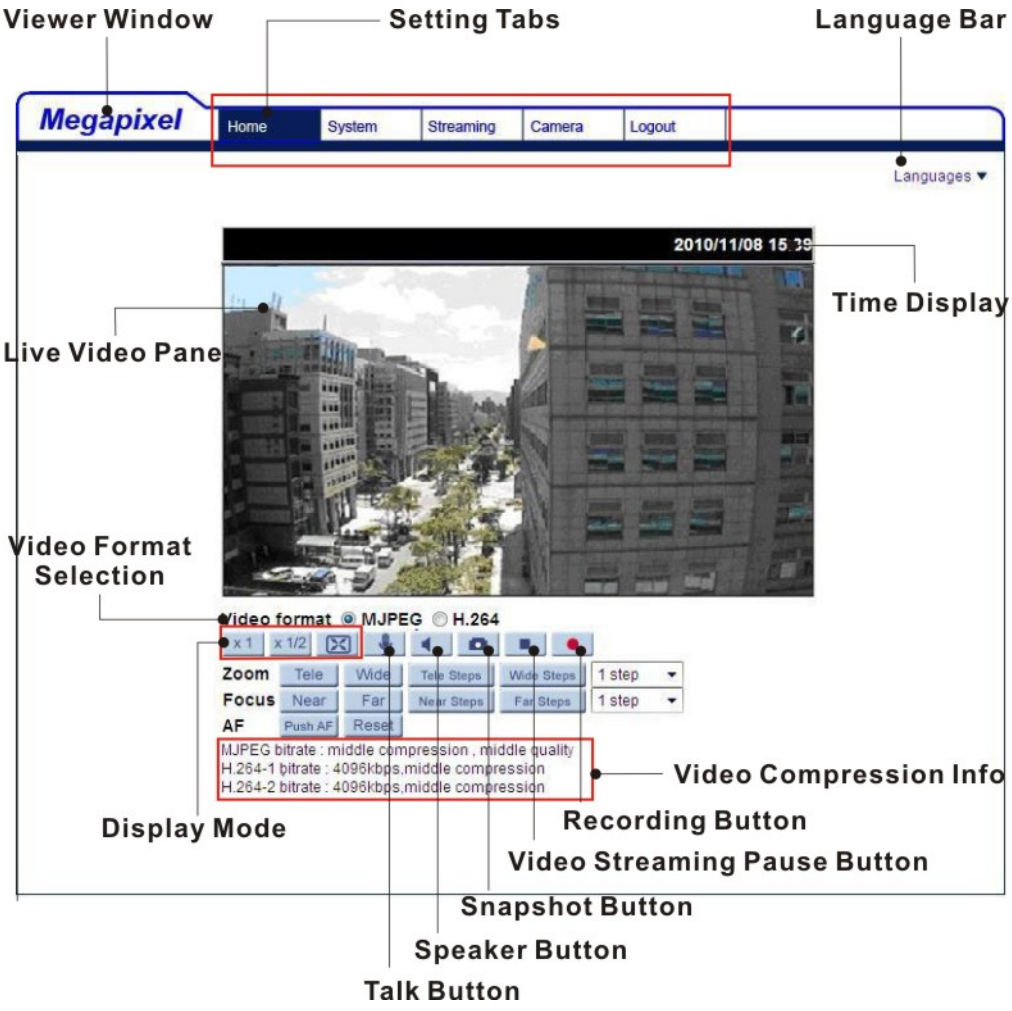

There are five tabs: Home, System, Streaming, Camera and Logout on the top panel.

Home

Users can monitor live video of the targeted area.

System setting

The administrator can set host name, system time, root password, network related settings, etc. Further details will be interpreted in 7.3 System Related Settings.

Streaming setting

The administrator can modify video resolution and rotate type and select audio compression mode in this page.

Camera setting

Users can adjust various camera parameters, including <Exposure>, <White Balance>, <Brightness>, <Sharpness>, <Contrast>, <Saturation>, <Hue> and < TV System>.

Logout

Click on the tab to re-login the IP Camera with another username and password.

7.2 Home Page

In the Home page, there are several function buttons right down the displayed image.

7.2.1 Fixed-focal/Vari-focal Lens Model

Multiple Languages Support

Multiple languages are supported, including English, French, German, Italian, Korean, Simplified Chinese, Russian, etc. for the viewer window interface.

Screen Size Adjustment

Image display size can be adjusted to x1/2 and full screen.

Digital Zoom Control

In the full screen mode, users can implement digital PTZ by rotating the mouse wheel (for zoom in/out), and drag the mouse into any direction.

Talk button  (on/off)

Talk function allows the local site to talk to the remote site. Click on the button to switch it to on/off. Please refer to 7.3.2 Security: Add user >> Talk/Listen for further details. This function is only open to ”User” who has been granted this privilege by the Administrator.

Speaker button (on/off)

Click on the <Speaker> button to mute/activate the audio.

Snapshot button

Click on the button, and the JPEG snapshots will automatically be saved in the specified place. The default place of saving snapshots is: C:\. To change the storage location, please refer to 7.3.14 File Location for further details.

NOTE: For users with Windows 7 operating system, it is required to log on as an Administrator to implement the Snapshot function.

Video Streaming Pause /Restart button (pause/restart)

Click on the <Pause> button to disable video streaming, the live video will be displayed as black. Click on the <Restart> button to show the live video again.

Web Recording button (on/off)

Click on the <Recording> button and the recordings from the Live View will be directly to the specific location on the local hard drive, which could be configured in the <File Location> (snapshot) page. The default storage location for the web recording is: C:\. Please refer to 7.3.14 File Location for further details.

NOTE: For users with Windows 7 operating system, it is required to log on as an Administrator to implement the Snapshot function.

7.2.2 Motorized Lens Model

Multiple Languages Support

Multiple languages are supported, including English, French, German, Italian, Korean, Simplified Chinese, Russian, etc. for the viewer window interface.

Screen Size Adjustment

Image display size can be adjusted to x1/2 and full screen.

Digital Zoom Control

In the full screen mode, users can implement digital PTZ by rotating the mouse wheel (for zoom in/out), and drag the mouse into any direction.

Talk button (on/off)

Talk function allows the local site to talk to the remote site. Click on the button to switch it to on/off. Please refer to 7.3.2 Security: Add user >> Talk/Listen for further details. This function is only open to ”User” who has been granted this privilege by the Administrator.

Speaker button (on/off)

Click on the <Speaker> button to mute/activate the audio.

Snapshot button

Click on the button, and the JPEG snapshots will automatically be saved in the appointed place. The default place of saving snapshots is: C:\. To change the storage location, please refer to 7.3.14 File Location for further details.

NOTE: For users with Windows 7 operating system, it is required to log on as an Administrator to implement the Snapshot function.

Video Streaming Pause/Restart button (pause/restart)

Click on the <Pause> button to disable video streaming, the live video will be displayed as black. Click on the <Restart> button to show the live video again.

Web Recording button (on/off)

Click on the <Recording> button and the recordings from the Live View will be saved directly to the specified location on the local hard drive, which could be configured in the <File Location> (snapshot) page. The default storage location for the web recording is: C:\. Please refer to 7.3.14 File Location for further details.

NOTE: For users with Windows 7 operating system, it is required to log on as an Administrator to implement the Snapshot function.

Tele/Wide buttons

Hold the Tele/Wide button, and implement continuous zoom adjustment.

Near/Far buttons

Hold the Near/Far button, and implement continuous focus adjustment

Tele/Wide Steps buttons

Pressing the Tele/Wide Steps buttons will lead zoom to be shifted toward Tele/Wide sides in user-defined range, which can be selected from the drop-down menu.

Near/Far Steps buttons

Pressing the Near/Far buttons will lead focus to be altered toward Near/Far sides in user-defined range, which can be selected from the drop-down menu.

Push AF button

Please click on the <Push AF> button once Zoom or Focus is adjusted.

Reset button

Click on the <Reset> button, and the camera lens will be calibrated at full wide end and infinity focus at once.

7.3 System Related Settings

The figure below shows all categories under the <**System**> tab. Each category in the left column will be explained in the following sections.

NOTE: The <System> configuration page is only accessible by Administrator.

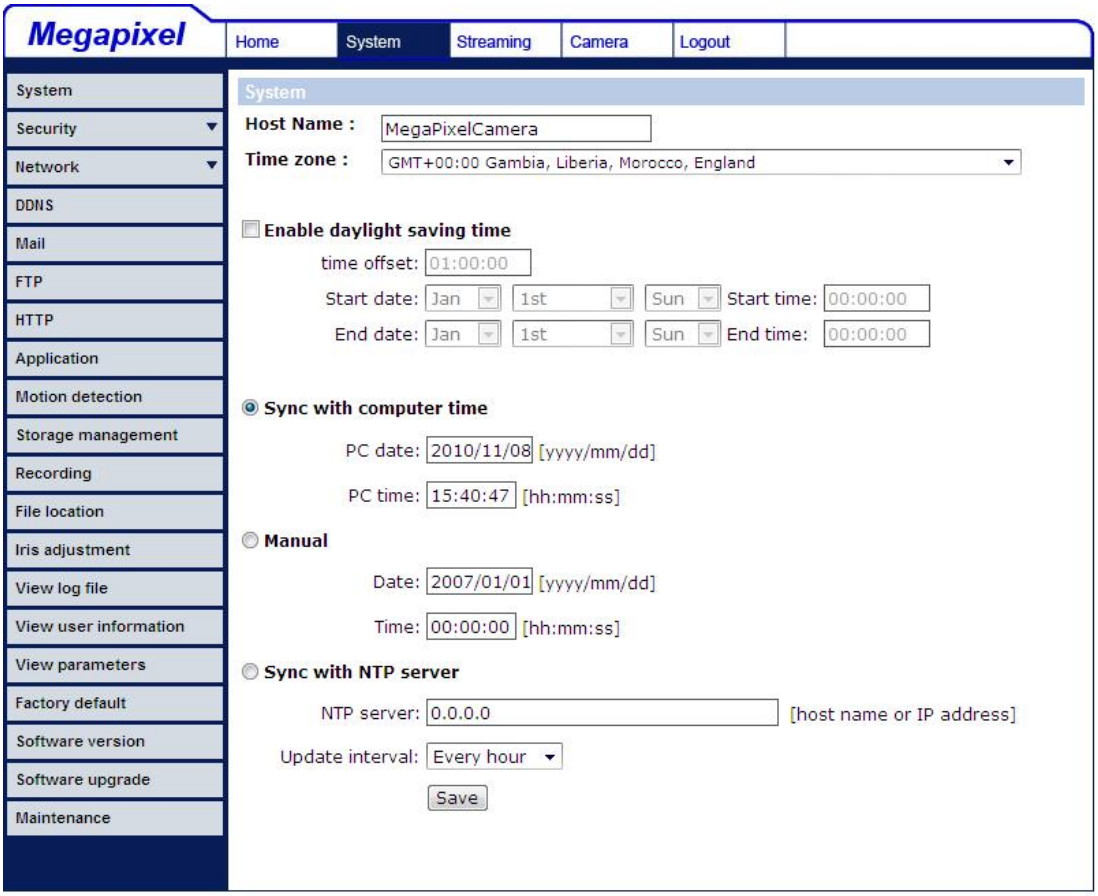

7.3.1 Host Name and System Time Setting

Click on the first category: <System> in the left column; the page is shown as below.

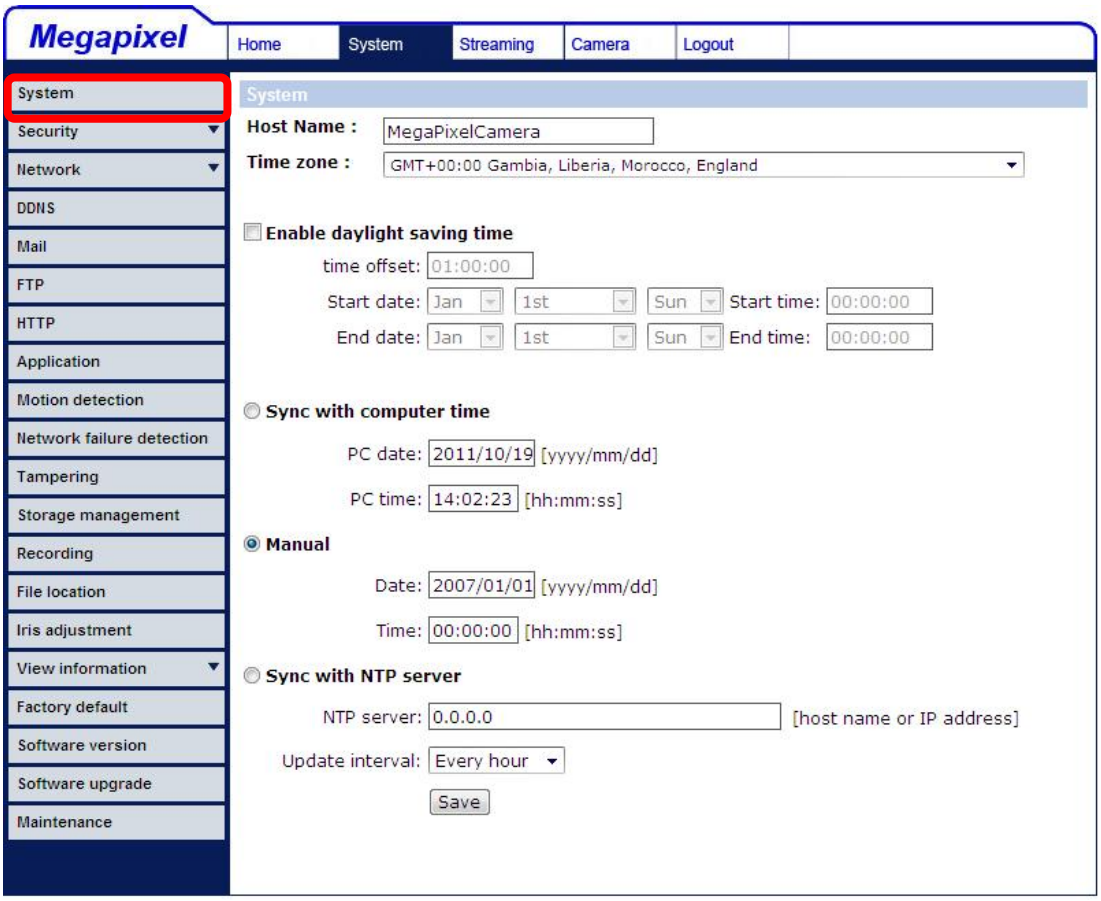

Host Name

The name is for camera identification. If alarm function (refer to 7.3.8 Application is enabled and is set to send alarm message by Mail/FTP, the host name entered here will display in the alarm message. The maximum length of the Host Name is 30 characters.

Time Zone

Select the time zone you are in from the drop-down menu.

Enable Daylight Saving Time

To enable DST, please check the item and then specify time offset and DST duration. The format for time offset is [hh:mm:ss]; for instance, if the amount of time offset is one hour, please enter ”01:00:00” into the field.

Sync With Computer Time

Select the item, and video date and time display will synchronize with the PC's.

Manual

The Administrator can set video date, time and day manually. Entry format should be identical with that shown next to the enter field.

Sync with NTP Server

Network Time Protocol (NTP) is an alternate way to synchronize your camera's clock with a NTP server. Please specify the server you wish to synchronize in the enter field. Then select an update interval from the drop-down menu. For further information about NTP, please see the web site: www.ntp.org.

7.3.2 Security

Click on the category: <Security>, there will be a drop-down menu with tabs including <User>, <HTTPS>, <IP Filter>, and <IEEE 802.1X>.

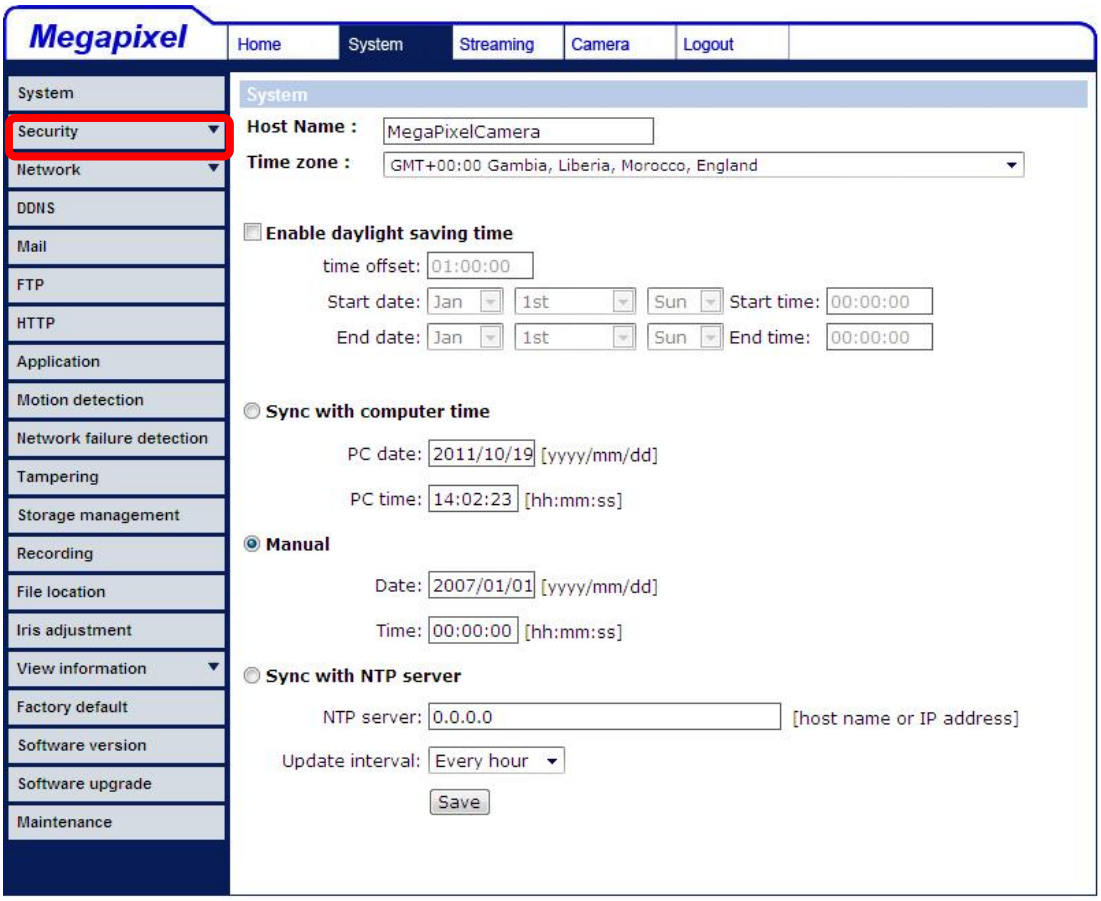

7.3.2.1 User

Click on the <User> tab under the category <Security> and the page is shown as the figure below.

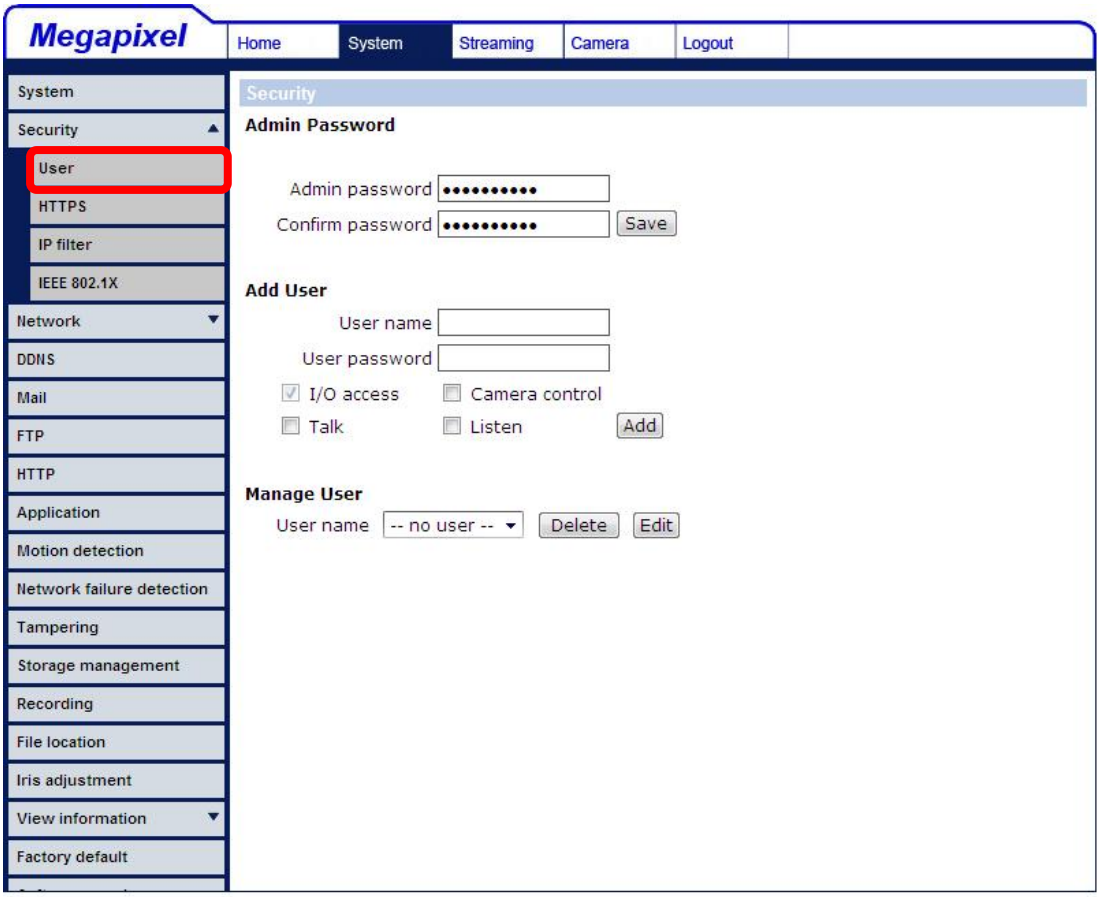

Root password

Change the administrator's password by inputting the new password in both text boxes. The input characters/numbers will be displayed as dots for security purposes. After clicking <Save>, the web browser will ask the Administrator for the new password for access. The maximum length of the password is 14 characters.

NOTE: The following characters are valid: A-Z, a-z, 0-9, !#$%&'-.@^_~.

Add user

Type the new user's name and password and click on <Add> to add the new user. User name and password can be up to 16 characters, and the maximum length of the password is 14 characters. The new user will be displayed in the user name list. There is a maximum of twenty user accounts. Each user can be assigned the privileges of **<Camera control>**, **<Talk>** and **<Listen>**.

- **I/O access**
  This item supports fundamental functions that enable users to view video when accessing to the camera.

- **Camera control**
  This item allows the specified User to change camera parameters on the Camera Setting page.

- **Talk/Listen**
  Talk and Listen functions allow the appointed user in the local site (PC site) communicating with, for instance, the administrator in the remote site.

Manage User

- **Delete user**
  To delete a user, pull down the user list, and select the user name you wish to delete. Then click on <Delete> to remove it.

- **Edit user**
  Pull down the user list and select a user name. Click on <Edit> to edit the user's password and privilege.

NOTE: It is required to enter the User password as well as select the function open to the user. When finished, click on <Save> to modify the account authority.

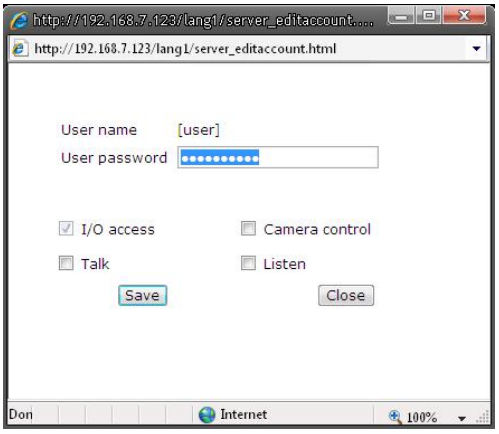

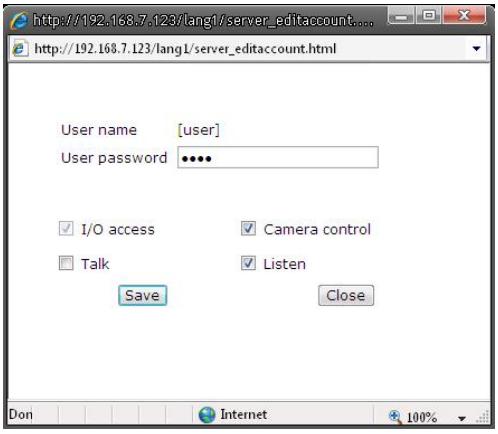

7.3.2.2 HTTPS

<HTTPS> allows secure connections between the IP Camera and web browser using <Secure Socket Layer (SSL)> or <Transport Layer Security (TLS)>, which ensure camera settings or Username/ Password info from snooping. It is required to install a self-signed certificate or a CA-signed certificate for implementing <HTTPS>.

Click on the <HTTPS> tab, and the HTTPS setting page is shown as the figure below.

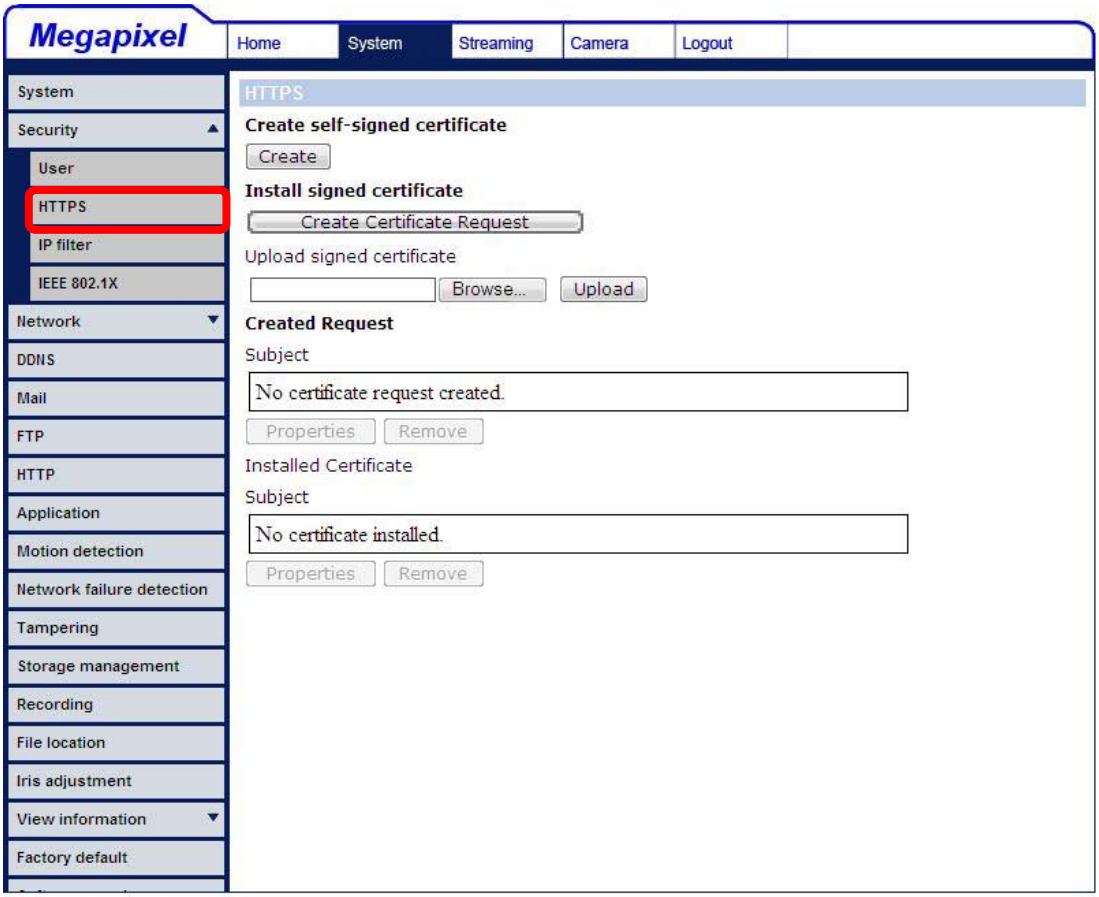

To use HTTPS on the IP Camera, a HTTPS certificate must be installed. The HTTPS certificate can be obtained by either creating and sending a certificate request to a Certificate Authority (CA) or creating a self-signed HTTPS certificate, as described below.

Create Self-signed Certificate

Before a CA-issued certificate is obtained, users can create and install a self-signed certificate first.

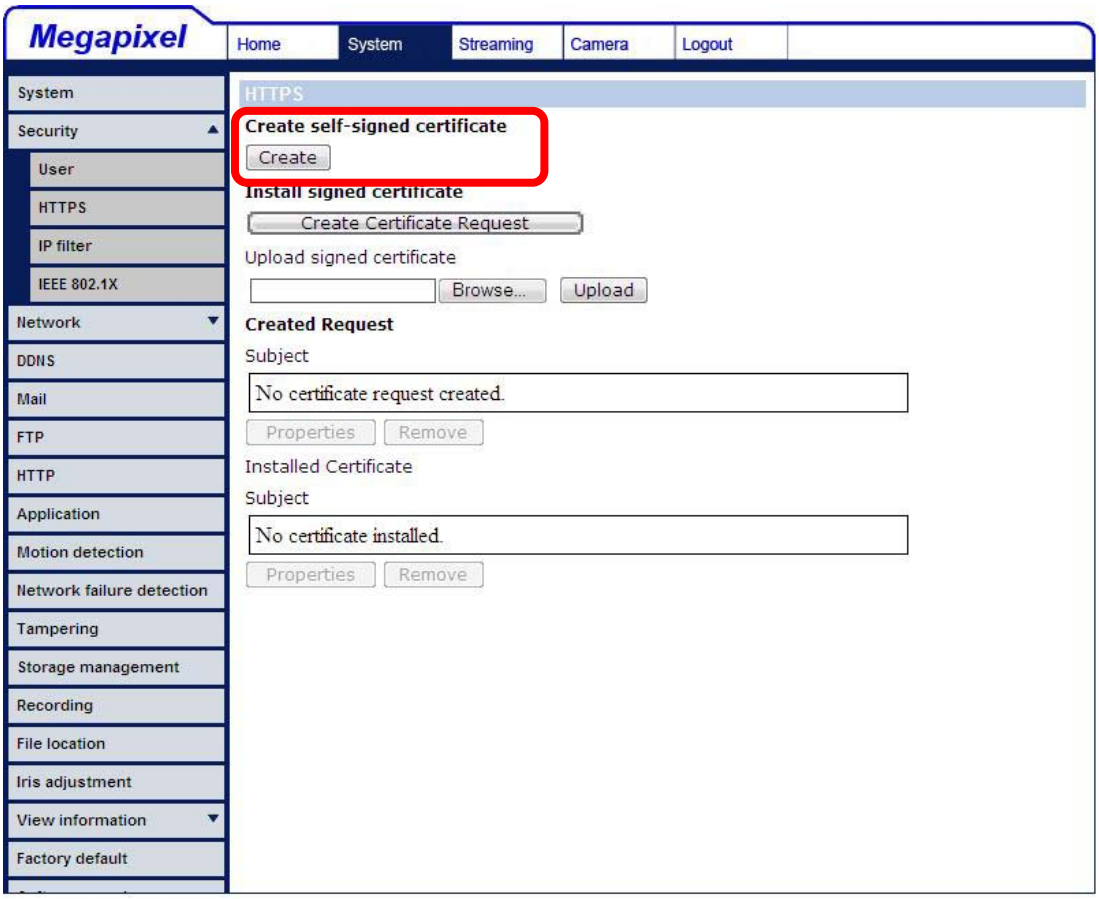

Click on <Create> button under <Create self-signed certificate> and provide the requested information to install a self-signed certificate for the IP Camera. Please refer to the last part of this section: Provide the Certificate Information for more details.

NOTE: The self-signed certificate does not provide the same high level of security as when using a CA-issued certificate.

Create Certificate Request

Click on the <Create Certificate Request> button to create and submit a certificate request in order to obtain a signed certificate from CA.

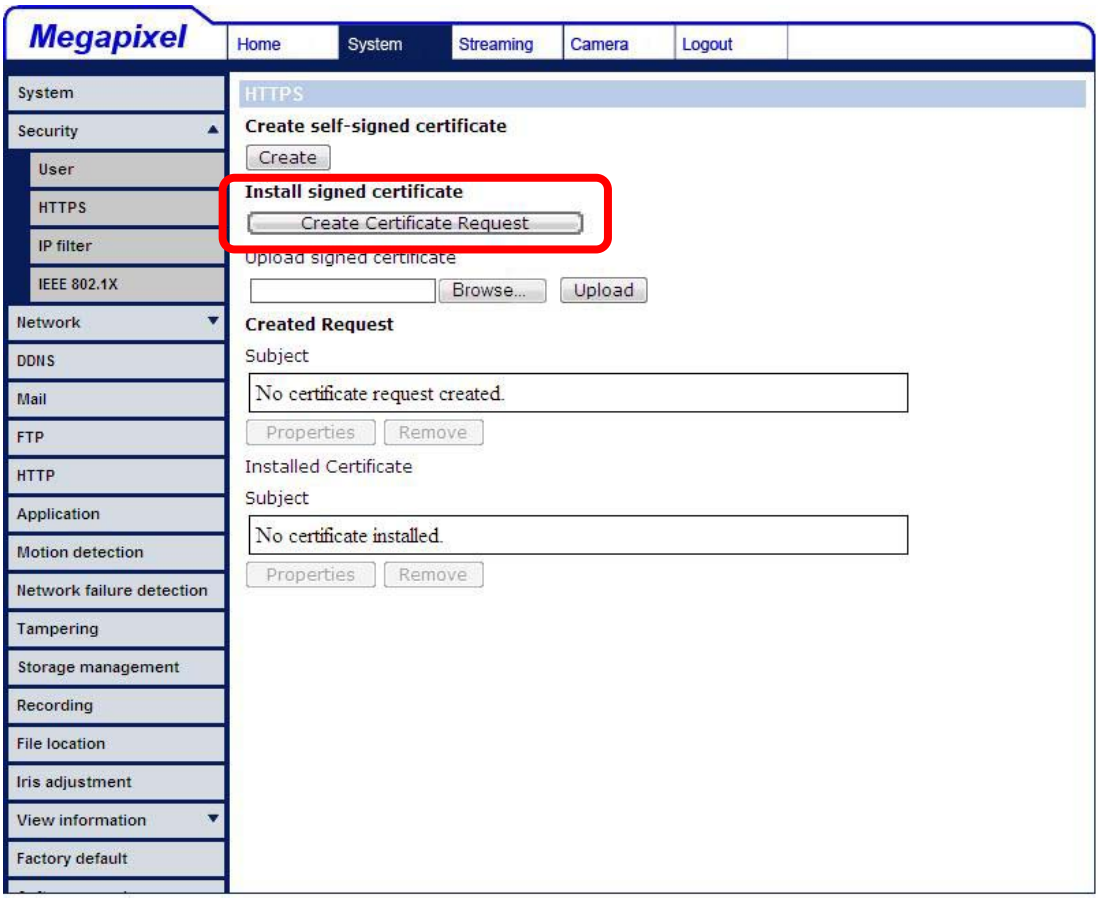

Provide the request information in the create dialog. Please refer to the following Provide the Certificate Information for more details.

When the request is complete, the subject of the Created Request will be shown in the field. Click on <Properties> below the Subject field, copy the PEM-formatted request and send it to your selected CA.

When the signed certificate is returned, install it by uploading the signed certificate.

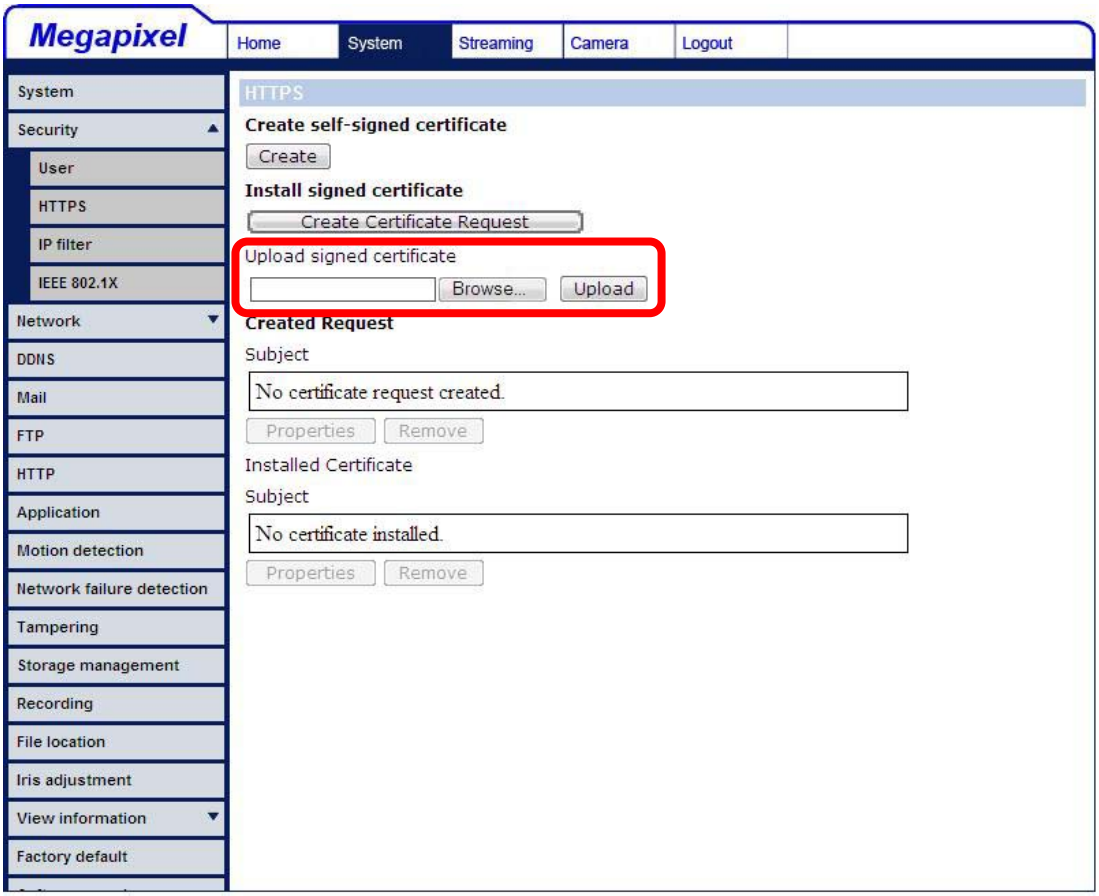

Provide the Certificate Information

To create a Self-signed HTTPS Certificate or a Certificate Request to CA, please enter the information as requested:

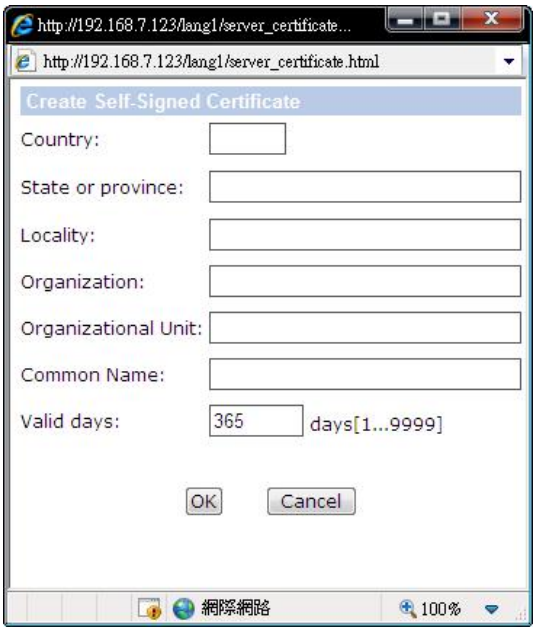

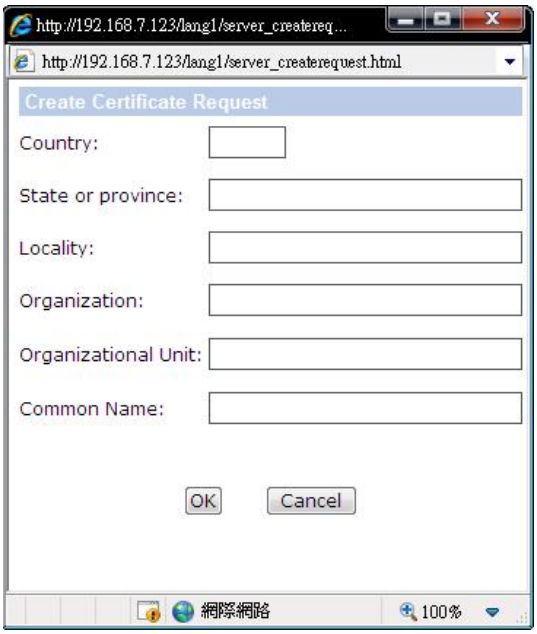

- **Country**
  Enter a 2-letter combination code to indicate the country the certificate will be used in. For instance, type in ”US” to indicate United States.

- **State or province**
  Enter the local administrative region.

- **Locality**
  Enter other geographical information.

- **Organization**
  Enter the name of the organization to which the entity identified in ”Common Name” belongs.

- **Organization Unit**
  Enter the name of the organizational unit to which the entity identified in ”Common Name” belongs.

- **Common Name**
  Indicate the name of the person or other entity that the certificate identifies (often used to identify the website).

- **Valid days (Self-signed Certificate Only)**
  Enter the period in days (1~9999) to indicate the valid period of certificate.

Click on <OK> to save the Certificate Information after complete.

7.3.2.3 IP Filter

Using the IP filter, access to the IP Camera can be restricted by denying/allowing specific IP addresses.

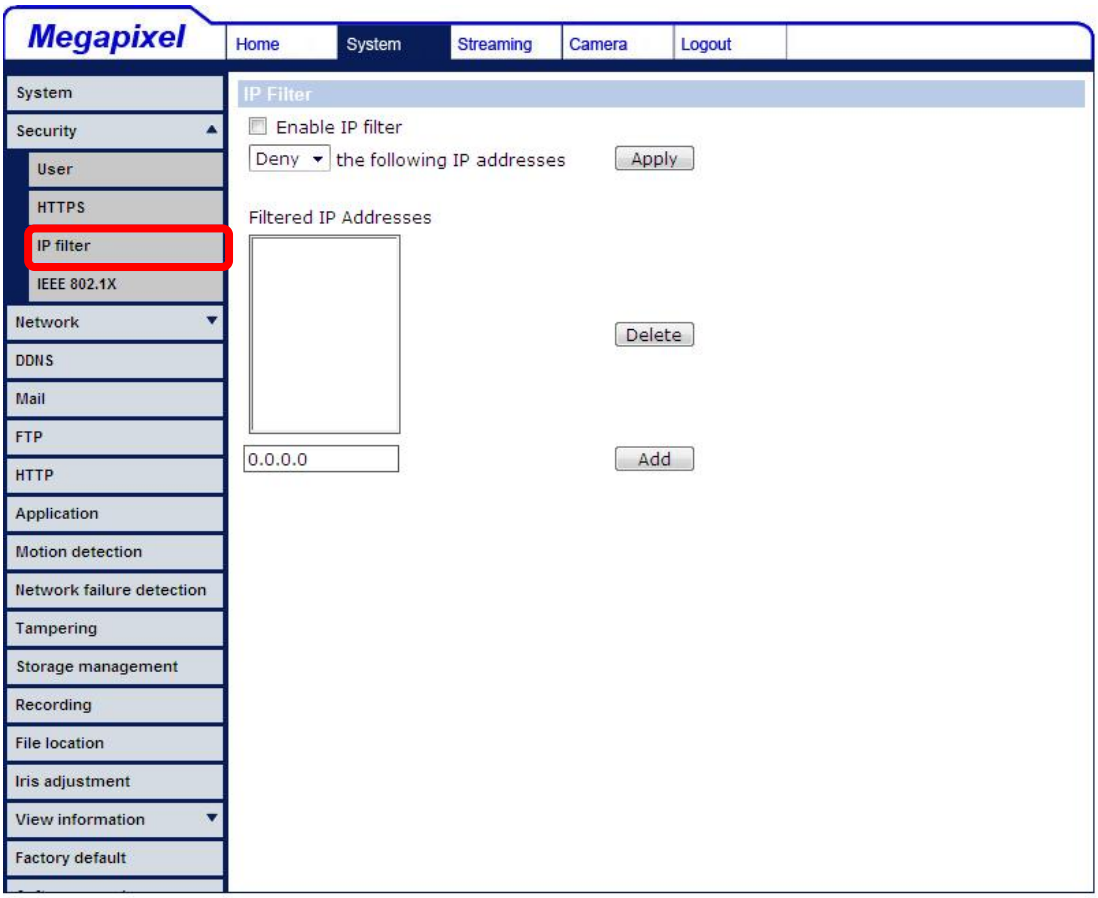

General

- **Enable IP Filter**
  Check the box to enable the IP Filter function. Once enabled, the listed IP addresses (IPv4) will be allowed/ denied access to the IP Camera.

  Select <Allow> or <Deny> from the drop-down list and click on the <Apply> button to determine the IP Filter behavior.

- **Add/ Delete IP Address**
  Input the IP address and click on the <Add> button to add a new filtered address.

  The Filtered IP Addresses list box shows the currently configured IP addresses. Up to 256 IP address entries may be specified.

  To remove an IP address from the list, please select the IP and then click on the <Delete> button.

7.3.2.4 IEEE 802.1X

The IP Camera is allowed to access a network protected by 802.1X/EAPOL (Extensible Authentication Protocol over LAN).

Users need to contact with the network administrator for gaining certificates, user IDs and passwords

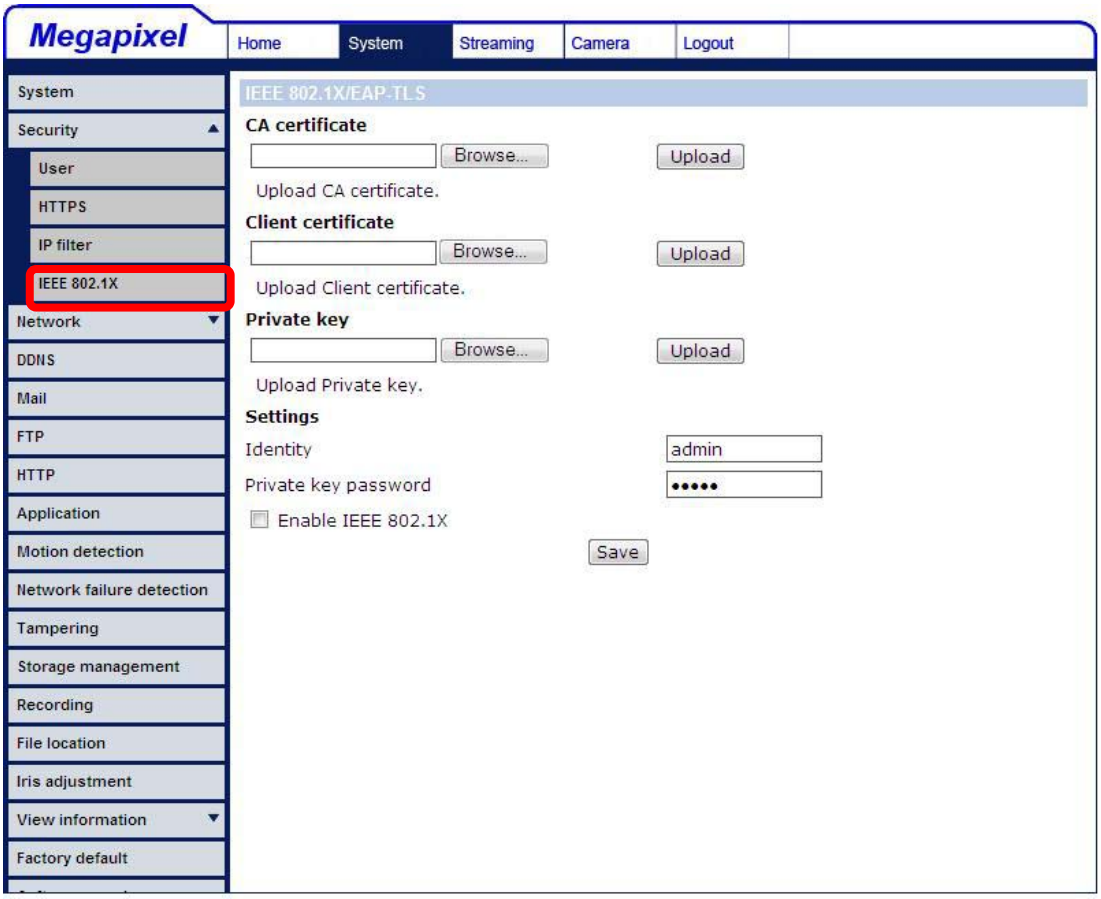

CA Certificate

The CA certificate is created by the Certification Authority for the purpose of validating itself. Upload the certificate for checking the server's identity.

Client Certificate/ Private Key

Upload the Client Certificate and Private Key for authenticating the IP Camera itself.

Settings

- **Identity**
  Enter the user identity associated with the certificate. Up to 16 characters can be used.

- **Private Key Password**
  Enter the password (maximum 16 characters) for your user identity.

Enable IEEE 802.1X

Check the box to enable IEEE 802.1X.

Click on <Save> to save the IEEE 802.1X/ EAP- TLS setting.

7.3.3 Network

Click on the category: < Network>, there will be a drop-down menu with tabs including <Basic>, <QoS>, <SNMP>, and <UPnP>.

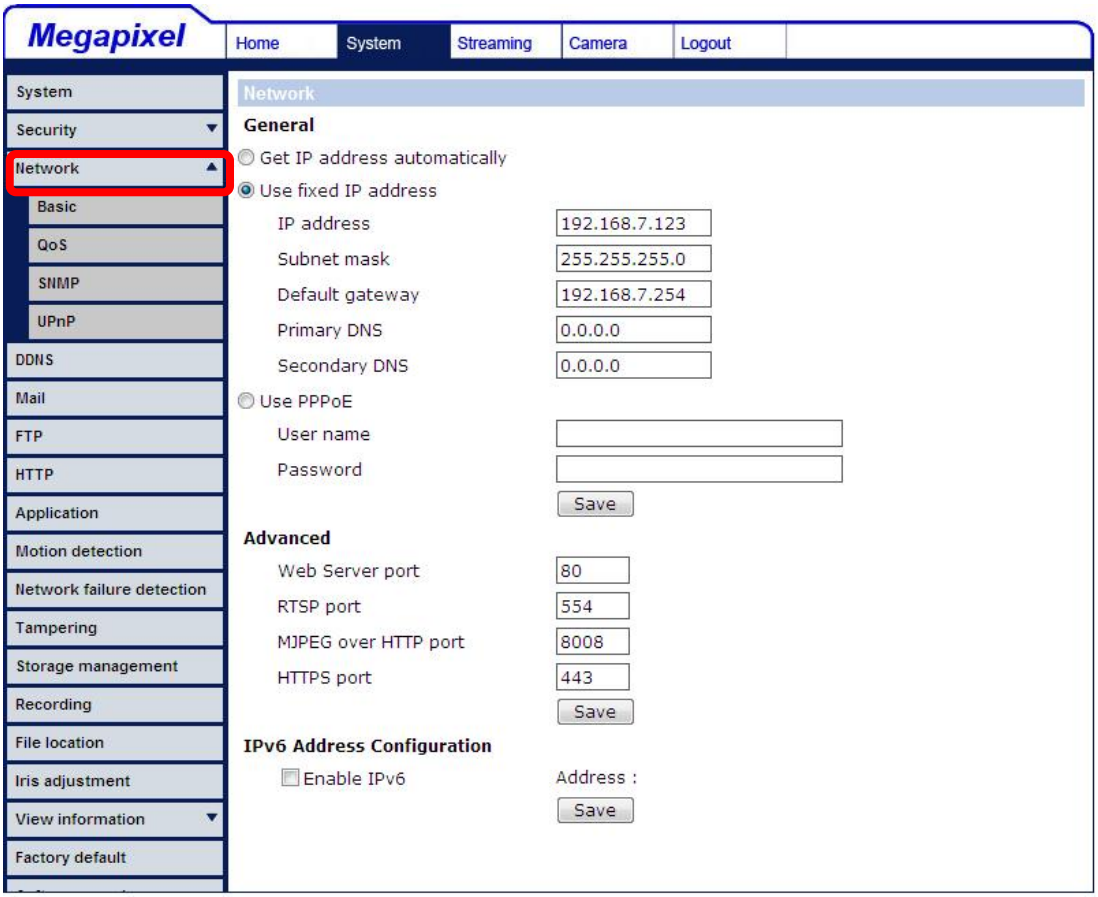

7.3.3.1 Basic

Users can choose to connect to the IP Camera with fixed or dynamic (DHCP) IP address. The IP Camera also provides PPPoE (Point-to-Point Protocol over Ethernet) support for users who connect to the network via PPPoE.

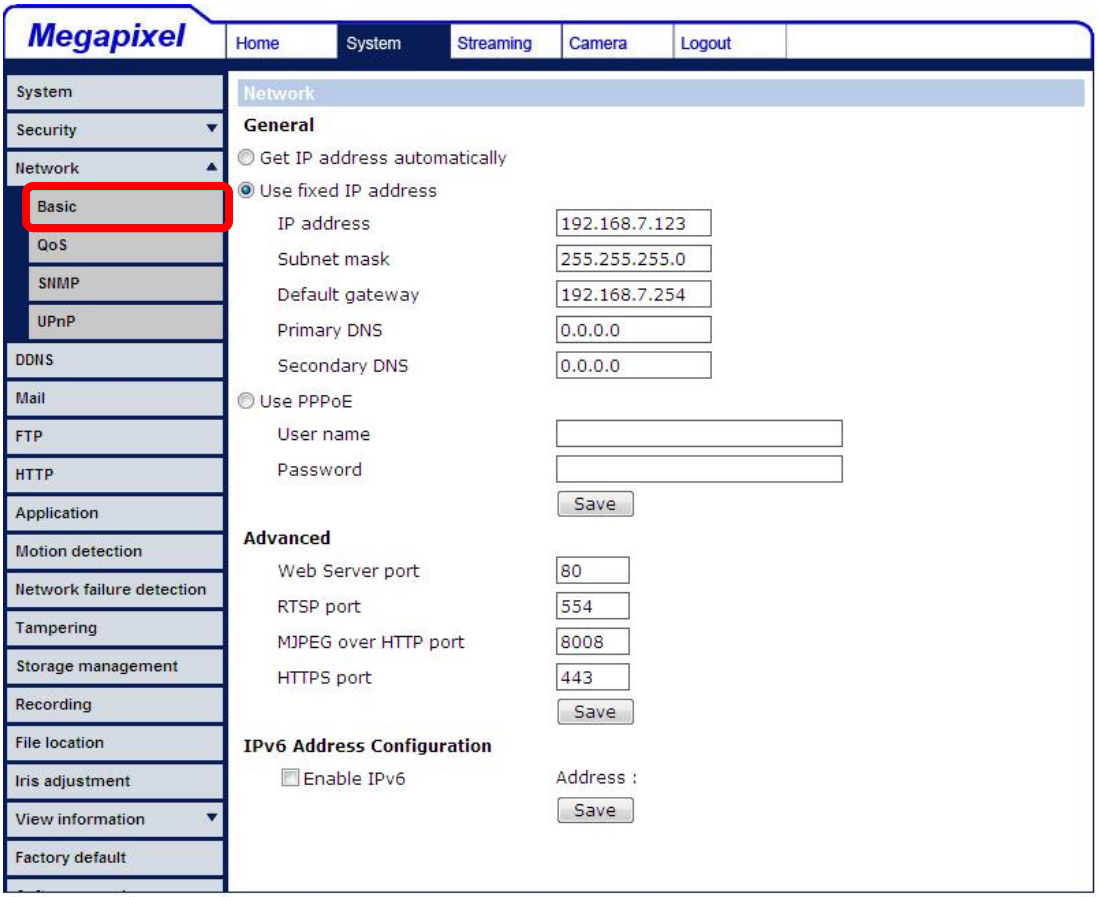

Get IP address automatically (DHCP)

The camera's default setting is <**Use fixed IP address**>. Please refer to 6. Accessing Camera for login with the default IP address.

If select <**Get IP address automatically**>, after the IP Camera restarts, users can search it through the installer program: DeviceSearch.exe, which can be found in <DeviceSearch> folder in the supplied CD.

NOTE: Please make the record of the IP Camera's MAC address, which can be found in the label of the camera, for identification in the future.

Use fixed IP address

To setup static IP address, select <**Use fixed IP address**> and move the cursor to the IP address blank (as indicated below) and insert the new IP address, ex. 192.168.7.123; then go to the Default gateway (explained latter) blank and change the setting, ex. 192.168.7.254. Click on <Save> to confirm the new setting.

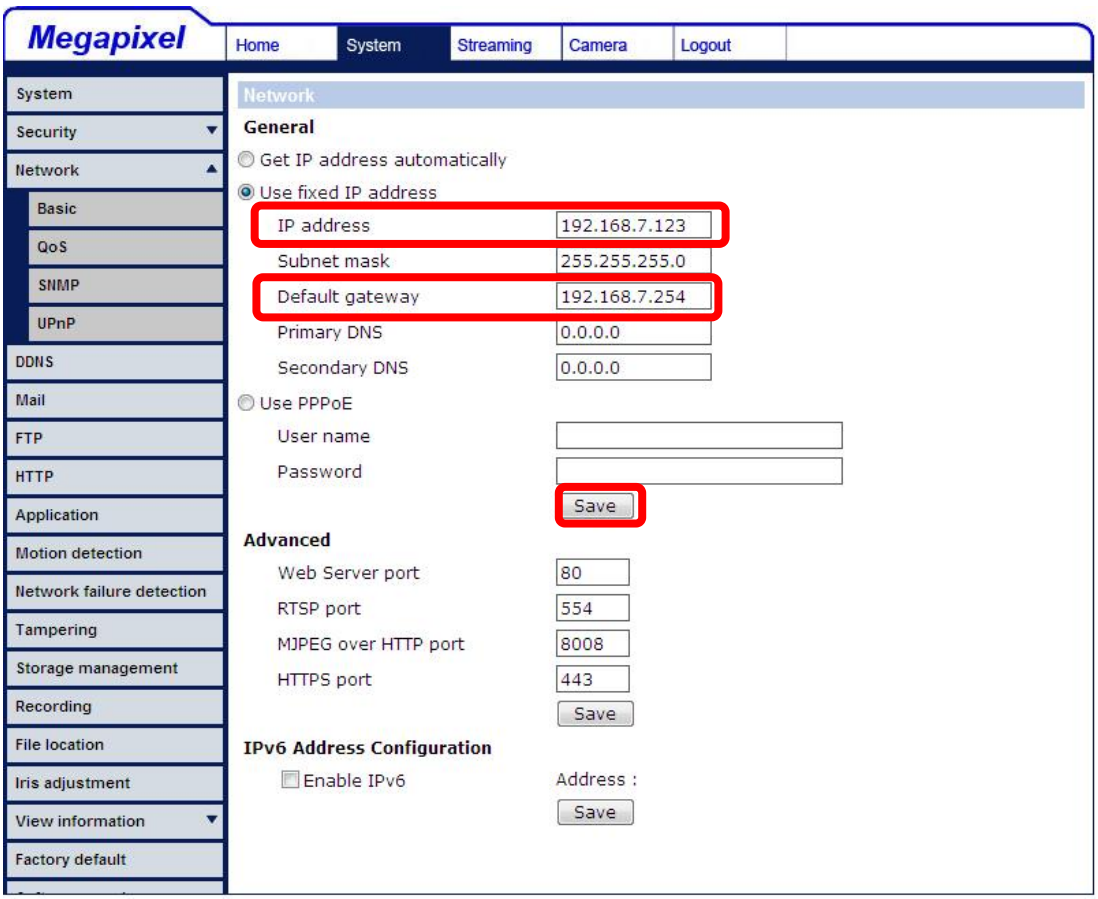

When using static IP address to login to the IP Camera, users can access it either through <DeviceSearch> software (refer to 6. Accessing Camera) or input the IP address in the URL bar and click on <Enter>.

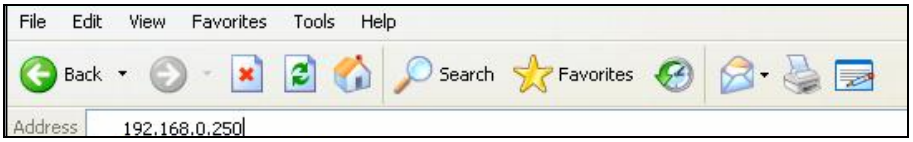

- **IP address**
  This is necessary for network identification.

- **Subnet mask**
  It is used to determine if the destination is in the same subnet. The default value is ”255.255.255.0”.

- **Default gateway**
  This is the gateway used to forward frames to destinations in different subnet. Invalid gateway setting will fail the transmission to destinations in different subnet.

- **Primary DNS**
  Primary DNS is the primary domain name server that translates hostnames into IP addresses.

- **Secondary DNS**
  Secondary DNS is a secondary domain name server that backups the primary DNS.

Use PPPoE

For the PPPoE users, enter the PPPoE Username and Password into the fields, and click on the <Save> button to complete the setting.

Advanced

- **Web Server port**
  The default web server port is 80. Once the port is changed, the user must be notified the change for the connection to be successful. For instance, when the Administrator changes the HTTP port of the IP Camera whose IP address is 192.168.0.100 from 80 to 8080, the user must type in the web browser ”http://192.168.0.100:8080” instead of http://192.168.0.100.

- **RTSP port**
  The default setting of RTSP Port is 554; the setting range is from 1024 to 65535.

- **MJPEG over HTTP port**
  The default setting of MJPEG over HTTP Port is 8008; the setting range is from 1024 to 65535.

- **HTTPS port**
  The default setting of HTTPS Port is 443; the setting range is from 1024 to 65535.

NOTE: Be aware to assign a different port number for each separate service mentioned above.

IPv6 Address Configuration

With IPv6 support, users can use the corresponding IPv6 address for browsing. Enable IPv6 by checking the box and click on <Save> to complete the setting.

7.3.3.2 QoS (Quality of Service)

QoS allows providing differentiated service levels for different types of traffic packets, which guarantees delivery of priority services especially when network congestion occurs. Adapting the Differentiated Services (DiffServ) model, traffic flows are classified and marked with DSCP (DiffServ Codepoint) values, and thus receive the corresponding forwarding treatment from DiffServ capable routers.

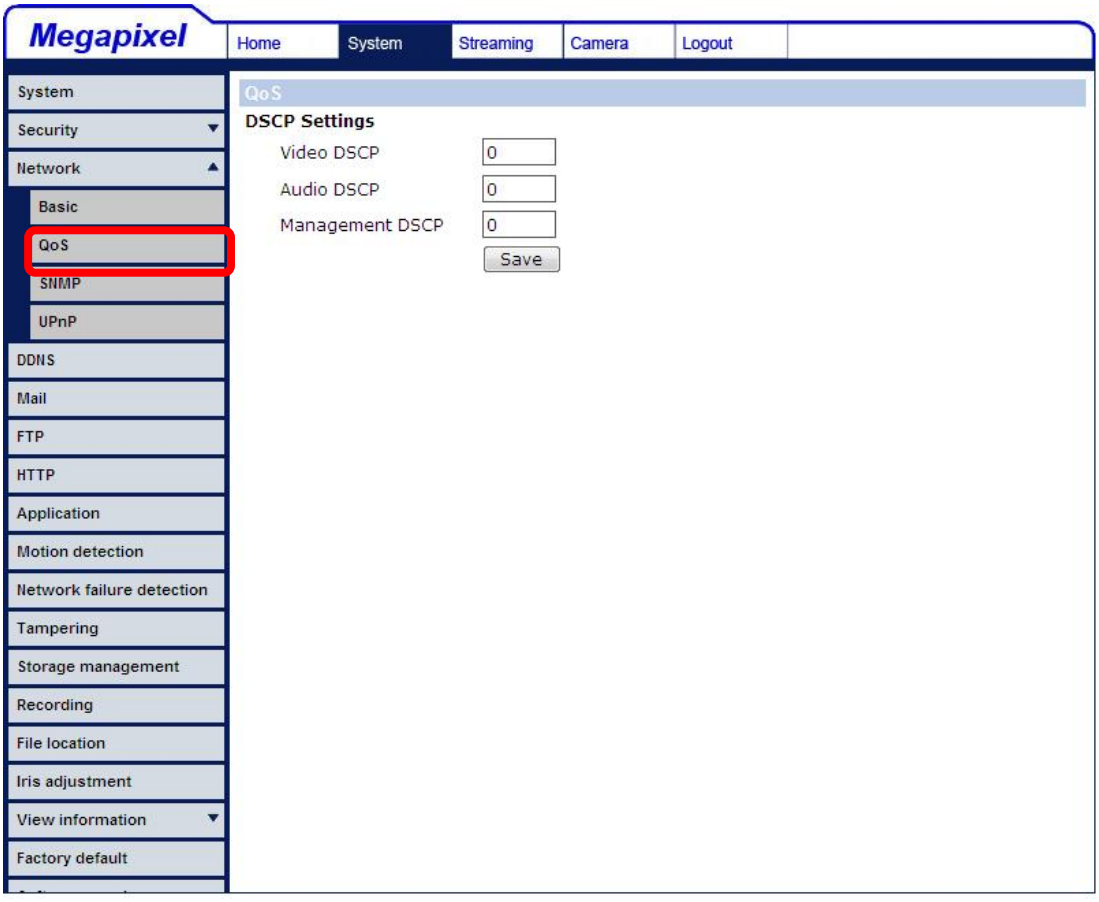

DSCP Settings

The DSCP value range is from 0 to 63. The default DSCP value is 0, which means DSCP disabled.

The IP Camera uses the following QoS Classes: Video, Audio and Management.

- **Video**
  The class consists of applications such as MJPEG over HTTP, RTP/RTSP and RTSP/HTTP.

- **Audio**
  This setting is only available for the IP Cameras that support audio.

- **Management**
  The class consists of HTTP traffic: Web browsing.

Click on the <Save> button when complete.

NOTE: To enable this function, please make sure the switches/routers in the network support QoS.

7.3.3.3 SNMP (Simple Network Management Protocol)

With Simple Network Management Protocol (SNMP) support, the IP Camera can be monitored and managed remotely by the network management system.

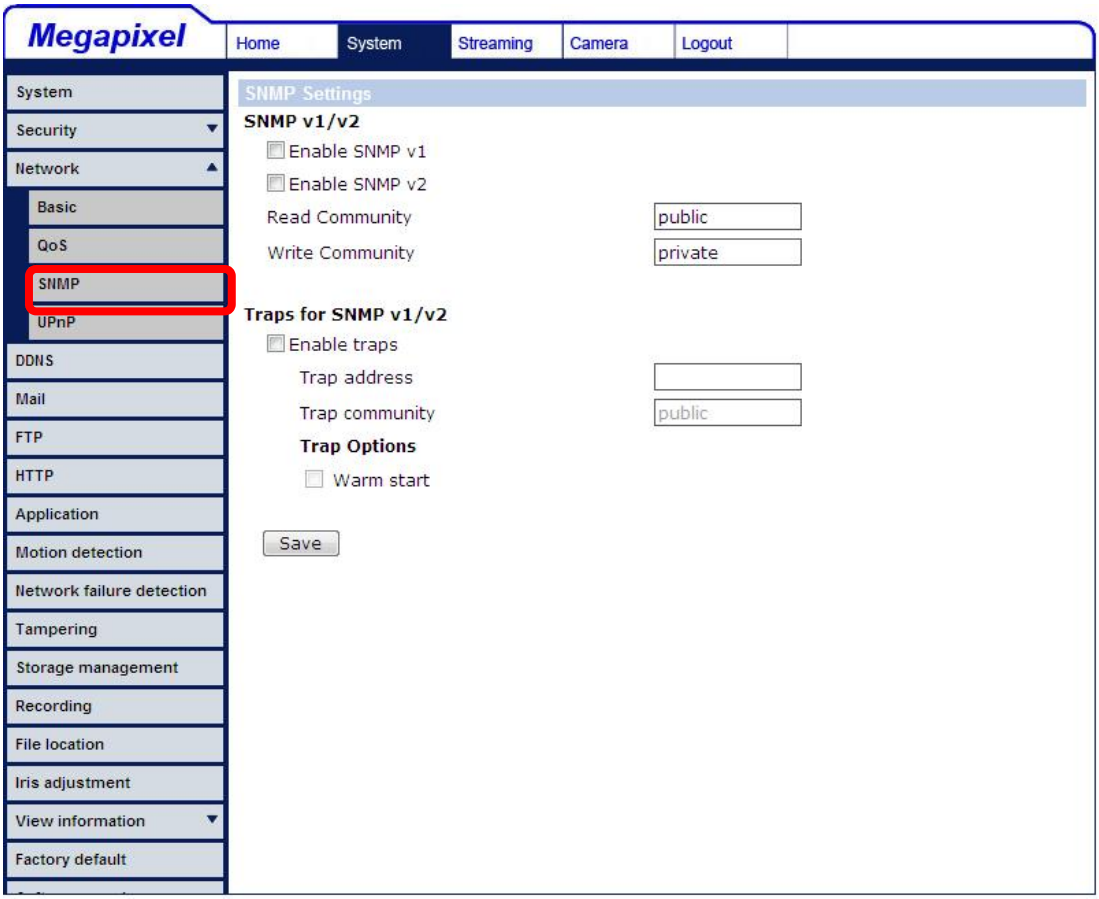

SNMP v1/ v2

- **Enable SNMP**
  Select the version of SNMP to use by checking the box.

- **Read Community**
  Specify the community name that has read-only access to all supported SNMP objects. The default value is <public>.

- **Write Community**
  Specify the community name that has read/write access to all supported SNMP objects (except read-only objects). The default value is <write>.

Traps for SNMP v1/ v2

Traps are used by the IP Camera to send massages to a management system for important events or status changes.

- **Enable Traps**
  Check the box to activate trap reporting.

- **Trap address**
  Enter the IP address of the management server.

- **Trap community**
  Enter the community to use when sending a trap message to the management system.

Trap Option

- **Warm Start**
  A Warm Start SNMP trap signifies that the SNMP device, i.e. IP Camera, performs software reload.

Click on the <Save> button when complete.

7.3.3.4 UPnP

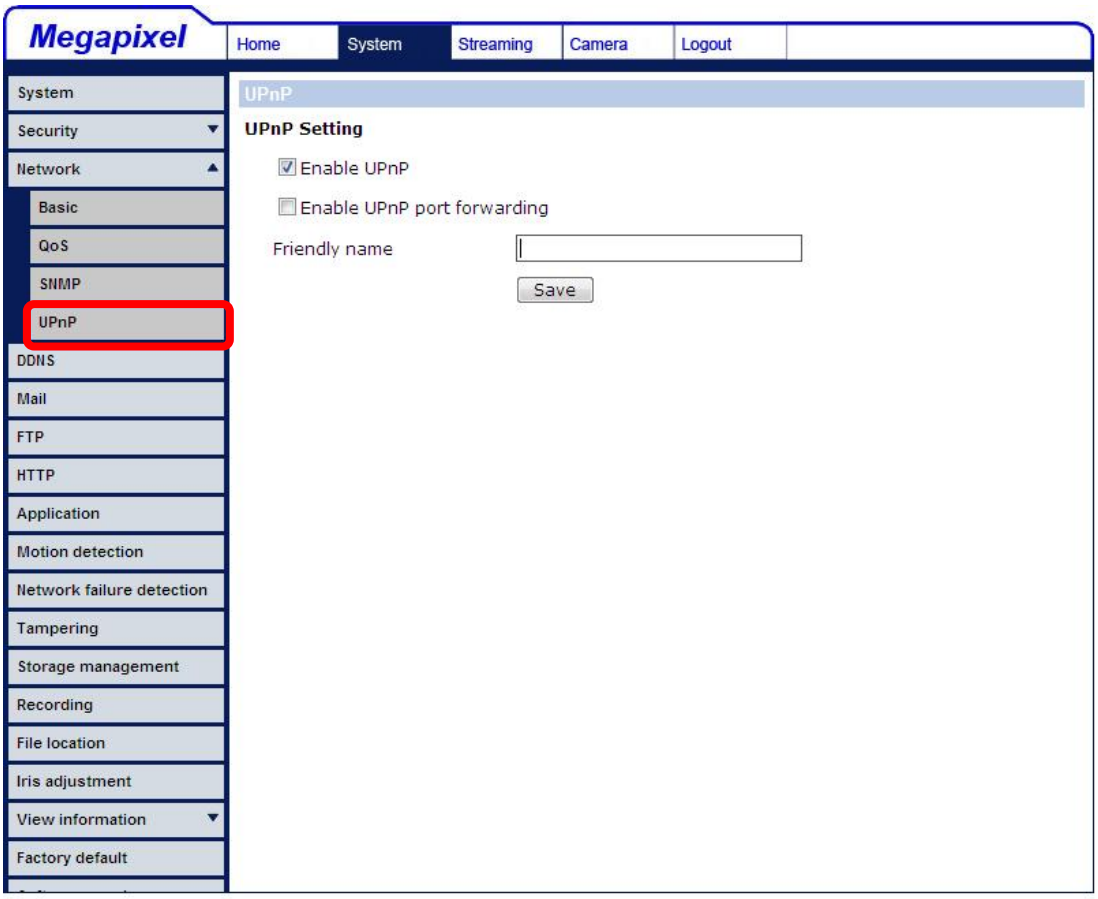

UPnP Setting

- **Enable UPnP**

  When the UPnP is enable, whenever the IP Camera is presented to the LAN, the icon of the connected IP Cameras will appear in My Network Places to allow for direct access as shown below.

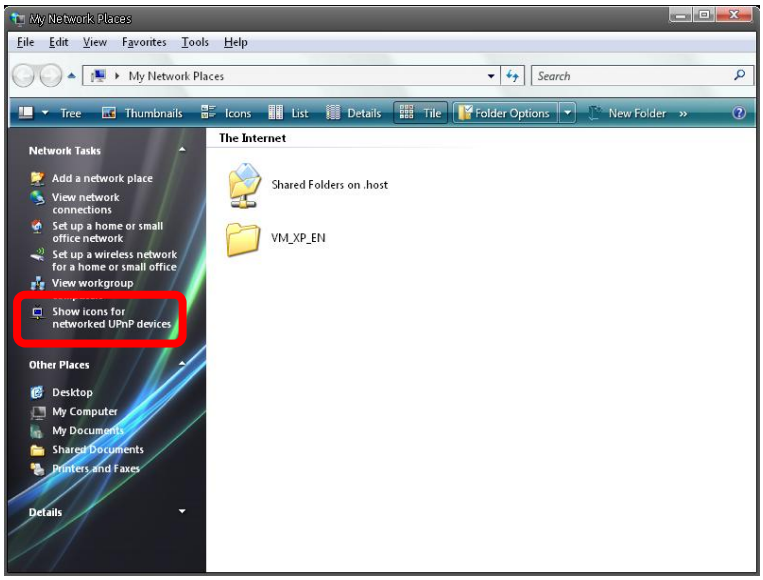

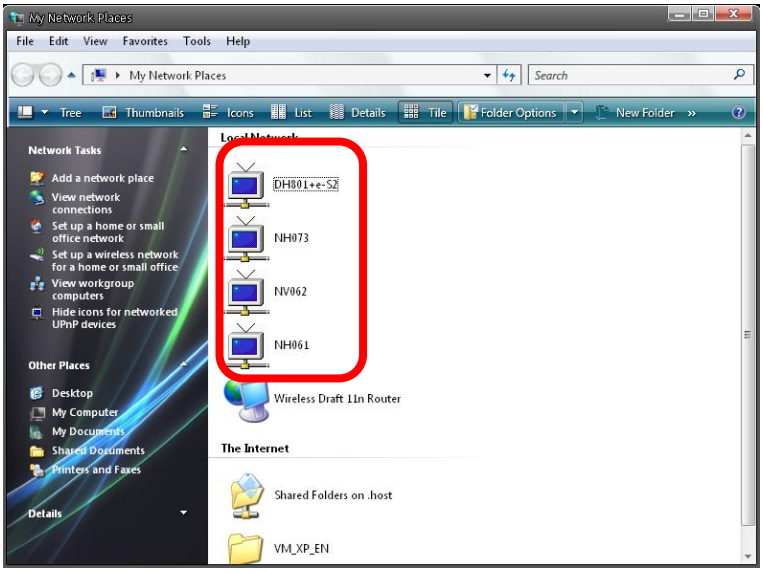

NOTE: To enable this function, please make sure the UPnP component is installed on your computer. Please refer to Appendix D: Install UPnP components for UPnP component installation procedure.

- **Enable UPnP port forwarding**

  When the UPnP port forwarding is enabled, the IP Camera is allowed to open the web server port on the router automatically.

NOTE: To enable this function, please make sure that your router supports UPnP and it is activated

- **Friendly name**
  Set the name for the IP Camera for identity.

7.3.4 DDNS

Dynamic Domain Name System (DDNS) allows a host name to be constantly synchronized with a dynamic IP address. In other words, it allows those using a dynamic IP address to be associated to a static domain name so others can connect to it by name.

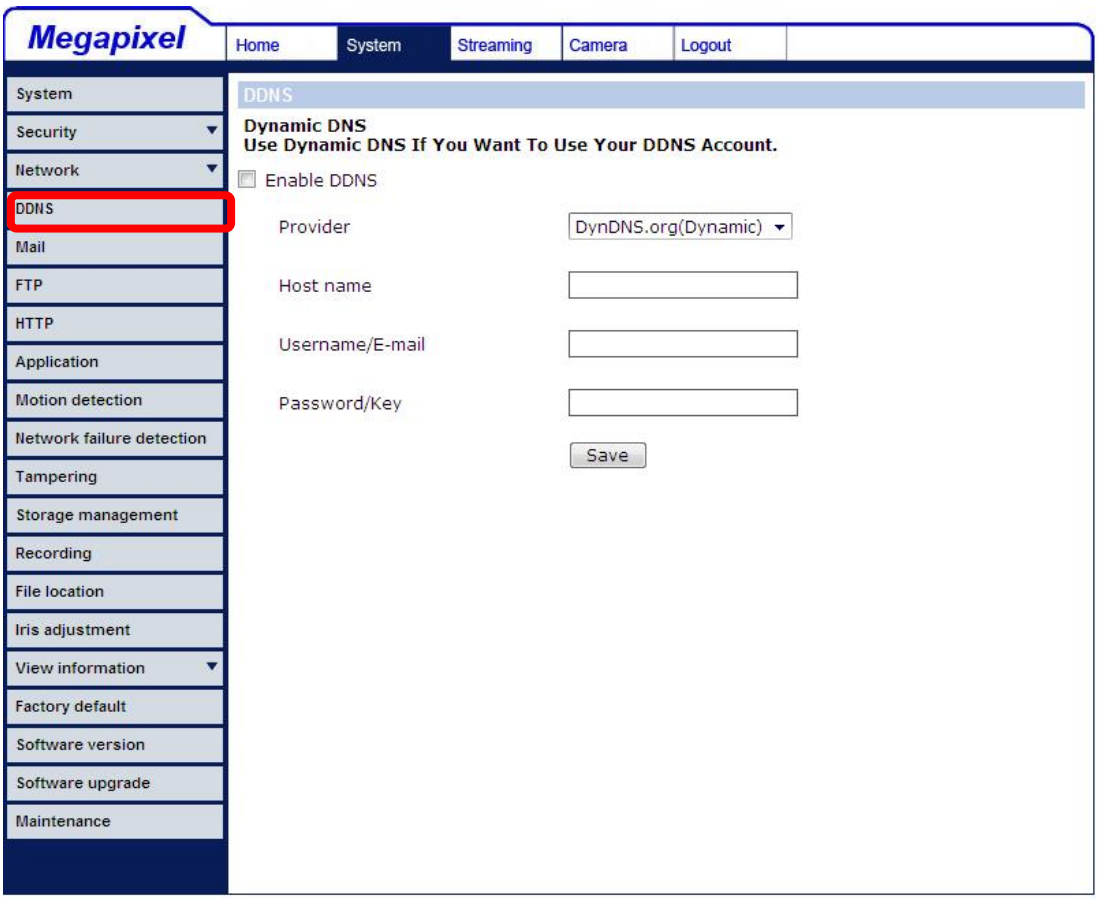

Enable DDNS

Check the item to enable DDNS.

Provider

Select one DDNS host from the provider list.

Host name

Enter the registered domain name in the field.

Username/E-mail

Enter the username or e-mail required by the DDNS provider for authentication.

Password/Key

Enter the password or key required by the DDNS provider for authentication.

7.3.5 Mail

The Administrator can send an e-mail via Simple Mail Transfer Protocol (SMTP) when an alarm is triggered. SMTP is a protocol for sending e-mail messages between servers. SMTP is a relatively simple, text-based protocol, where one or more recipients of a message are specified and the message text is transferred. The configuration page is shown as follows:

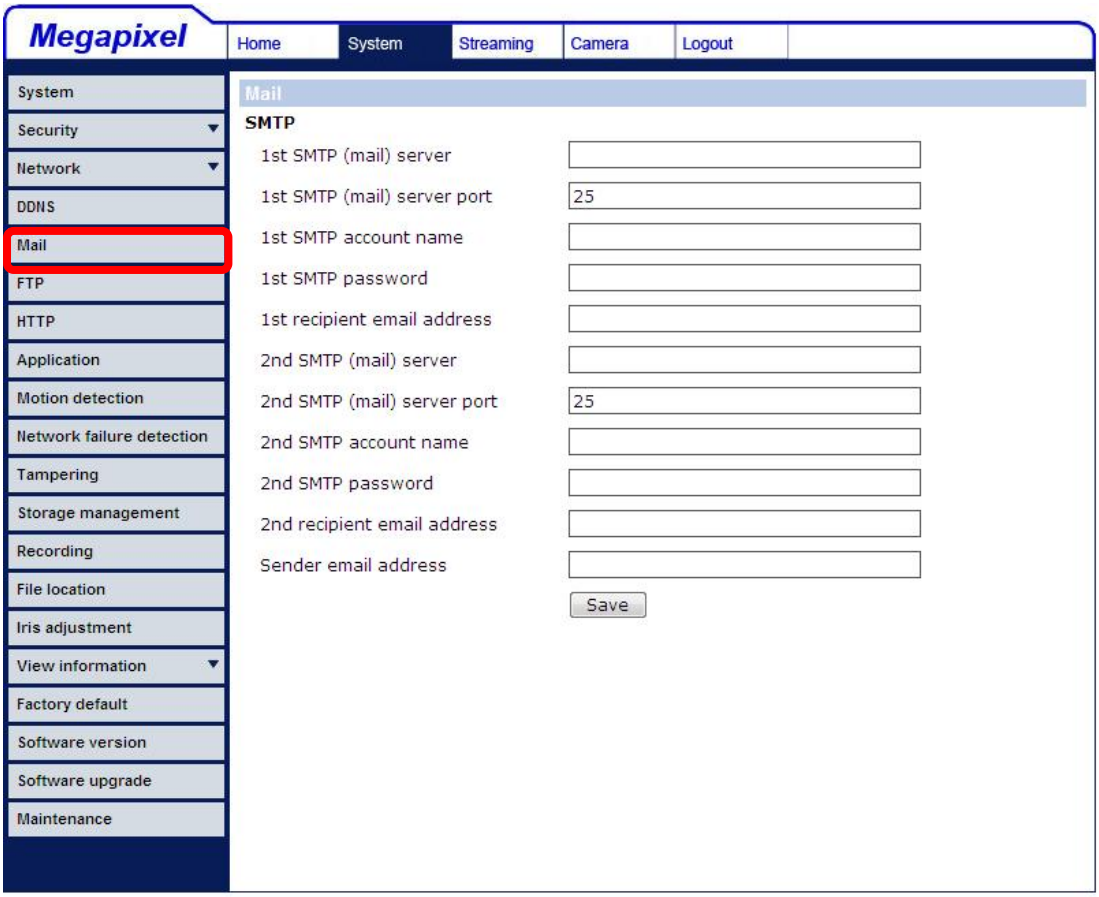

Two sets of SMTP can be configured. Each set includes SMTP Server, Account Name, Password and E-mail Address settings. For SMTP server, contact your network service provider for more specific information.

7.3.6 FTP

The Administrator can set as sending alarm message to a specific File Transfer Protocol (FTP) site when an alarm is triggered. Users can assign alarm message to up to two FTP sites. The FTP setting page is shown below. Enter the FTP details, which include server, server port, user name, password and remote folder, in the fields. Click on <Save> when finished.

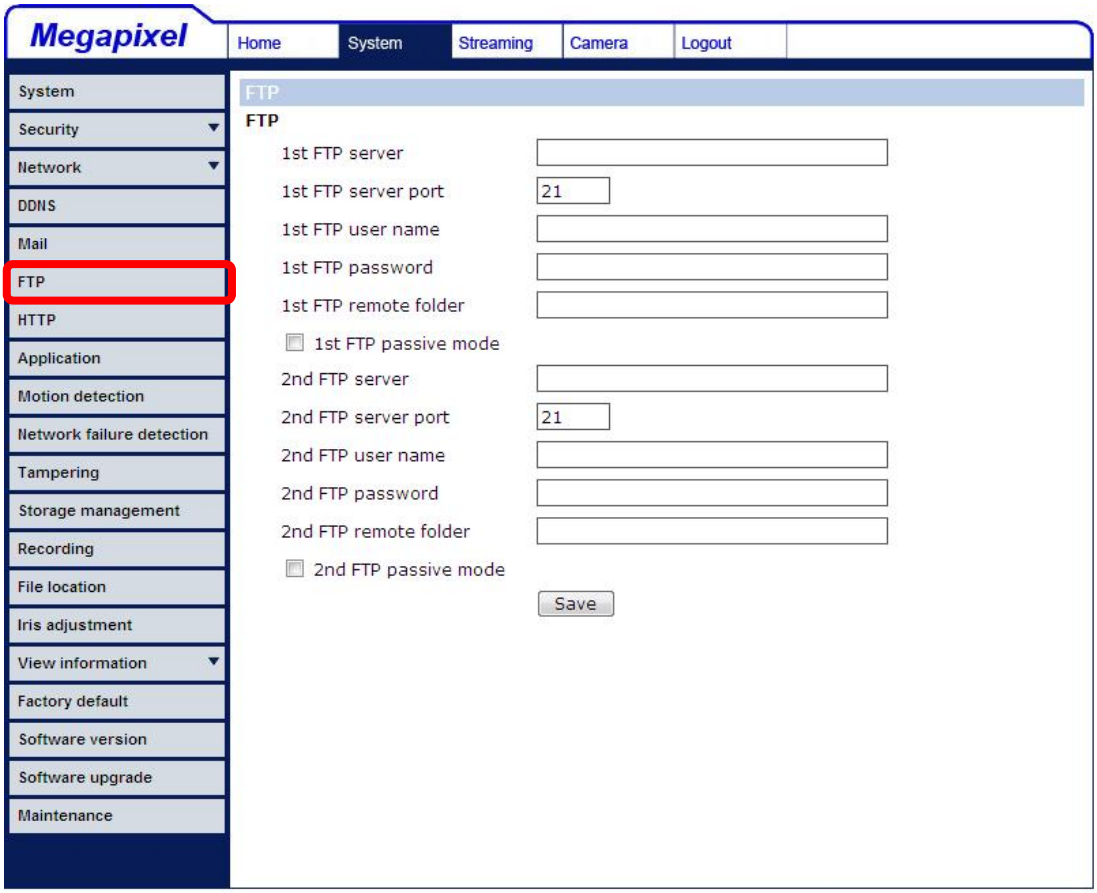

7.3.7 HTTP

A HTTP Notification server can listen for notification messages from IP Cameras by triggered events. The HTTP setting page is shown below. Enter the HTTP details, which include server name (for instance, http://192.168.0.1/admin.php), user name, and password in the fields. <Alarm> triggered and <Motion Detection> notifications can be sent to the specified <HTTP> server.

Click on <Save> when finished.

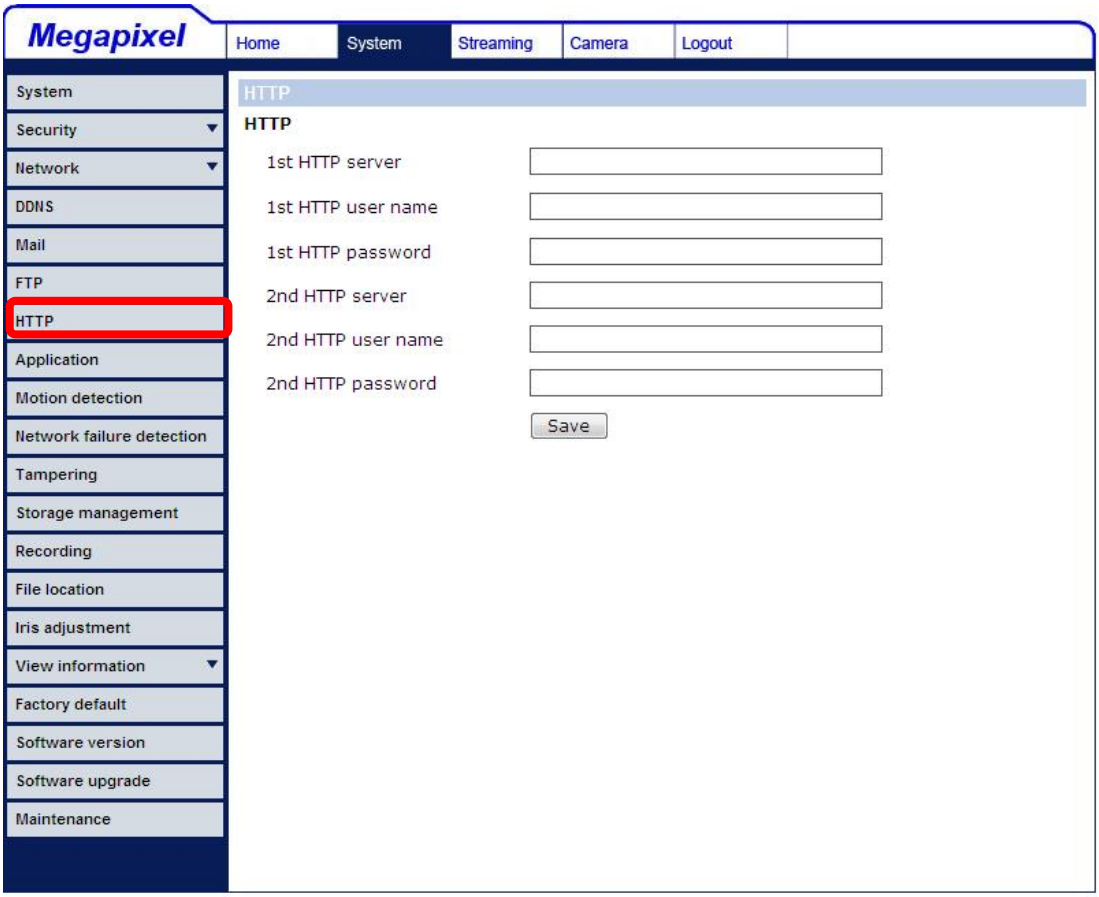

Please refer to: 7.3.8 Application: Send HTTP notification/ 7.3.9 Motion Detection for HTTP Notification settings.

7.3.8 Application

The IP Camera equips one alarm input and one relay output for cooperating with alarm system to catch events' images. Refer to 2.2 Camera Connectors to connect alarm devices to the IP Camera if needed. The alarm configuration page is also shown below.

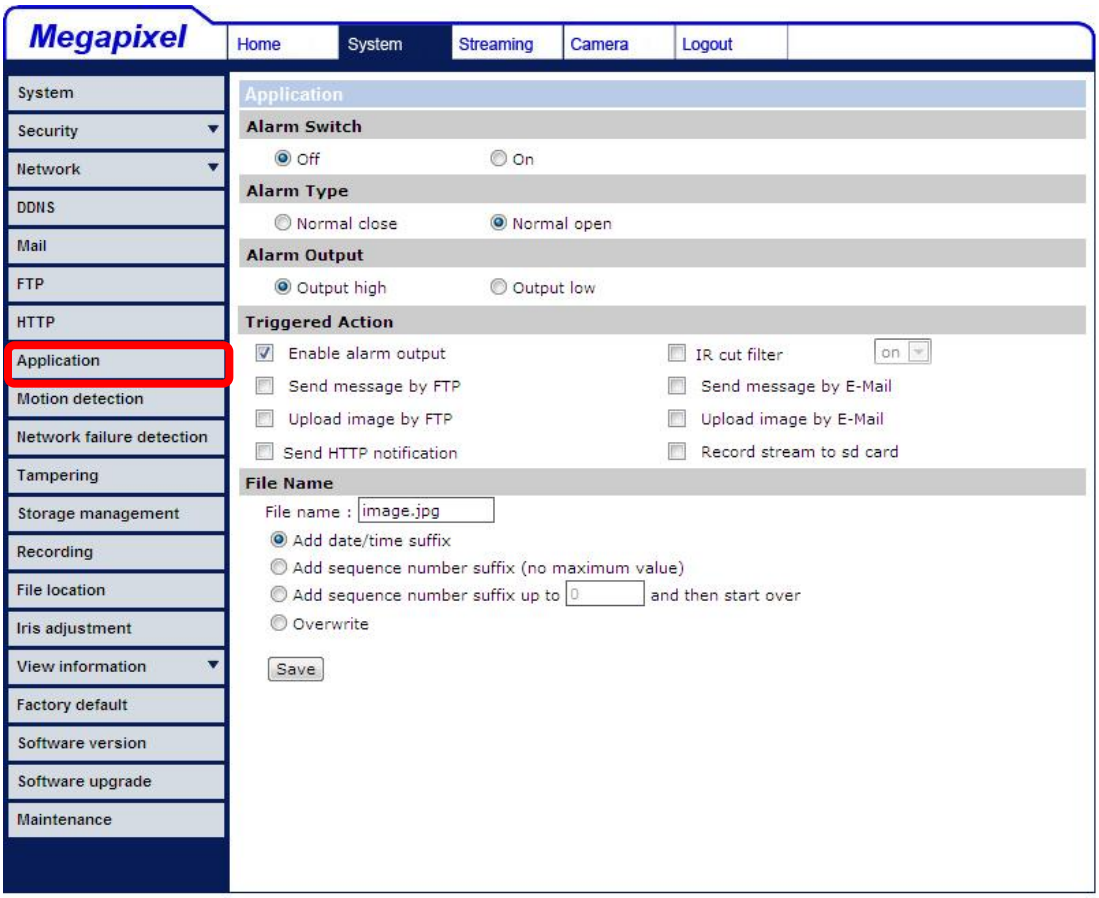

Alarm Switch

The Administrator can enable or disable the alarm function.

Alarm Type

Select an alarm type, <Normal close> or <Normal open>, that corresponds with the alarm application.

Alarm Output

Define alarm output signal <high> or <low> as the normal alarm output status according to the current alarm application.

Triggered Action (Multi-option)

The Administrator can specify alarm actions that will take when the alarm is triggered. All options are listed as follows:

- **Enable Alarm Output**
  Select the item to enable alarm relay output.

- **IR Cut Filter**
  Select the item and the camera's IR cut filter (ICR) will be removed (on) or blocked (off) when alarm input is triggered.

  Note: The IR Function (Refer to 7.5.8 IR Function) could not be set as <Auto> mode if this triggered action is enabled.

- **Send Alarm Message by FTP/E-Mail**
  The Administrator can select whether to send an alarm message by FTP and/or E-Mail when an alarm is triggered.

- **Upload Image by FTP**
  Select this item and the Administrator can assign a FTP site and configure various parameters as shown in the figure below. When the alarm is triggered, event images will be uploaded to the appointed FTP site.

  <Pre-trigger buffer> function allows users to check what happened to cause the trigger. The <Pre-trigger buffer> frame rate could be pre-determined.

  On the other hand, <Post-trigger buffer> is for users to upload certain amount of images after the alarm input is triggered.

  Check the box <Continue image upload> to upload the triggered images during certain time or keep uploading until the trigger is off. Select <Upload for __sec> and enter the duration in the blank. The images of the duration will be uploaded to FTP when the alarm input is triggered. The setting range is from 1 to 9999 seconds. Select <Upload during the trigger active> to make the images keep being uploaded to FTP during the trigger active until the alarm is released. Set the Image frequency as the upload frame rate. The setting range is from 1 frame to 15 frames.

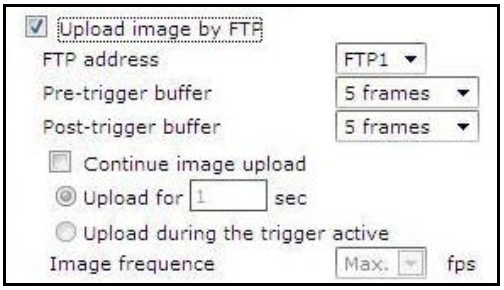

NOTE: Make sure FTP configuration has been completed. Refer to 7.3.6 FTP for further details.

- **Record Stream to SD Card**

  Select the item and the alarm-triggered recording will be saved into your Micro SD card.

  Pre-trigger buffer recording function allows users to check what happened to cause the trigger. The pre-trigger buffer time range is from 1 to 3 seconds. Select <Upload for __ sec> to set the recording duration after alarm is triggered. The setting range is from 1 to 99999 seconds. Select <Upload during the trigger active> to record the triggered video until the trigger is off.

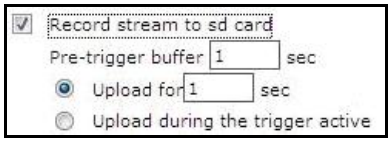

NOTE: Please make sure the local recording (with Micro SD/ SDHC card) is activated so that this function can be implemented. Refer to 7.3.13 Recording for further details.

- **Upload Image by E-Mail**

  Select this item and the Administrator can assign an e-mail address and configure various parameters as shown in the figure below. When the alarm is triggered, event images will be sent to the appointed e-mail address.

  <Pre-trigger buffer> function allows users to check what happened to cause the trigger. The <Pre-trigger buffer> frame rate could be pre-determined.

On the other hand, <Post-trigger buffer> is for users to upload certain amount of images after alarm input is triggered.

Check the box <Continue image upload> to upload the triggered images during certain time or keep uploading until the trigger is off. Select <Upload for __sec> and enter the duration in the blank. The images of the duration will be uploading by E-mail when the alarm input is triggered. The setting range is from 1 to 9999 seconds. Select <Upload during the trigger active> to make the images keep being uploaded to E-mail during the trigger active until the alarm is released. Set the Image frequency as the upload frame rate. The setting range is from 1 frame to 15 frames.

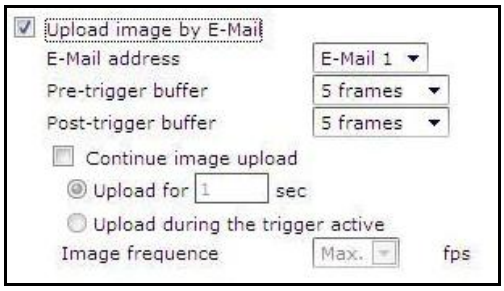

NOTE: Make sure SMTP configuration has been completed. Refer to 7.3.5 Mail for further details.

- **Send HTTP notification**

  Check this item, select the destination HTTP address, and specify the parameters for event notifications by <Alarm> triggered. When an alarm is triggered, the notification can be sent to the specified HTTP server.

  For instance, if the custom parameter is set as “action=1&group=2”, and the HTTP server name is “http://192.168.0.1/admin.php”, the notification will be sent to HTTP server as “http://192.168.0.1/admin.php?action=1&group=2” when alarm is triggered.

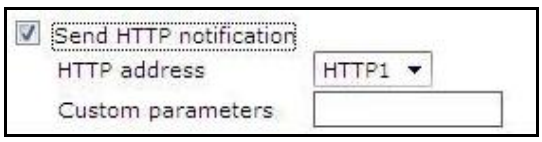

File Name

Enter a file name in the blank, ex. image.jpg. The uploaded image's file name format can be set in this section. Please select the one that meets your requirements.

- **Add date/time suffix**
  File name: imageYYMMDD_HHNNSS_XX.jpg
  Y: Year, M: Month, D: Day
  H: Hour, N: Minute, S: Second
  X: Sequence Number

- **Add sequence number suffix (no maximum value)**
  File name: imageXXXXXXX.jpg
  X: Sequence Number

- **Add sequence number suffix (limited value)**
  File Name: imageXX.jpg
  X: Sequence Number
  The file name suffix will end at the number being set. For example, if the setting is up to "10", the file name will start from 00, end at 10, and then start all over again.

- **Overwrite**
  The original image in the FTP site will be overwritten by the new uploaded file with a static filename.

Save

After complete all the settings mentions above, please click on the Save button to save all the settings in this page.

7.3.9 Motion Detection

Motion Detection function allows detecting suspicious motion and triggering alarms when motion volume in the detected area reaches/exceeds the determined sensitivity threshold value.

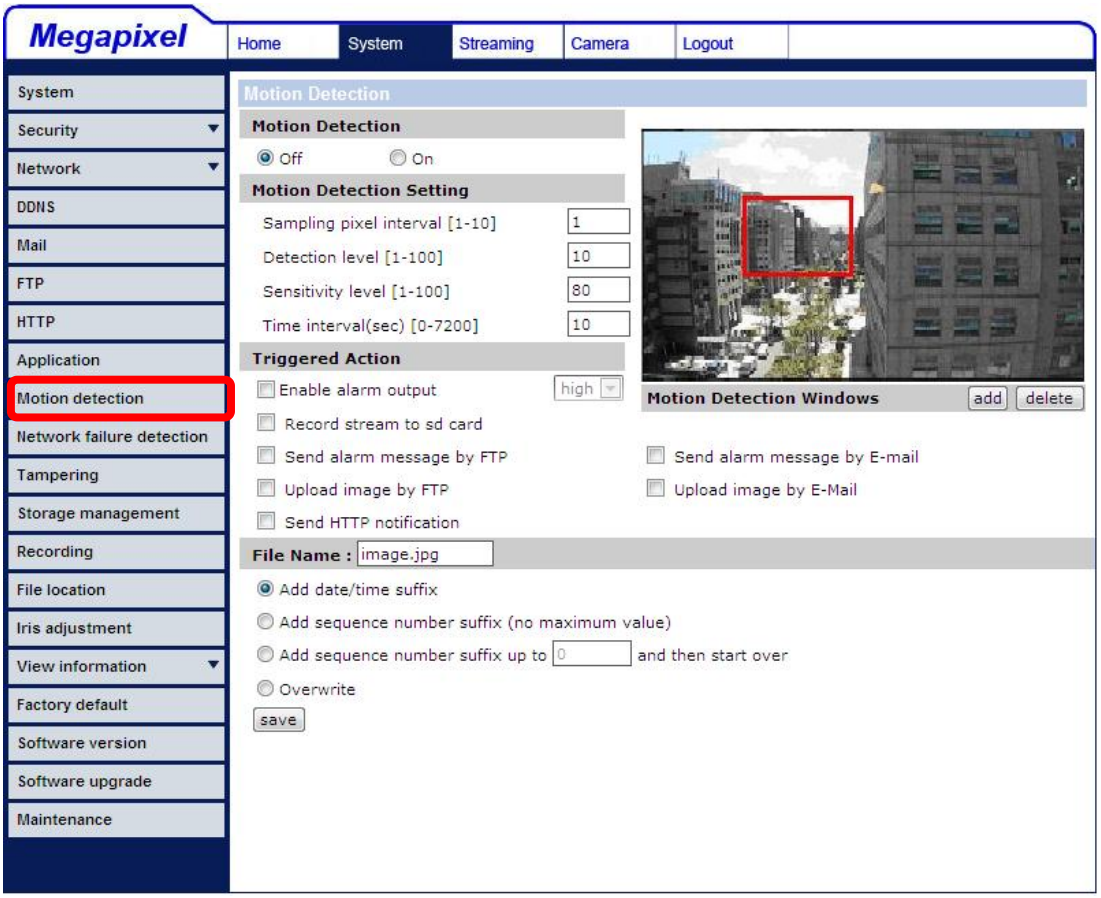

In the Motion Detection setting page, there is a frame (**Motion Detection Window**) displayed on the Live Video Pane. The Motion Detection Window is for defining the motion detection area. To change the size of the Motion Detection Window, move the mouse cursor to the edge of the frame and draw it outward/inward. Moving the mouse to the center of the frame can shift the frame to the intended location.

Up 10 Motion Detection Windows can be set. Click on the <add> button under the Live Video Pane to add a Motion Detection Window. To cancel a Motion Detection Window, move the mouse cursor to the selected Window, and click on the <delete> button.

If Motion Detection function is activated, the pop-off window (Motion) with indication of motion will be shown.

When motion is detected, the signals will be displayed on the Motion window as shown below.

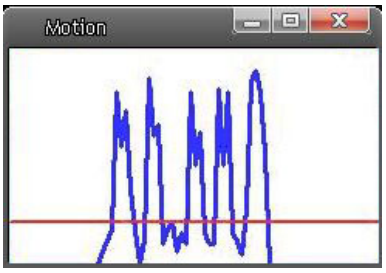

Detailed settings of Motion Detection are described as follows:

Motion Detection

You will be able to turn on/off Motion Detection in System section. Default setting is Off.

Motion Detection Setting

Users could adjust various parameters of Motion Detection in this section.

- **Sampling pixel interval [1-10]:**
  The default value is 1. If the value is set as 3, it means within the detection region, system will take one sampling pixel for every 3 pixels by each row and each column (refer to the figure below).

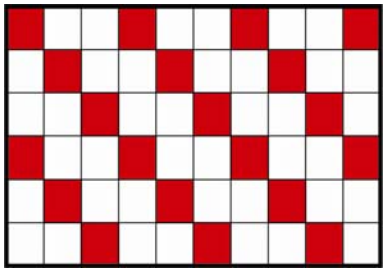

- **Detection level [1-100]:**
  The default level is 10. The item is to set detection level for each sampling pixel; the smaller the value, the more sensitive it is.

- **Sensitivity level [1-100]:**
  The default level is 80, which means if 20% or more sampling pixels are detected differently, system will detect motion. The bigger the value, the more sensitive it is. Meanwhile, when the value is bigger, the red horizontal line in the motion indication window will be lower accordingly.

- **Time interval (sec) [0-7200]:**
  The default interval is 10. The value is the interval between each detected motion.

Triggered Action (Multi-option)

The Administrator can specify alarm actions that will take when motion is detected. All options are listed as follows:

- **Enable Alarm Output**
  Check the item and select the predefined type of alarm output to enable alarm relay output when motion is detected.

- **Record stream to SD Card**
  Select this item and the Motion Detection recording will be stored in Micro SD/ SDHC card when motion is detected.

  Pre-trigger buffer recording function allows users to check what happened to cause the trigger. The pre-trigger buffer time range is from 1 to 3 seconds. Select <Upload for __ sec> to set the recording duration after motion is triggered. The setting range is from 1 to 99999 seconds. Select <Upload during the trigger active> to record the triggered video until the trigger is off.

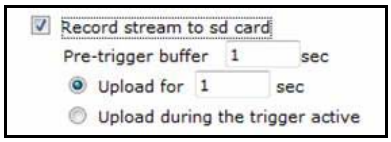

NOTE: Please make sure the local recording (with Micro SD/ SDHC card) is activated so that this function can be implemented. Refer to 7.3.13 Recording for further details.

- **Send Alarm Message by FTP/E-Mail**
  The Administrator can select whether to send an alarm message by FTP and/or E-Mail when motion is detected.

- **Upload Image by FTP**
  Select this item and the Administrator can assign a FTP site and configure various parameters as shown in the figure below. When motion is detected, event images will be uploaded to the appointed FTP site.

  <Pre-trigger buffer> function allows users to check what happened to cause the trigger. The <Pre-trigger buffer> frame rate could be pre-determined.

  On the other hand, <Post-trigger buffer> is for users to upload certain amount of images after motion event occurs.

  Check the box <Continue image upload> to upload the triggered images during certain time or keep uploading until the trigger is off. Select <Upload for __sec> and enter the duration in the blank. The images of the duration will be uploaded to FTP when the motion event occurs. The setting range is from 1 to 9999 seconds. Select <Upload during the trigger active> to make the images keep being uploaded to FTP during the trigger active until the event stops. Set the Image frequency as the upload frame rate. The setting range is from 1 frame to 15 frames.

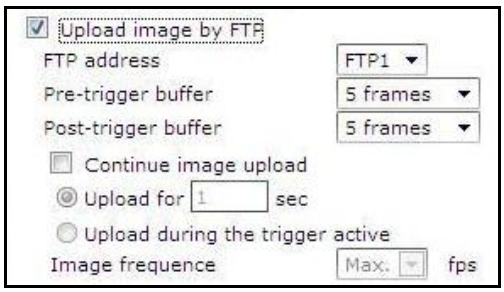

NOTE: Make sure FTP configuration has been completed. Refer to 7.3.6 FTP for further details.

- **Upload Image by E-Mail**
  Select this item and the Administrator can assign an e-mail address and configure various parameters as shown in the figure below. When motion is detected, event images will be sent to the appointed e-mail address.

  Pre-trigger buffer> function allows users to check what happened to cause the trigger. The <Pre-trigger buffer> frame rate could be pre-determined.

  On the other hand, <Post-trigger buffer> is for users to upload certain amount of images after the motion event occurs.

  Check the box <Continue image upload> to upload the triggered images during certain time or keep uploading until the trigger is off. Select <Upload for __sec> and enter the duration in the blank. The images of the duration will be uploading by E-mail when the motion event occurs. The setting range is from 1 to 9999 seconds. Select <Upload during the trigger active> to make the images keep being uploaded to E-mail during the trigger active until the event stops. Set the Image frequency as the upload frame rate. The setting range is from 1 frame to 15 frames.

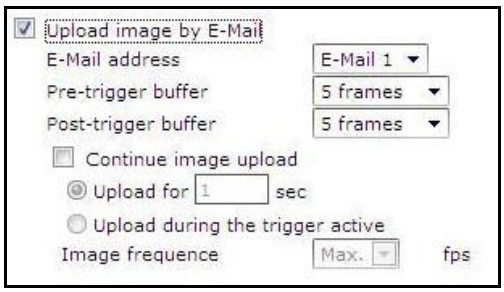

NOTE: Make sure SMTP configuration has been completed. Refer to 7.3.5 Mail for further details.

- **Send HTTP notification**
  Check this item, select the destination HTTP address, and specify the parameters for event notifications by <Motion Detection> triggered. When an alarm is triggered, the notification can be sent to the specified HTTP server.

For instance, if the custom parameter is set as “action=1&group=2”, and the HTTP server name is “http://192.168.0.1/admin.php”, the notification will be sent to HTTP server as “http://192.168.0.1/admin.php?action=1&group=2” when alarm is triggered.



File Name

The uploaded image’s filename format can be set in this section. Please select the one that meets your requirements.

Save

Click on the <Save> button to save all the Motion Detection settings mentioned above.

7.3.10 Network Failure Detection

Network Failure Detection allows the IP Camera to ping another IP device (e.g. NVR, VSS, Video Server, etc.) within the network periodically and generates some actions in case of network failure occurs, for instance, a Video Server is somehow disconnected.

Being capable of implementing local recording (through Micro SD card) when network failure happens, the IP Camera could be a backup recording device for the surveillance system.

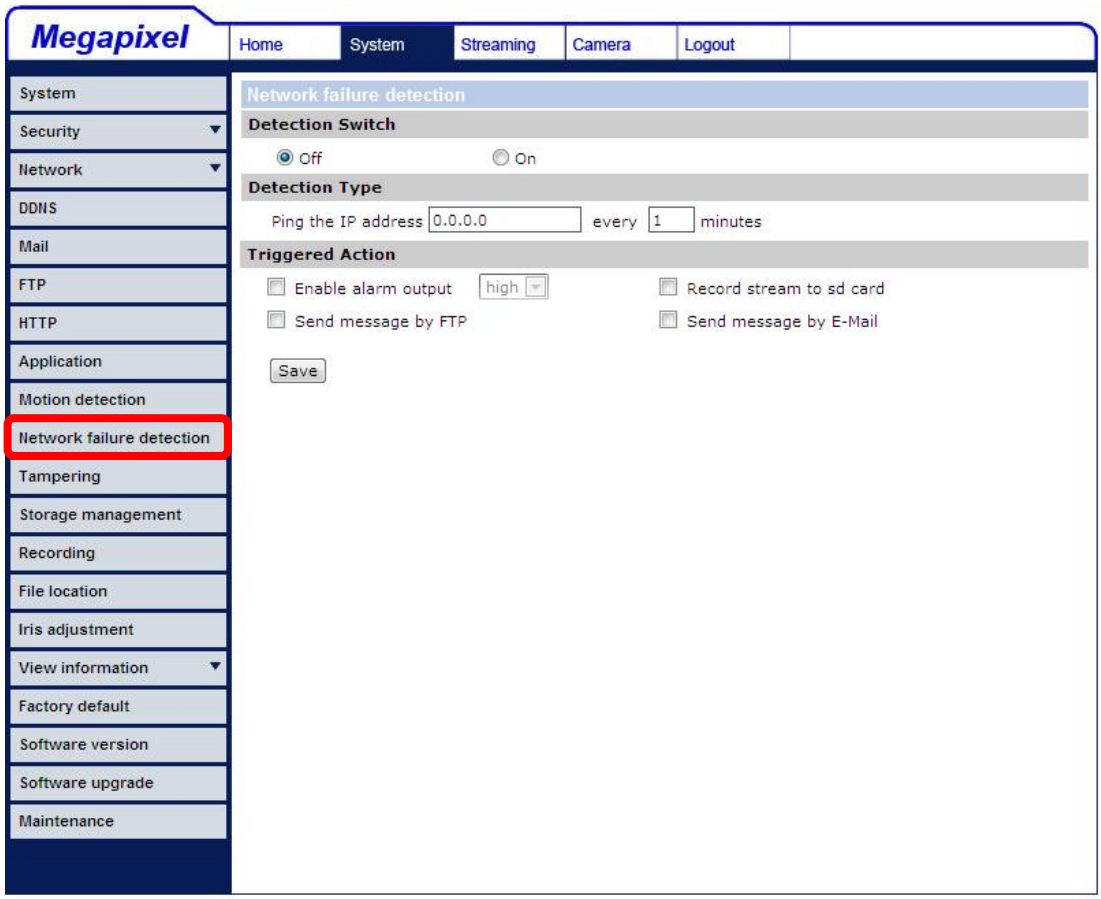

Detection Switch

You will be able to turn on/off Network Failure Detection in System section. Default setting is Off.

Detection Type

Input the IP device address and the period of ping time to ping. The ping time setting range is from 1 to 99 minutes.

Triggered Action (Multi-option)

The Administrator can specify alarm actions that will take when network failure is detected. All options are listed as follows:

- **Enable Alarm Output**
  Select the item to enable alarm relay output.

- **Record Stream to SD Card**
  Select the item and the alarm-triggered recording will be saved into your Micro SD card.

  Pre-trigger buffer recording function allows users to check what happened to cause the trigger. The pre-trigger buffer time range is from 1 to 3 seconds. Select <Upload for __ sec> to set the recording duration after alarm is triggered. The setting range is from 1 to 99999 seconds. Select <Upload during the trigger active> to record the triggered video until the trigger is off.

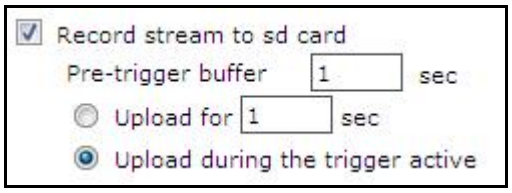

NOTE: Please make sure the local recording (with Micro SD/ SDHC card) is activated so that this function can be implemented. Refer to 6.3.13 Recording for further details.

- **Send Alarm Message by FTP/E-Mail**
  The Administrator can select whether to send an alarm message by FTP and/or E-Mail when an alarm is triggered.

Save

Click on the <Save> button to save all the settings mentioned above.

7.3.11 Tampering

Tempering Alarm function helps the IP Camera against tampering such as deliberate redirection, blocking, paint spray, and lens cover, etc through video analysis and reaction to such events by sending out notifications or uploading snapshots to the specified destination(s).

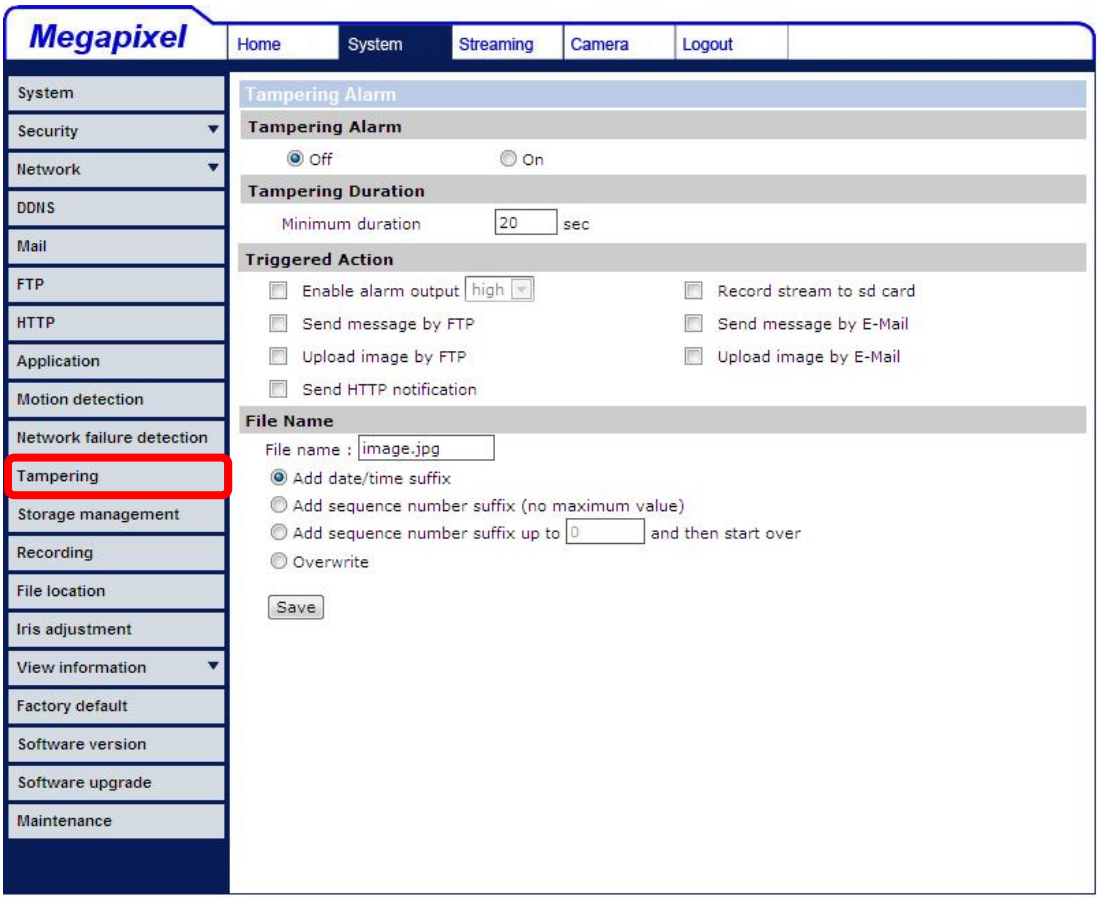

Detection of camera tampering is achieved by measuring the differences between the older frames of video (which are stored in buffers) and more recent frames.

Tampering Alarm

You will be able to turn on/off Tampering Alarm function in Tampering Alarm setting page. The default setting is Off.

Tampering Duration

Minimum Tampering Duration is the time for video analysis to determine whether camera tampering has occurred. Minimum Duration could also be interpreted as defining the Tampering threshold; longer duration represents

higher threshold. Settable Tampering Duration time range is from 10 to 3600 seconds. The Default value is 20 seconds.

Triggered Action (Multi-option)

The Administrator can specify alarm actions that will take when tampering is detected. All options are listed as follows:

- **Enable Alarm Output**
  Check the item and select the predefined type of alarm output to enable alarm relay output when tampering is detected.

- **Record stream to SD Card**
  Select this item and the Tampering Alarm recording will be stored in Micro SD/ SDHC card when tampering is detected.

  Pre-trigger buffer recording function allows users to check what happened to cause the trigger. The pre-trigger buffer time range is from 1 to 3 seconds. Select <Upload for __ sec> to set the recording duration after tampering is triggered. The setting range is from 1 to 99999 seconds. Select <Upload during the trigger active> to record the triggered video until the trigger is off.

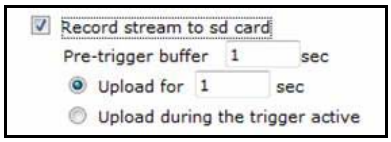

NOTE: Please make sure the local recording (with Micro SD/ SDHC card) is activated so that this function can be implemented. Refer to 7.3.13 Recording for further details.

- **Send Alarm Message by FTP/E-Mail**
  The Administrator can select whether to send an alarm message by FTP and/or E-Mail when tampering is detected.

- **Upload Image by FTP**
  Select this item and the Administrator can assign a FTP site and configure various parameters as shown in the figure below. When tampering is detected, event images will be uploaded to the appointed FTP site.

<Pre-trigger buffer> function allows users to check what happened to cause the trigger. The <Pre-trigger buffer> frame rate could be pre-determined.

On the other hand, <Post-trigger buffer> is for users to upload certain amount of images after tampering is triggered.

Check the box <Continue image upload> to upload the triggered images during certain time or keep uploading until the trigger is off. Select <Upload for __sec> and enter the duration in the blank. The images of the duration will be uploaded to FTP when tampering is triggered. The setting range is from 1 to 9999 seconds. Select <Upload during the trigger active> to make the images keep being upload to FTP during the trigger active until the tampering stops. Set the Image frequency as the upload frame rate. The setting range is from 1 frame to 15 frames.

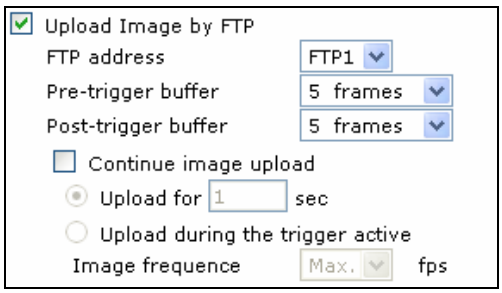

NOTE: Make sure FTP configuration has been completed. Refer to 7.3.6 FTP for further details.

- **Upload Image by E-Mail**
  Select this item and the Administrator can assign an e-mail address and configure various parameters as shown in the figure below. When tampering is detected, event images will be sent to the appointed e-mail address.

  <Pre-trigger buffer> function allows users to check what happened to cause the trigger. The <Pre-trigger buffer> frame rate could be pre-determined.

  On the other hand, <Post-trigger buffer> is for users to upload certain amount of images after tampering occurs.

Check the box <Continue image upload> to upload the triggered images during certain time or keep uploading until the trigger is off. Select <Upload for __sec> and enter the duration in the blank. The images of the duration will be uploading by E-mail when tampering is triggered. The setting range is from 1 to 9999 seconds. Select <Upload during the trigger active> to make the images keep being upload to E-mail during the trigger active until tampering stops. Set the Image frequency as the upload frame rate. The setting range is from 1 frame to 20 frames.

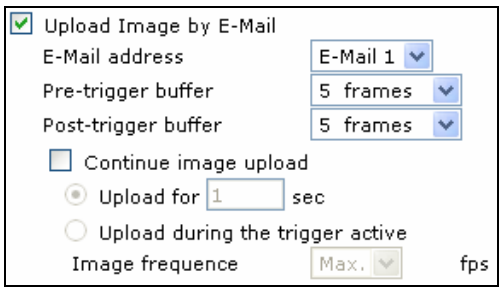

NOTE: Make sure SMTP configuration has been completed. Refer to 7.3.5 Mail for further details.

- **Send HTTP notification**

  Check this item, select the destination HTTP address, and specify the parameters for HTTP notifications. When the Tampering Alarm is triggered, the HTTP notifications can be sent to the specified HTTP server.

  For instance, if the custom parameter is set as "action=1&group=2", and the HTTP server name is "http://192.168.0.1/admin.php", the notification will be sent to HTTP server as "http://192.168.0.1/admin.php?action=1&group=2" when alarm is triggered.

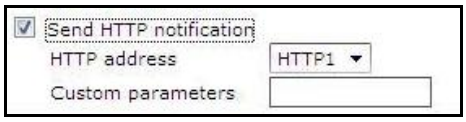

File Name

The uploaded image's filename format can be set in this section. Please select the one that meets your requirements.

Save

Click on the <Save> button to save all the Tampering Alarm settings mentioned above.

7.3.12 Storage Management

Users can implement local recording to the Micro SD/SDHC card up to 32GB. This page shows the capacity information of the Micro SD card and a recording list with all the recording files saved on the memory card. Users can also format the SD card and implement automatic recording cleanup through the setting page.

To implement Micro SD card recording, please go to the <Recording> page (refer to 7.3.13 Recording) for activation.

NOTE: Please format the Micro SD/SDHC card when using for the first time. Formatting will also be required when a memory card already being used on one camera and later transferred to another camera with different software platform.

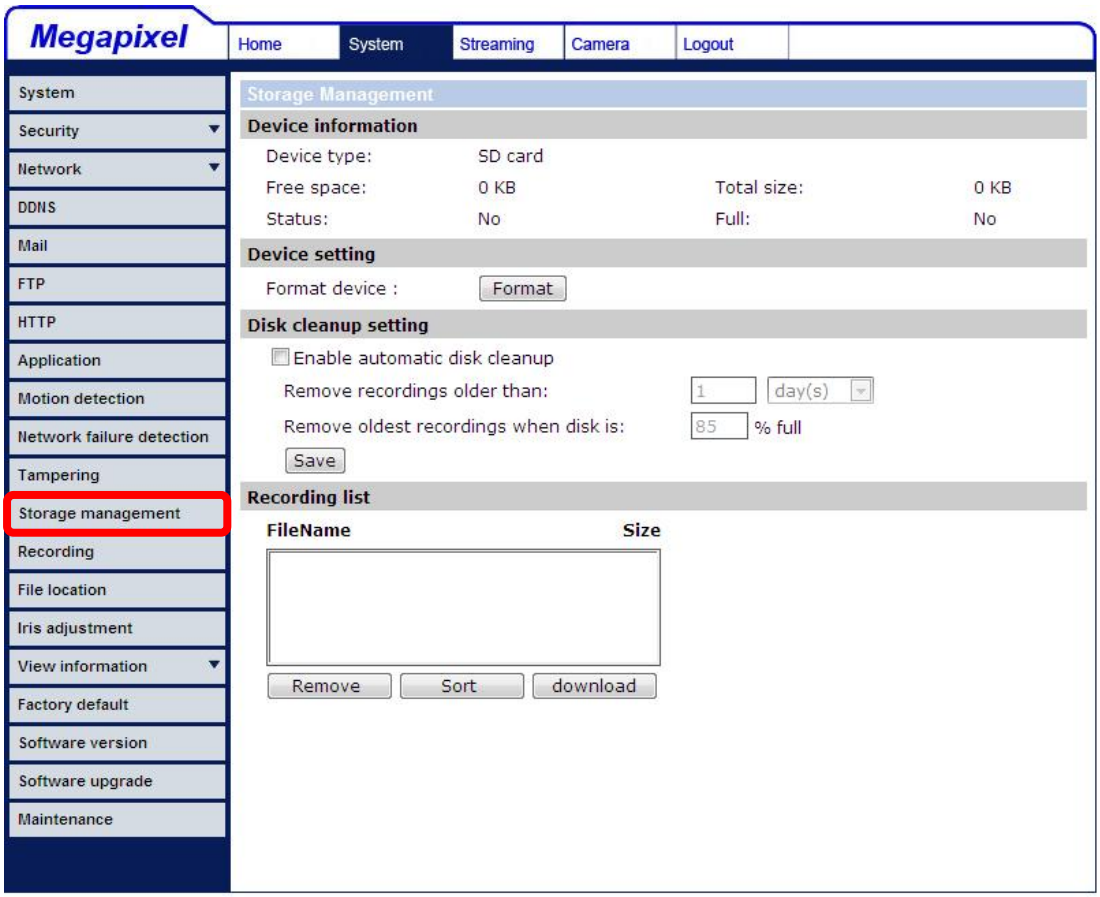

Device information

When users insert the Micro SD/SDHC card, the card information such as the memory capacity and status will be shown at Device Information section.

For the memory card being successfully installed, its status shall be shown at <Device information> section in the Storage Management page.

Device setting

Click on the <Format> button to format the memory card.

Disk cleanup setting

Users can enable automatic recordings cleanup by specifying the time and storage limits

Recording List

Each video file on the Micro SD/SDHC card will be listed in the Recording list as shown below. The maximum file size is 60 MB (60 MB per file).

When the recording mode is set as <Always> (consecutive recording) and the Micro SD/ SDHC card recording is also allowed to be enabled by events triggered, once events occur, the system will immediately implement events recording to the memory card. Then the IP Camera will return to the regular recording mode after events recording.

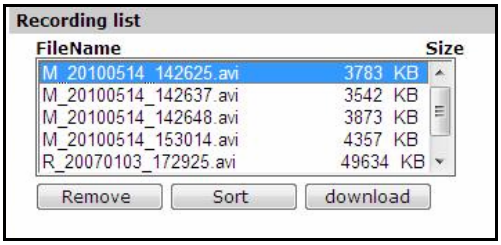

- **Remove**
  To remove a file, select the file first, and then click on the <Remove> button.

- **Sort**
  Click on the <Sort> button, and the files in the Recording list will be listed in name and date order.

NOTE: The capital letter A/M/R/T appears in the very beginning of name denotes the sort of the recording: A stands for Alarm; M stands for Motion; R stands for regular recording; and T stands for Tampering.

- **Download**

  To open/download a video clip, select the file first, and then click on the <download> button below the Recording list field. The selected file window will pop up as shown below. Click on t he AVI file to directly play the video in the player or download it to a specified location.

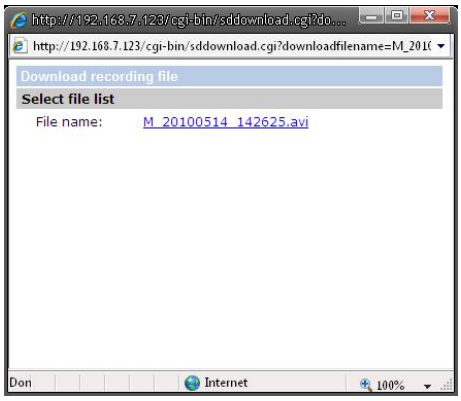

7.3.13 Recording

In the Recording setting page, users can specify the recording schedule that fits the present surveillance requirement.

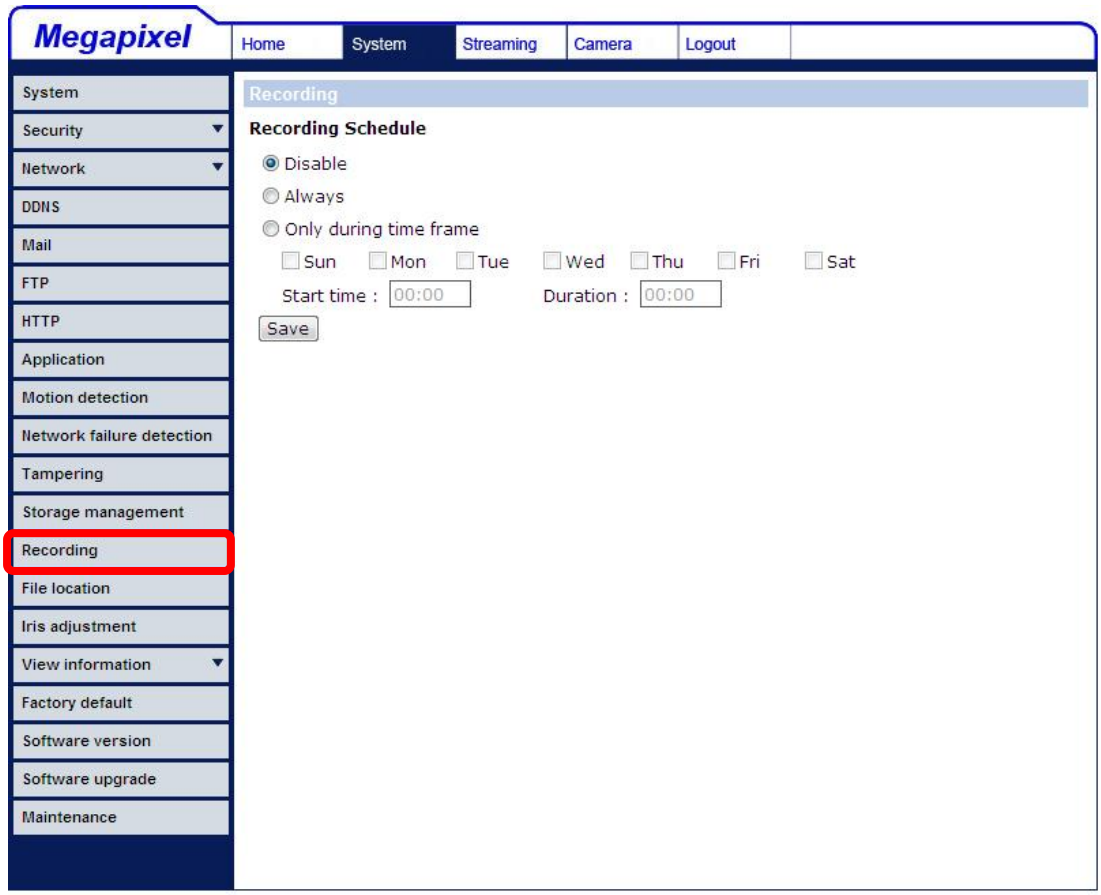

Activating Micro SD/SDHC Card Recording

Two types of schedule mode are offered: Always and Time Frame setting. Users can setup the time frame to fit the recording schedule or choose <Always> to activate Micro SD/SDHC Card Recording all the time.

Please click on the <Save> button for confirming the schedule mode.

Terminating Micro SD/SDHC Card Recording

Select <Disable> to terminate the recording function.

7.3.14 File Location

Users can specify a storage location for the snapshots and web recording. The default setting is: C:\. Once confirm the setting, click on <Save>, and all the snapshots and recording will be saved in the designate location.

NOTE: Please make sure the selected file path contains valid characters such as letters and numbers.

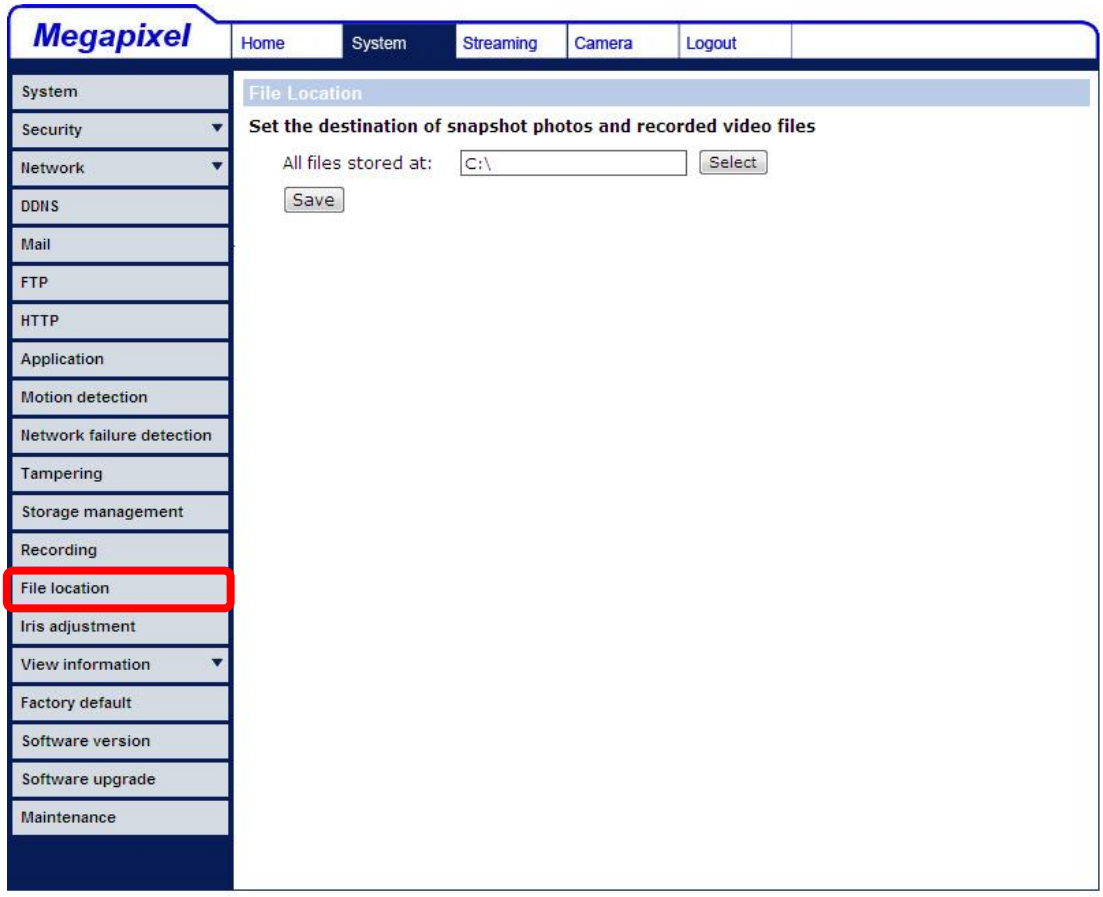

NOTE: For users with Windows 7 operating system, it is required to log on as an Administrator to implement the Snapshot and Web Recording function.

7.3.15 Iris Adjustment

For users who use Auto-iris lens, when it is required to implement iris adjustment, please refer to the Iris adjustment procedure in the setting page to adjust iris.

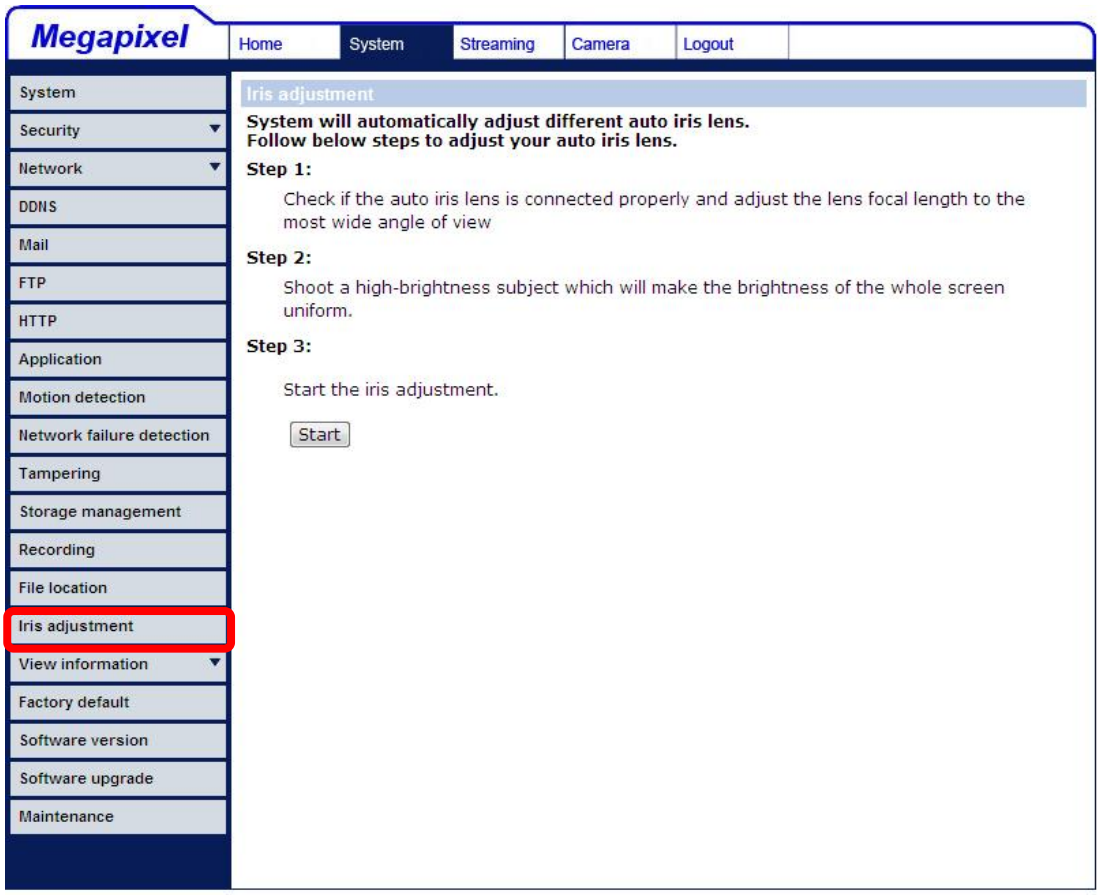

7.3.16 View Information

Click on the category: <View Information>, there will be a drop-down menu with tabs including <Log File>, <User Information>, and <Parameters>.

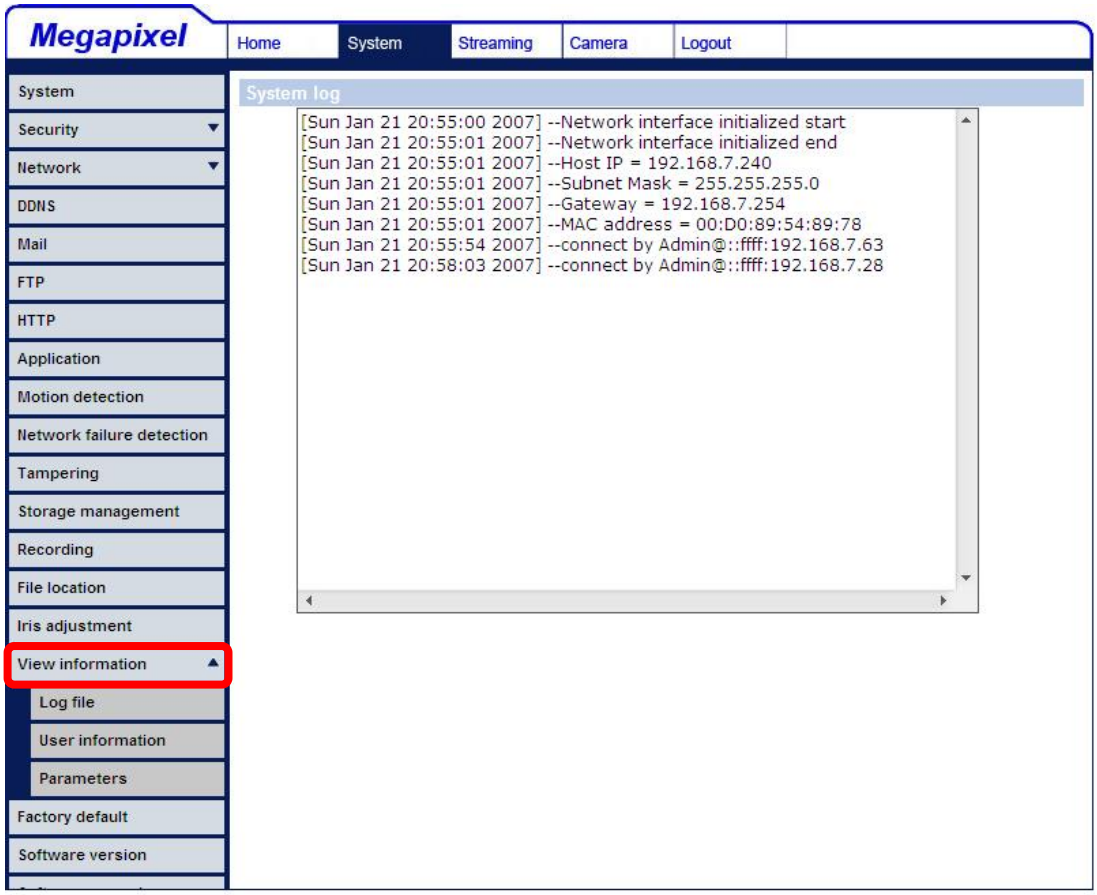

7.3.16.1 Log File

Click on the link to view the system log file. The content of the file provides useful information about configuration and connections after system boot-up.

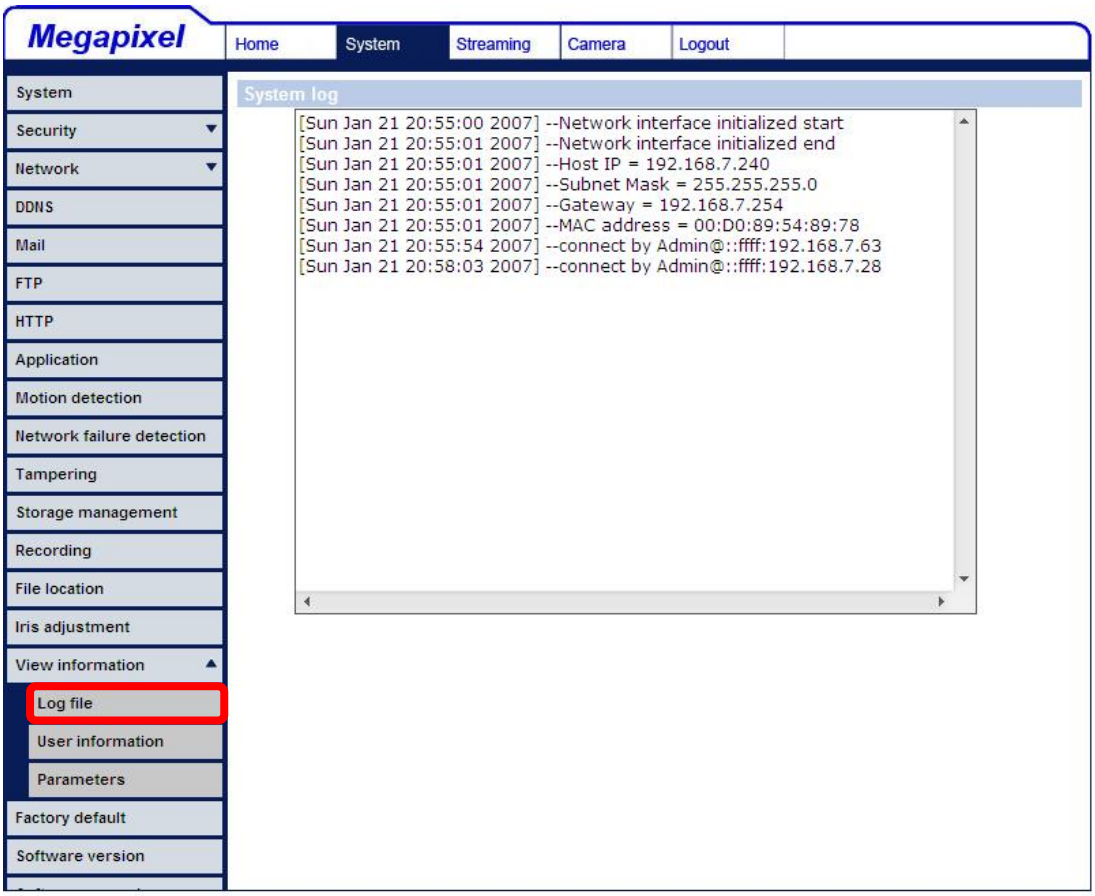

7.3.16.2 User Information

The Administrator can view each added user's login information and privileges (refer to 7.3.2 Security).

View User Login Information

All the users in the network will be listed in the <User information> zone, as shown below. As the figure below shows:

User: 4321

It indicates that one user's login username is "User", and the password is "4321".

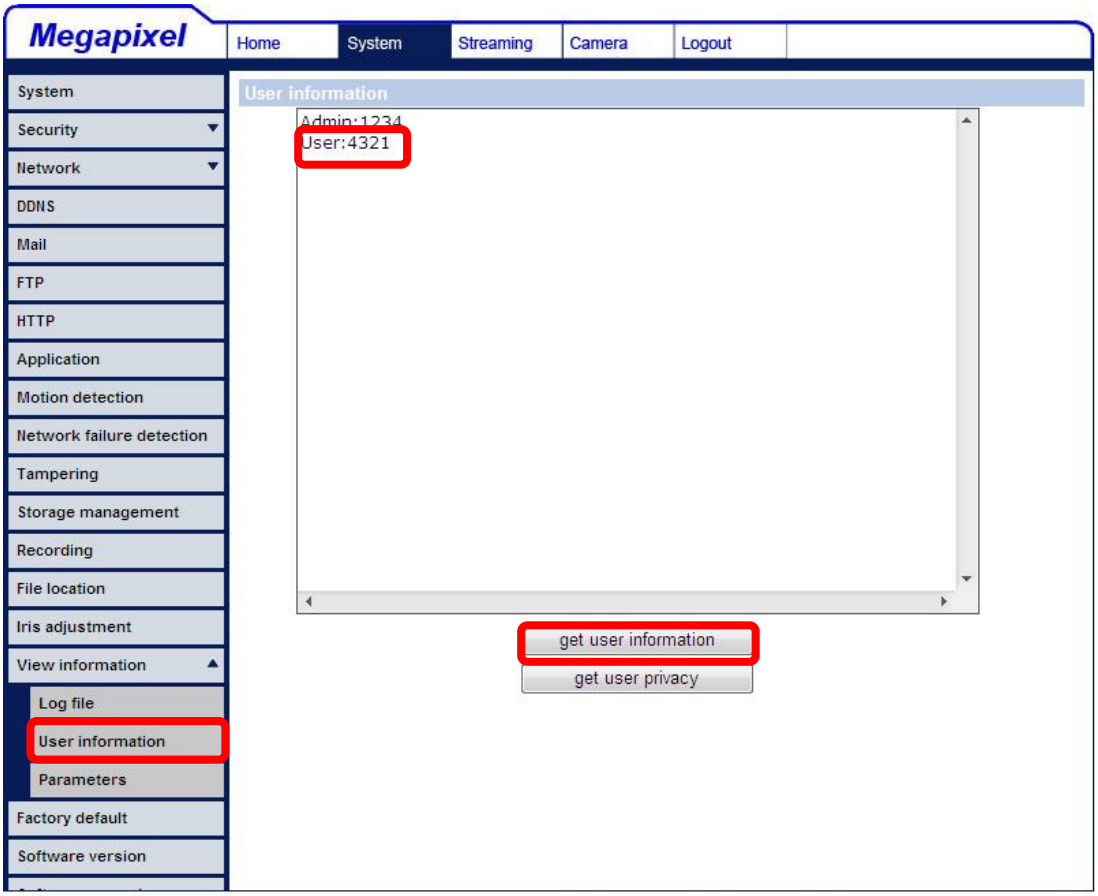

View User Privilege

Click on <get user privacy> down the page, and the Administrator can view each user's privileges.

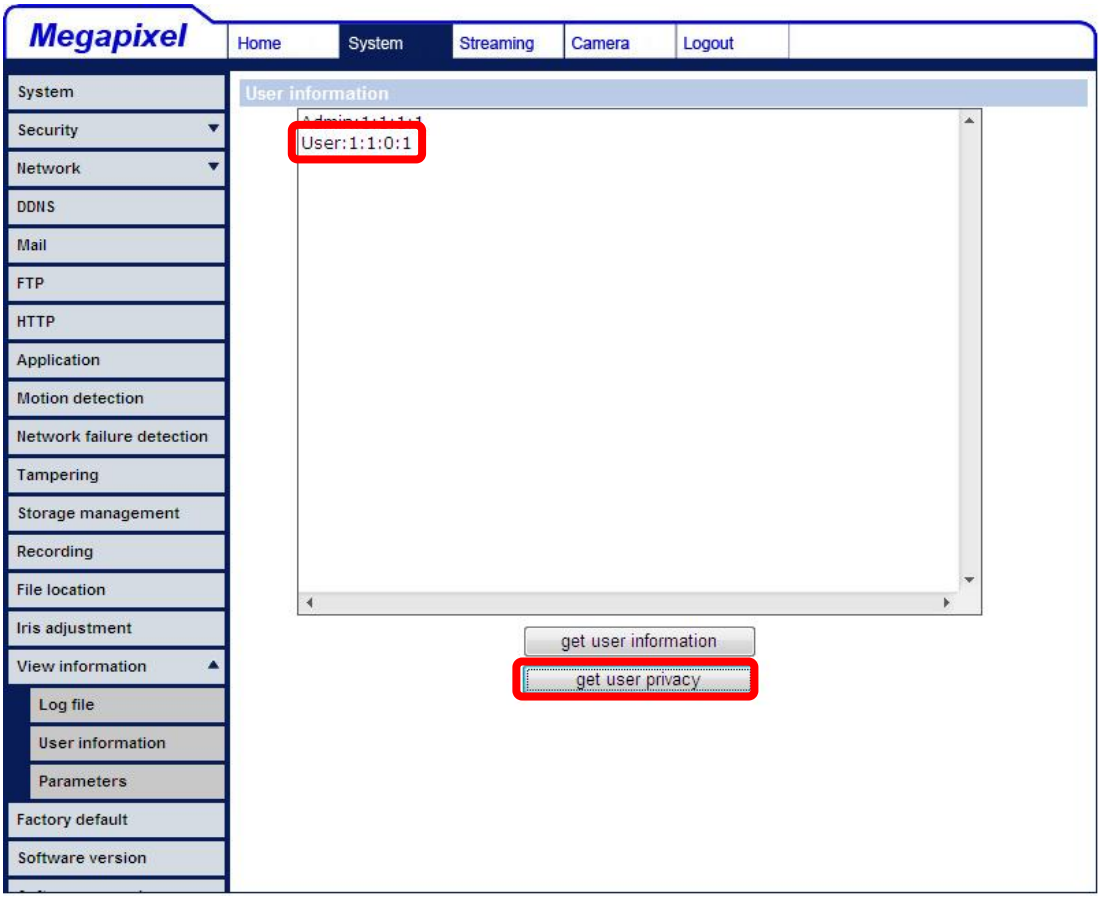

As the figure above shows:

User: 1:1:0:1

1:1:0:1= I/O access : Camera control : Talk : Listen (refer to 7.3.2 Security)

Therefore, it denotes the user is granted privileges of I/O access, Camera control and Listen.

7.3.16.3 Parameters

Click on this item to view the entire system's parameter setting.

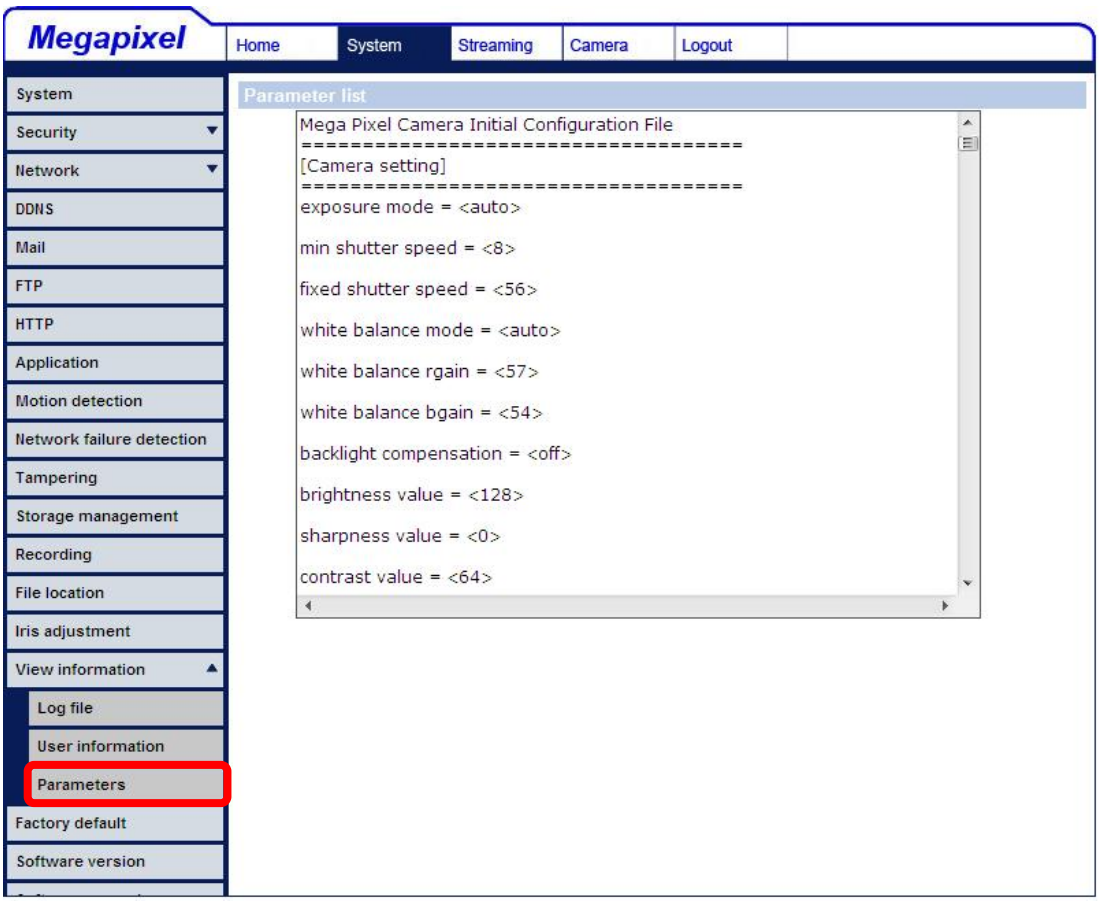

7.3.17 Factory Default

The factory default setting page is shown as below. Follow the instructions to reset the IP Camera to factory default setting if needed.

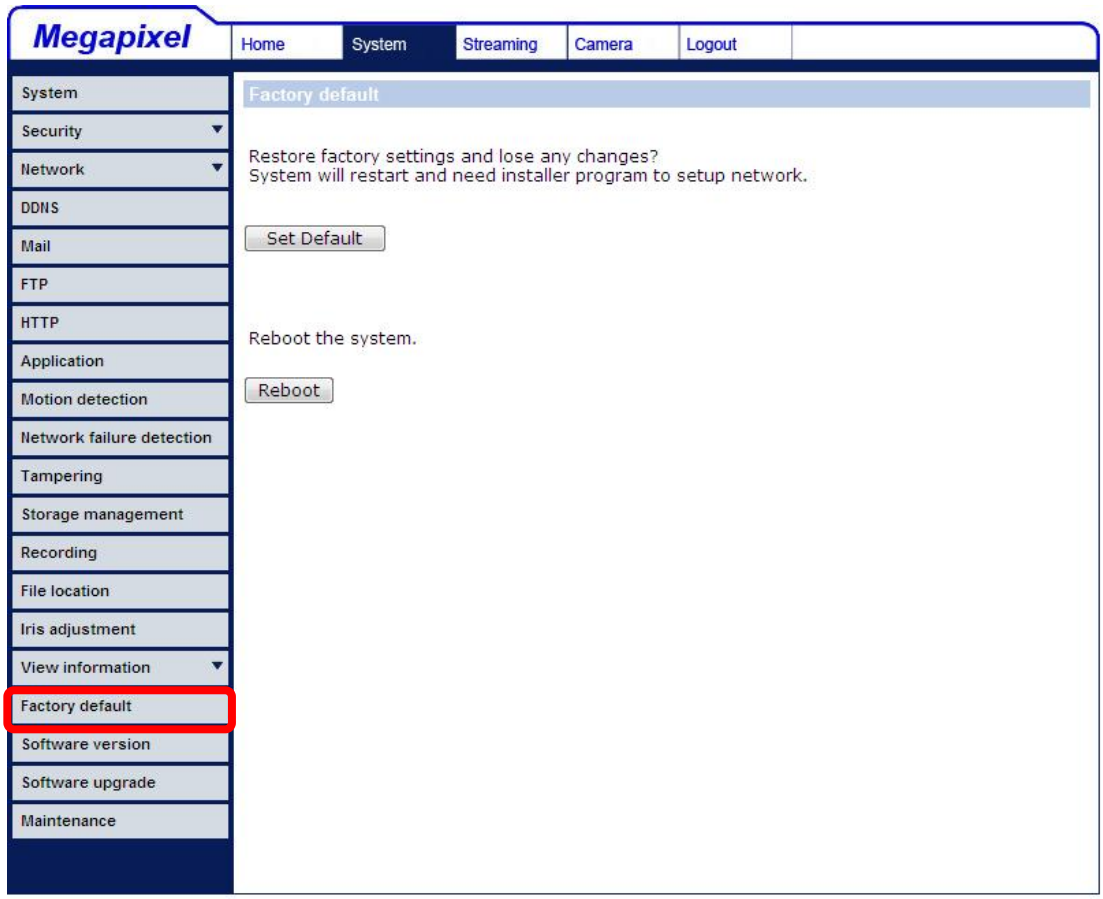

Set Default

Click on the <Set Default> button to recall the factory default settings. Then the system will restart in 30 seconds.

NOTE: The IP address will be restored to default.

Reboot

Click on the <Reboot> button, and the system will restart without changing current settings.

7.3.18 Software Version

The current software version is displayed in the software version page, which is shown as the figure below.

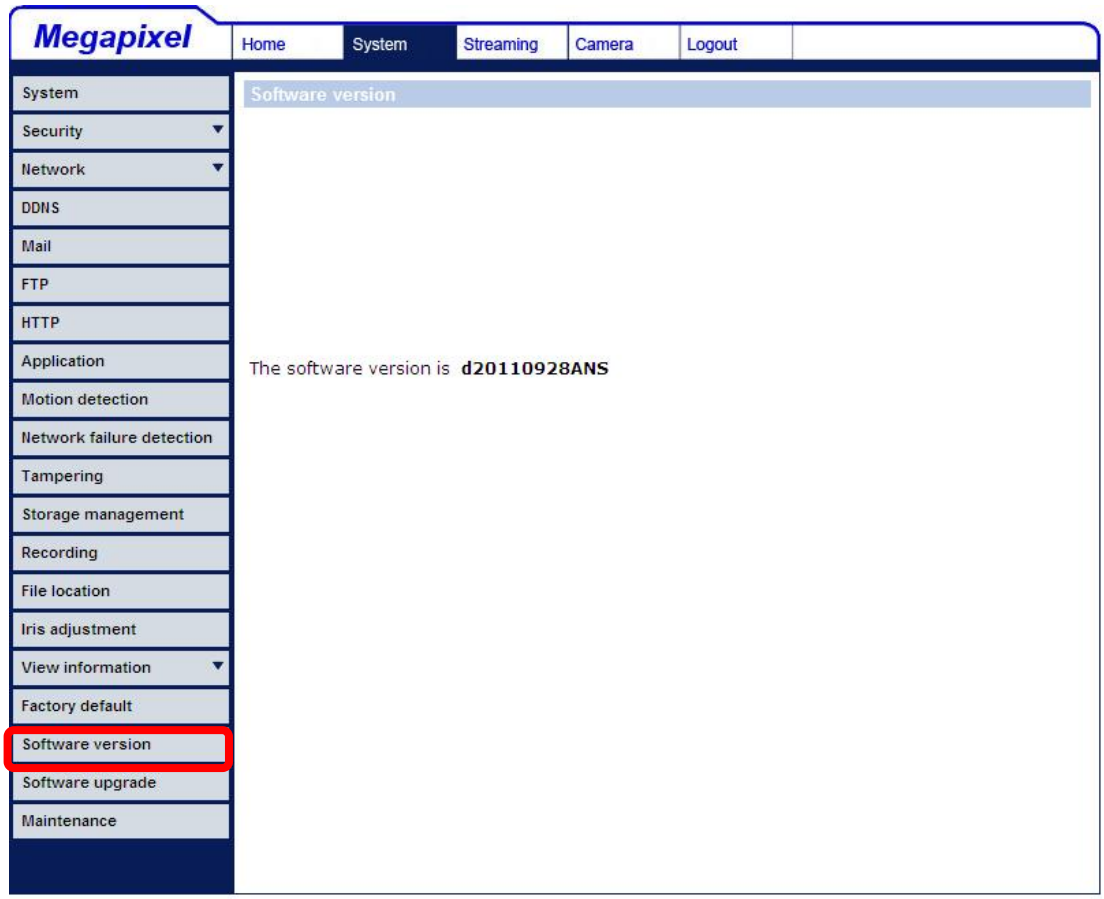

7.3.19 Software Upgrade

Software upgrade can be carried out in the <Software Upgrade> page, as shown below.

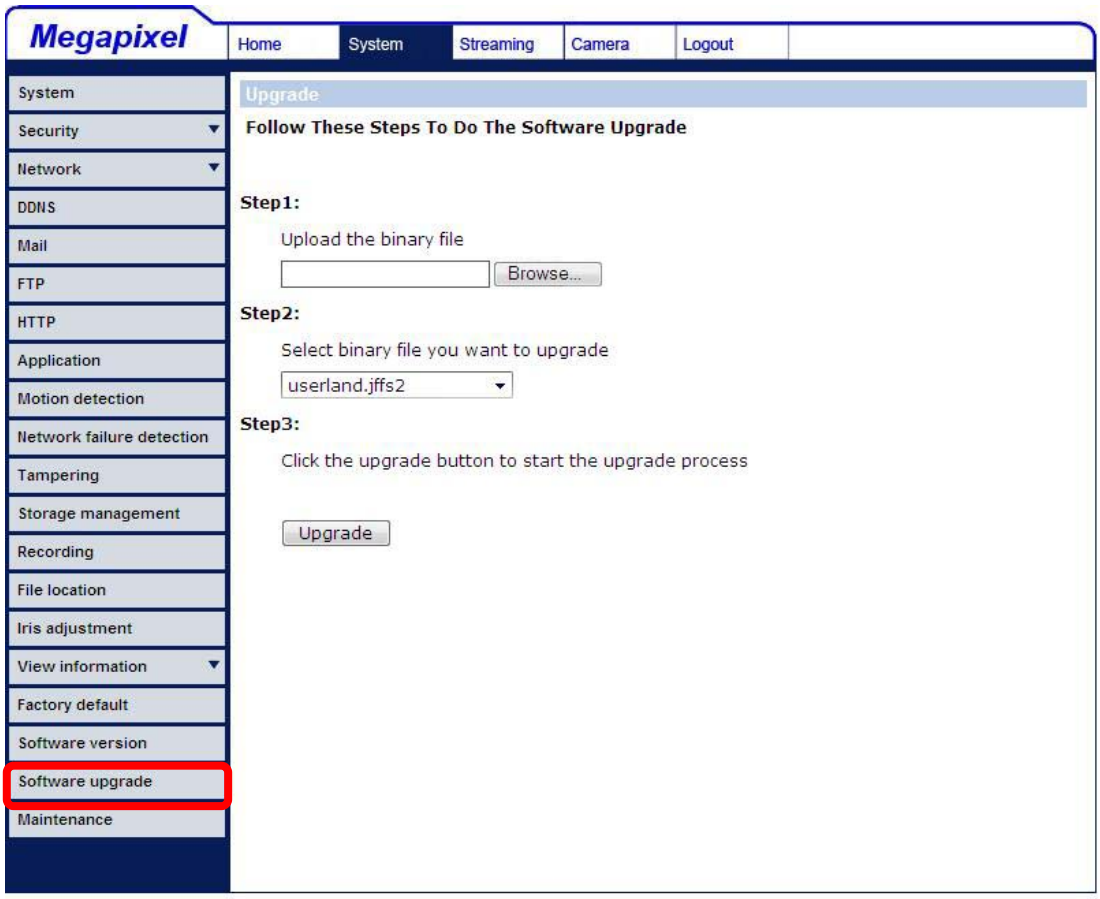

NOTE: Make sure the upgrade software file is available before carrying out software upgrade.

The procedure of software upgrade is like the following:

Step 1: Click on <Browse> and select the binary file to be uploaded, ex. Userland.jffs2.

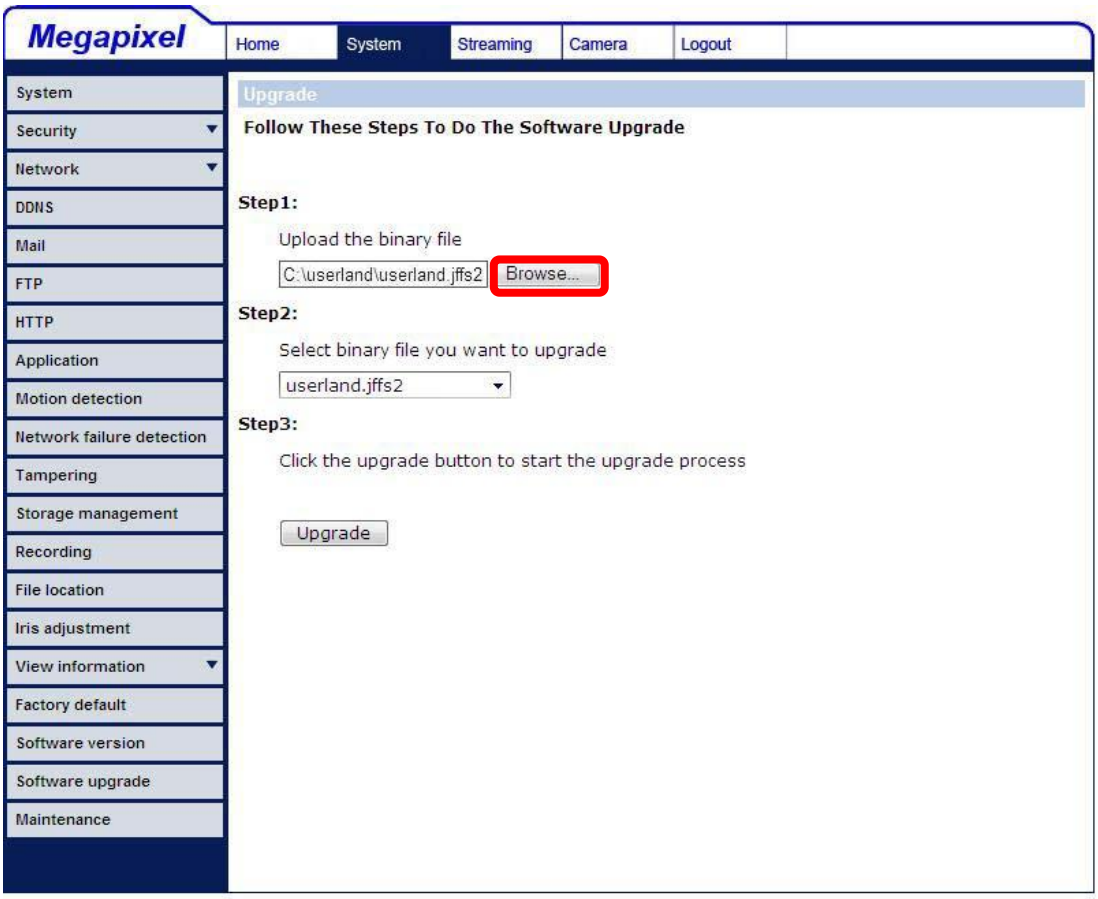

NOTE: Do not change the upgrade file name, or the system will fail to find the file.

Step 2: Pull down the upgrade binary file list and select the file you want to upgrade; in this case, select <userland.jffs2>.

Step 3: Click on <Upgrade>. The system will first check whether the upgrade file exists or not, and then begin to upload the upgrade file. Subsequently, the upgrade status bar will display on the page. When it runs to 100%, the upgrade process is finished.

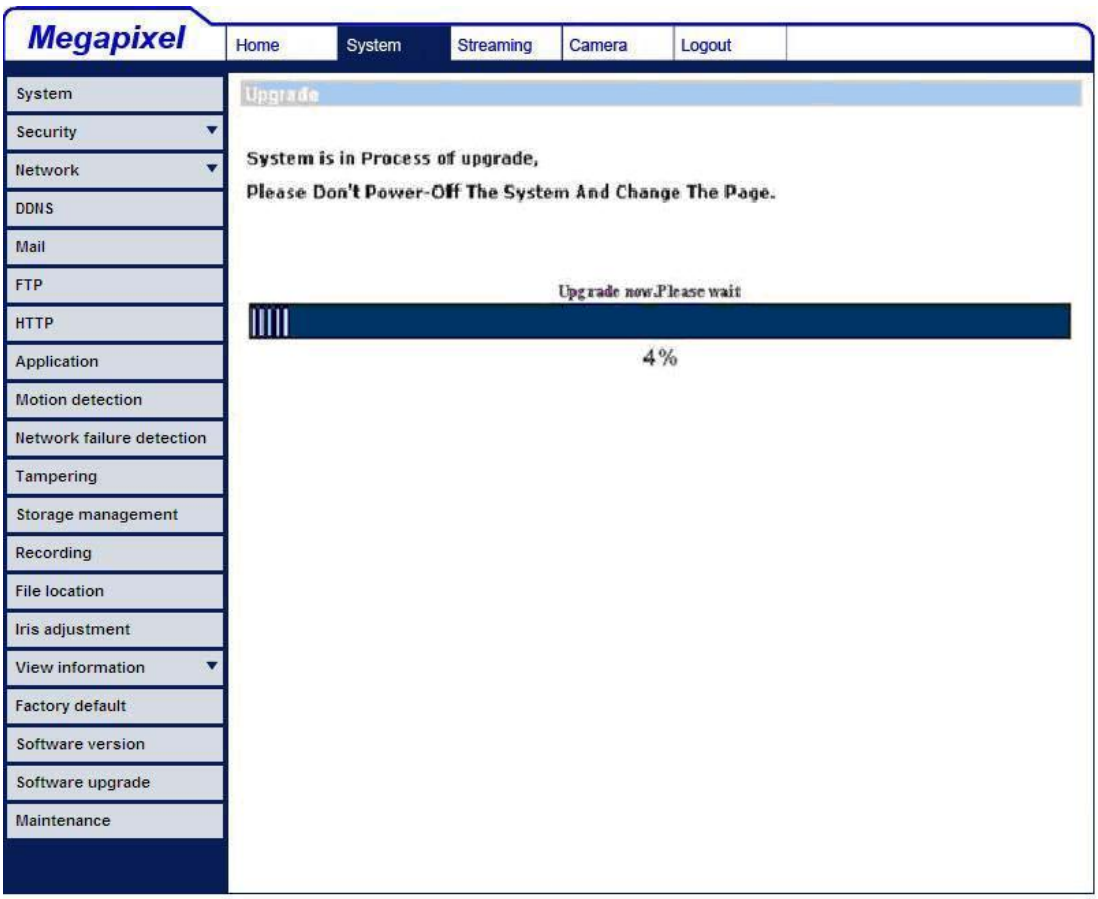

After the upgrade process is finished, the viewer will return to Home page.

Step 4: Close the video browser.

Step 5: Click on <Control Panel> and then double click on <Add or Remove Programs>. In the <Currently install programs> list, select <DCViewer> and click on the button <Remove> to uninstall the existing DC Viewer.

Step 6: Open a new web browser, re-login the IP Camera, and then allow the automatic download of DC Viewer.

7.3.20 Maintenance

Users can export configuration files to a specified location and retrieve data by uploading an existing configuration file to the IP Camera.

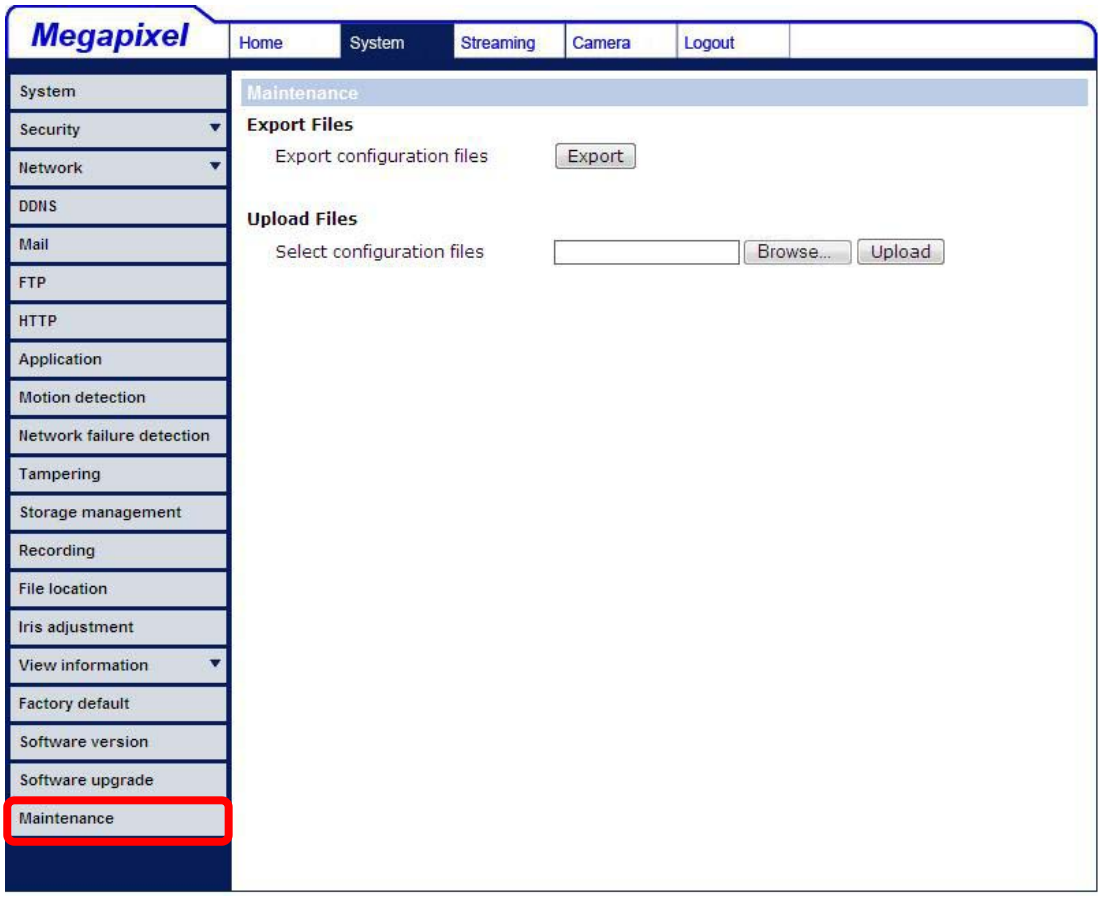

Export

Users can save the system settings by exporting the configuration file (.bin) to a specified location for future use. Click on the <Export> button, and the popup File Download window will come out as shown below. Click on <Save> and specify a desired location for saving the configuration file.

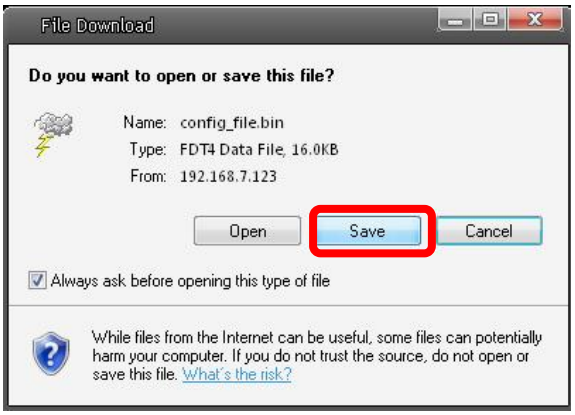
File Download
Do you want to open or save this file?
Name: config_file.bin
Type: FDT4 Data File, 16.0KB
From: 192.168.7.123
Open
Save
Cancel
Always ask before opening this type of file
While files from the Internet can be useful, some files can potentially harm your computer. If you do not trust the source, do not open or save this file. What's the risk?

Upload

To copy an existing configuration file to the IP Camera, please first click on <Browse> to select the configuration file, and then click on the <Upload> button for uploading.

7.4 Video and Audio Streaming Settings

Click on the tab <Streaming> in the top of the page, and the configurable video and audio items will display in the left column. In Streaming, the Administrator can configure specific video resolution, video compression mode, video protocol, audio transmission mode, etc. Further details of these settings will be specified in the following sections.

7.4.1 Video Resolution and Rotate Type

The video setting page is shown below:

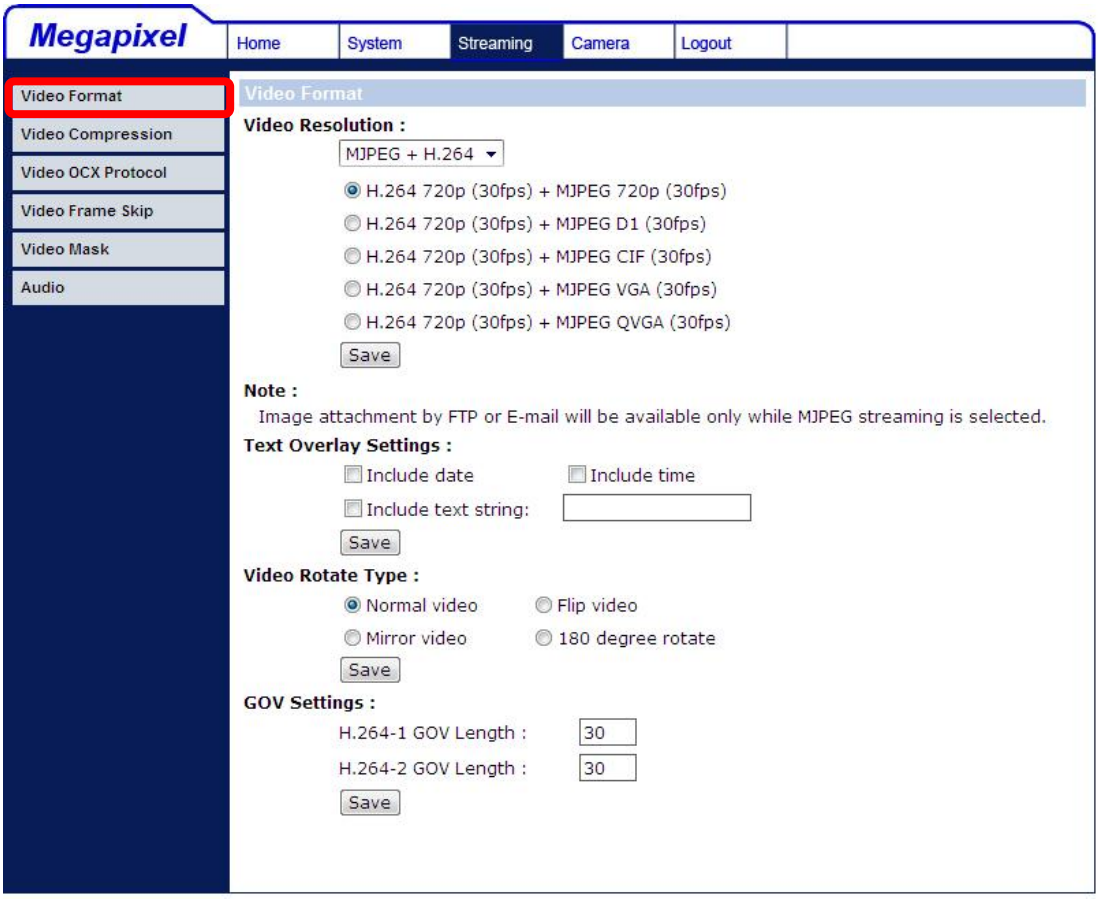

Video Format

Resolution for MJPEG & H.264 format includes:

H.264 + MJPEG	H.264 720p (30fps) + MJPEG 720p (30fps)*
	H.264 720p (30fps) + MJPEC D1 (30fps)
	H.264 720p (30fps) + MJPEG CIF (30fps)
	H.264 720p (30fps) + MJPEG VGA (30fps)
	H.264 720p (30fps) + MJPEG QVGA (30fps)
MJPEG	MJPEG 1080p (30/15fps)
	MJPEG SXGA (30fps)
H.264 + H.264	H.264 720p (30fps) + H.264 D1 (30fps)
	H.264 720p (30fps) + H.264 CIF (30fps)
	H.264 720p (30fps) + H.264 VGA (30fps)
	H.264 720p (30fps) + H.264 QVGA (30fps Baseline)
H.264	H.264 1080p (30/15fps)
	H.264 SXGA (30fps)

(*) Default

Click on <Save> to confirm the setting.

Text Overlay Settings

Users can select the items to display data including date/time/text on the live video pane. The maximum length of the string is 18 alphanumeric characters.

Click on <Save> to confirm the Text Overlay setting.

Video Rotate Type

Users can change video display type if necessary. Selectable video rotate types include Normal, Flip, Mirror and 180 degree. Differences among these types are illustrated as below.

Suppose the displayed image of the IP Camera is shown as the figure below.

To rotate the image, users can select <Flip>, for instance. Then the displayed image will be reversed as shown below.

The following is descriptions for different video rotate type.

- **Flip**
  If select <Flip>, the image will be rotated vertically.

- **Mirror**
  If select <Mirror>, the image will be rotated horizontally.

- **180 Degree**
  Selecting <180 Degree> will make the image 180° counter-/clockwise inversed.

Click on <Save> to confirm the setting.

GOV Settings

Users can set the GOV length to determine the frame structure (I-frames and P-frames) in a video stream for saving bandwidth. Longer GOV means decreasing the frequency of I-frames. Click on <Save> to confirm the GOV setting.

7.4.2 Video Compression

Users can specify the values for MJPEG/H.264 compression mode in the video compression page (see the figure below), depending on the application.

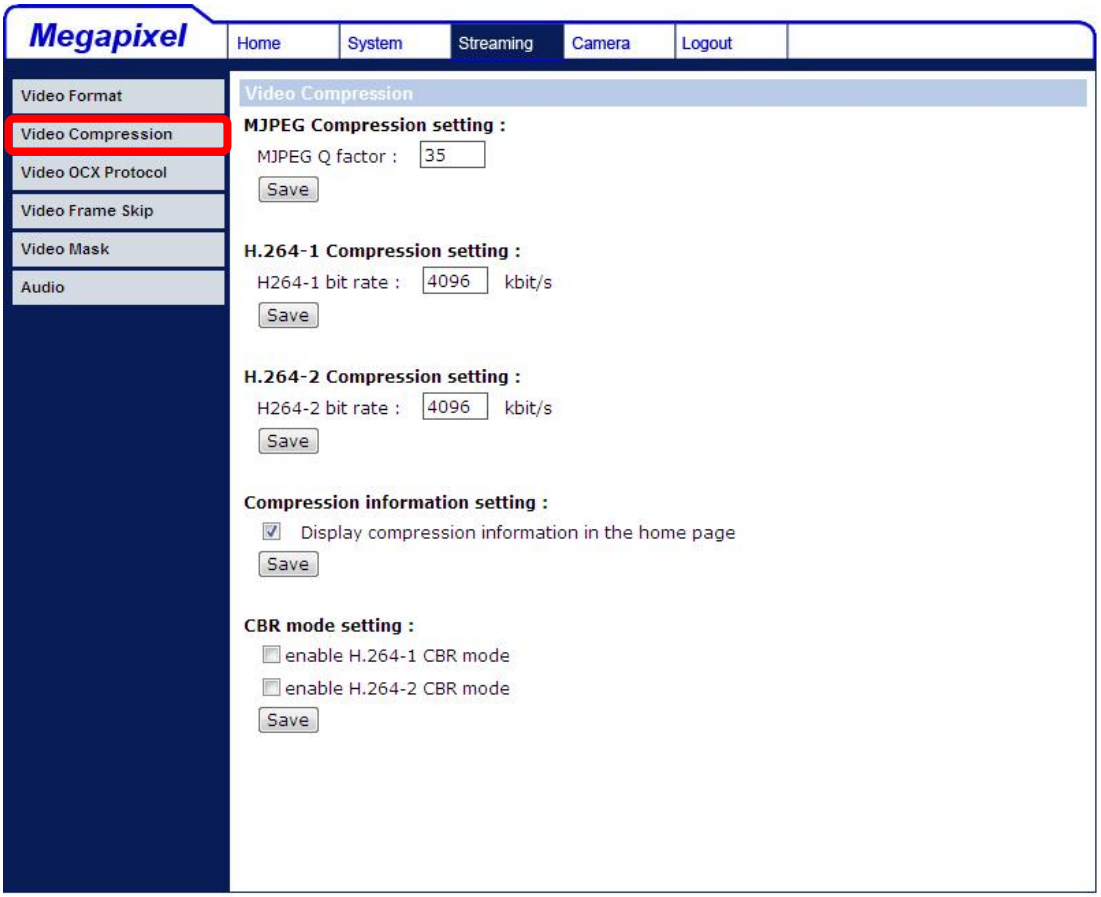

MJPEG Q (Quality) factor

Higher value implies higher bit rates and higher visual quality. The default setting of MJPEG Q factor is 35; the setting range is from 1 to 70. Click on <Save> to confirm the setting.

H.264-1/ H.264-2 bit rate

The default setting of H.264-1/ H.264-2 is 4096 kbit/s; the setting range is from 64 to 8192 kbit/s. Click on <Save> to confirm the setting.

NOTE: The maximum value of the H.264-2 bit rate is 1024 kbit/s when the resolution is set as “H.264 720p (30fps) + H.264 QVGA (30fps Baseline)”.

Display Compression Information

Users can also decide whether to display compression information on the Home page. Click on <Save> to confirm the setting.

CBR Mode Setting

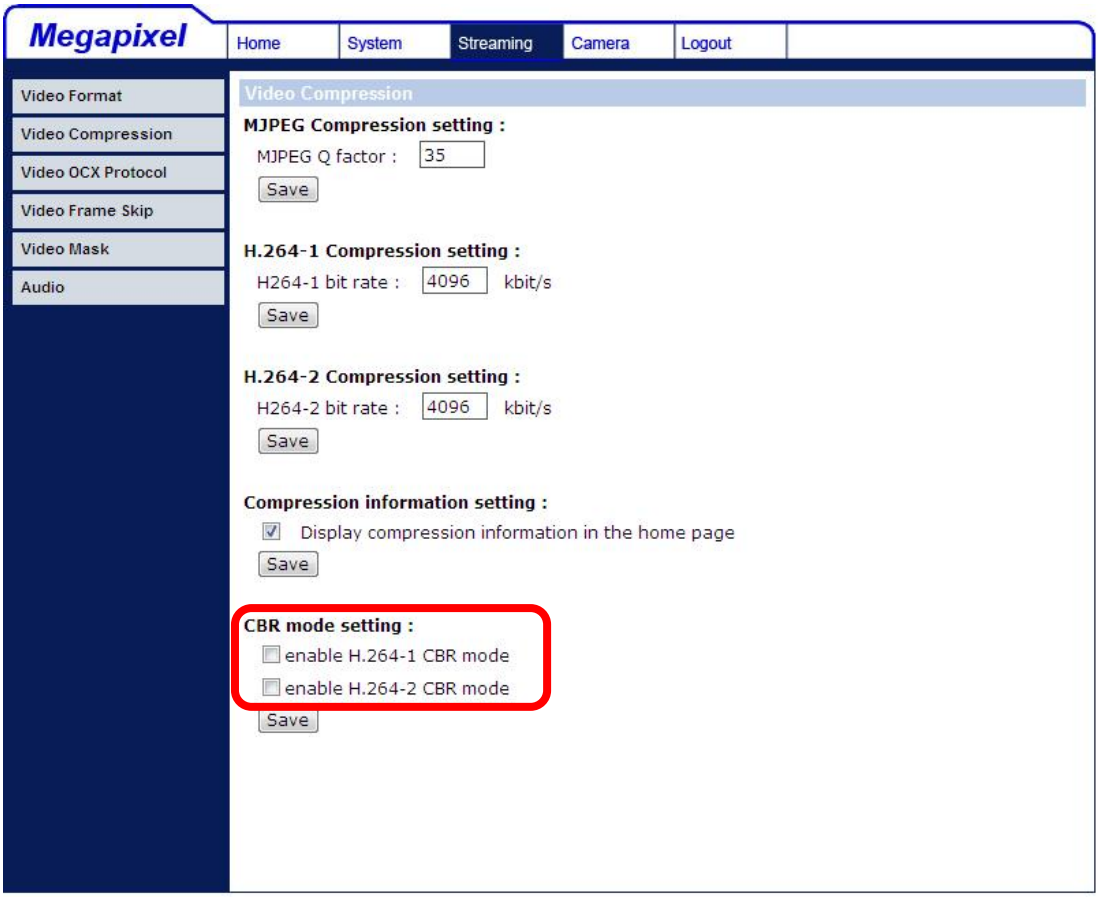

The CBR (Constant Bit Rate) mode could be the preferred bit rage mode if the bandwidth available is limited. It is important to take account of image quality while choosing to use CBR mode.

7.4.3 Video OCX Protocol

In the Video OCX protocol setting page, users can select RTP over UDP, RTP over TCP, RTSP over HTTP or MJPEG over HTTP, for streaming media over the network. In the case of multicast networking, users can select the Multicast mode. The page is shown as follows.

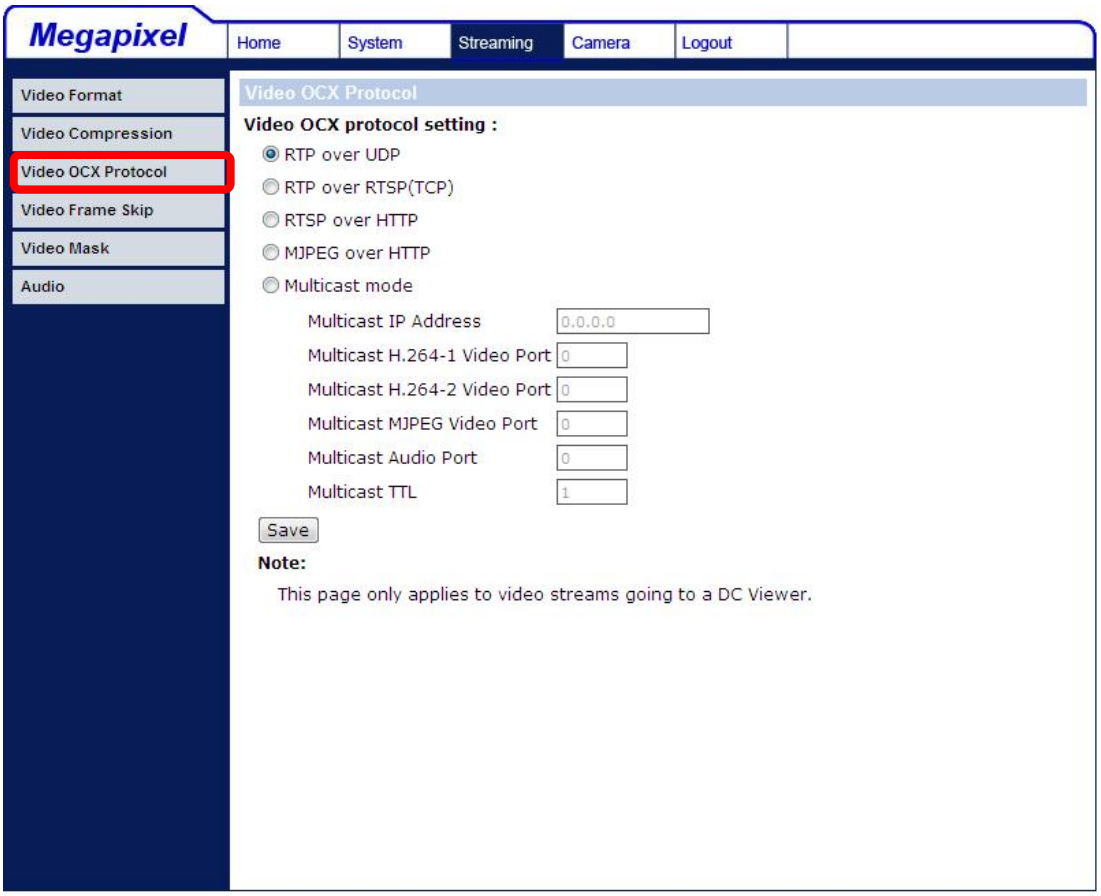

Video OCX protocol setting options include:

- **RTP over UDP / RTP over RTSP(TCP) / RTSP over HTTP / MJPEG over HTTP**

- **Multicast Mode**
  Enter all required data, including multicast IP address, H.264 video port, MJPEG video port, audio port and TTL into each blank.

Click on <Save> to confirm the setting.

7.4.4 Video Frame Skip

Video frame skipping is for saving bandwidth, if necessary. The setting page is shown as below.

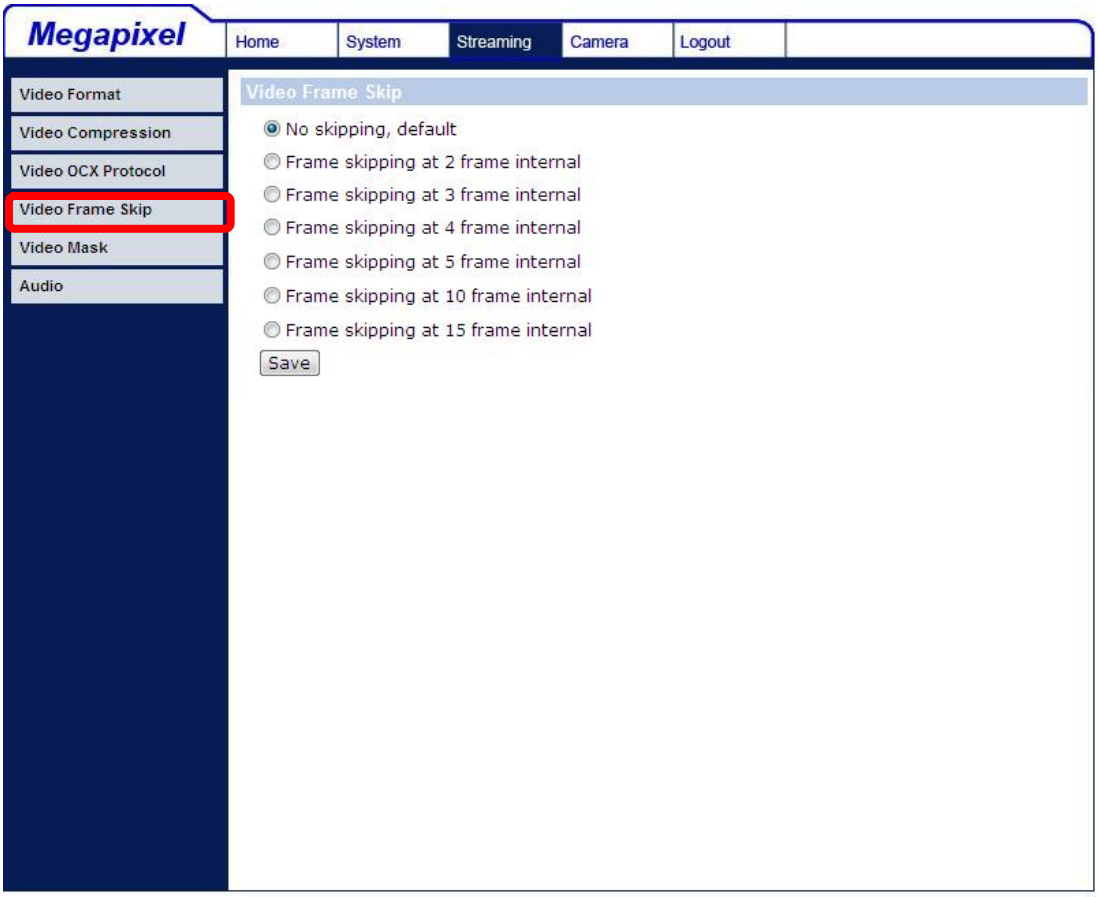

Video Frame Skip options include:

- No skipping, default
- Frame skipping at 2 frame internal
- Frame skipping at 3 frame internal
- Frame skipping at 4 frame internal
- Frame skipping at 5 frame internal
- Frame skipping at 10 frame internal
- Frame skipping to 15 frame internal

Click on <Save> to confirm the setting.

NOTE: Higher frame skipping rate will decrease video smoothness.

7.4.5 Video Mask

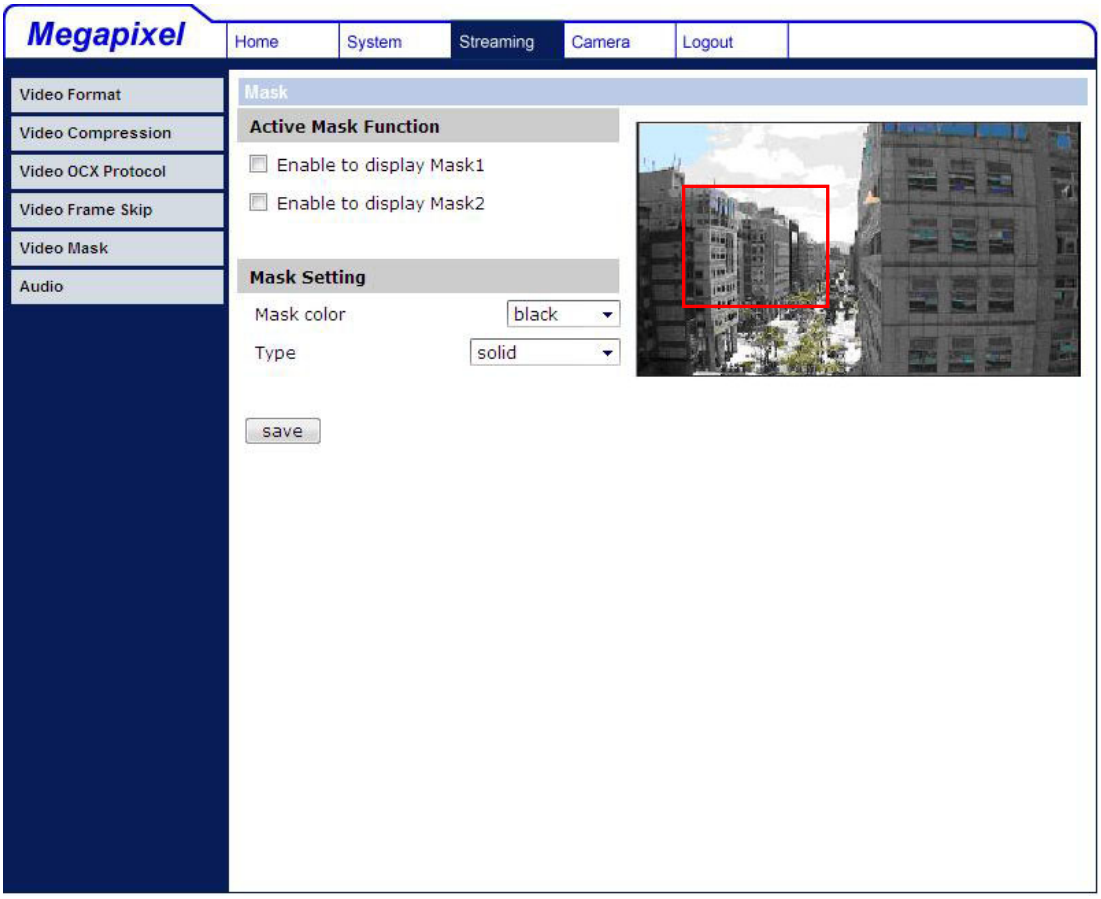

Active Mask Function

- **Add a Mask**
  Check a Video Mask checkbox, and a red frame will come out in the Live Video pane at the right side. Use the mouse to drag and drop to adjust the mask's size and place it on the target zone.

  NOTE: It is suggested to set the Video Mask twice bigger than the object.

- **Cancel a Mask**
  Uncheck the checkbox of the Video Mask meant to be deleted, and the selected mask will disappear from the Live Video pane instantly.

Mask Setting

- **Mask color**
  The selections of Mask color include red, black, white, yellow, green, blue, cyan, and magenta.

- **Type**
  Select to change the mask type as solid or transparent.

Click on <Save> to confirm the setting.

7.4.6 Audio Mode and Bit Rate Settings

The audio setting page is show as below. In the Audio page, the Administrator can select one transmission mode and audio bit rate.

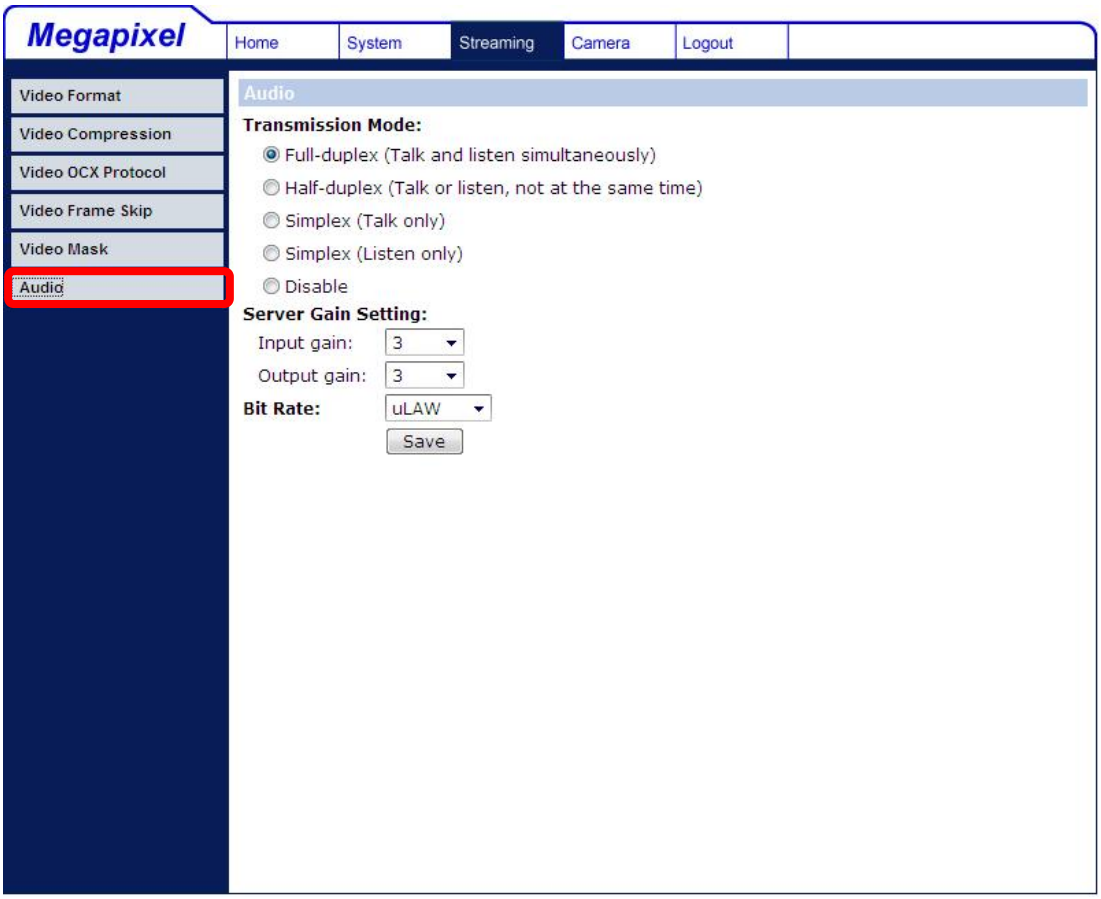

Transmission Mode

- **Full-duplex (Talk and Listen simultaneously)**
  In the Full-duplex mode, the local and remote sites can communicate with each other simultaneously, i.e. both sites can speak and be heard at the same time.

- **Half-duplex (Talk or Listen, not at the same time)**
  In the Half-duplex mode, the local/remote site can only talk or listen to the other site at a time.

- **Simplex (Talk only)**
  In the Talk only Simplex mode, the local/remote site can only talk to the other site.

- **Simplex (Listen only)**
  In the Listen only Simplex mode, the local/remote site can only listen to the other site.

- **Disable**
  Select the item to turn off the audio transmission function.

Server Gain Setting

Set the audio input/output gain levels for sound amplification. The audio gain values are adjustable from 1 to 6. The sound will be turned off if the audio gain is set to <Mute>.

Bit Rate

Selectable audio transmission bit rate include 16 kbps (G.726), 24 kbps (G.726), 32 kbps (G.726), 40 kbps (G.726), uLAW (G.711) and ALAW (G.711). Both uLAW and ALAW signify 64 kbps but in different compression formats. Higher bit rate will let higher audio quality and require bigger bandwidth.

Click on <Save> to confirm the setting.

7.5 Camera Settings

The figure below is the camera configuration page. Details of each parameter setting are described in the following subsections.

7.5.1 Exposure Setting

The Exposure pull-down menu is shown as follows:

The exposure is the amount of light received by the image sensor and is determined by the width of lens diaphragm opening, the amount of exposure by

the sensor (shutter speed) and other exposure parameters. With this item, users can define how the Auto Exposure function works.

Each exposure mode is specified as follows:

Full Auto Mode

In this mode, the camera's Shutter Speed, IRIS and AGC (Auto Gain Control) control circuits work together automatically to get consistent video output level. The shutter speed range is from 1 (1/1.5) to 1/30 (1/25) sec. with 6 (5) options. Users could select suitable shutter speed according to the environmental illuminance.

NOTE: The minimum shutter speed set in the Full Auto Mode will be applied to **Auto Iris Mode**.

Auto Iris

In this mode, the exposure gives priority to the auto iris. Shutter speed and AGC circuit will function automatically in cooperating with IRIS to get consistent exposure output.

NOTE: The minimum shutter speed will vary depending on the setting in **Full Auto Mode**.

Fixed Shutter Mode

In this mode, fixed shutter speed could be selected from the dropdown menu. The shutter speed range is from 1/10000 to1 (1/1.5) sec. with 19 (18) options. Users could select suitable shutter speed according to the environmental illuminance.

7.5.2 White Balance Setting

The White Balance pull-down menu is shown as follows:



A camera needs to find reference color temperature, which is a way of measuring the quality of a light source, for calculating all the other colors. The unit for measuring this ratio is in degree Kelvin (K). Users can select one of the White Balance Control modes according to the operating environment. The following table shows the color temperature of some light sources for reference.

Light Sources	Color Temperature in K
Cloudy Sky	6,000 to 8,000
Noon Sun and Clear Sky	6,500
Household Lighting	2,500 to 3,000
75-watt Bulb	2,820
Candle Flame	1,200 to 1,500

Auto Mode

The Auto Balance White mode is suitable for environment with light source having color temperature in the range roughly from 2700 ~ 7800K.

ATW Mode (Auto Tracking White Balance)

With Auto Tracking White Balance function, the white balance in a scene will be automatically adjusted while temperature color is changing. The ATW Mode is suitable for environment with light source having color temperature in the range roughly from 2500 ~ 10000K.

Manual Mode

In this mode, users can change the White Balance value manually. Users can select a number between 0 ~127 of <Rgain/ Bgain> item to gain the red/ blue illuminant on the Live Video Pane. Click on < √ > to confirm the new setting.

7.5.3 Backlight Setting

The Backlight Compensation function prevents the center object from being too dark in surroundings where excessive light is behind the center object. Click on < √ > to confirm the new setting.

7.5.4 Brightness Setting



Users can adjust the image's brightness by adjusting the item. To increase video brightness, select a bigger number. Click on < √ > to confirm the new setting.

7.5.5 Sharpness Setting



Increasing the sharpness level can make the image looked sharper; especially enhance the object's edge. Click on < √ > to confirm the new setting.

7.5.6 Contrast Setting

Camera image contrast level is adjustable; please select ranging from -6 to +19. Click on < √ > to confirm the new setting.

7.5.7 Saturation Setting

Camera image saturation level is adjustable; please select ranging from -6 to +19. Click on < √ > to confirm the new setting.

7.5.8 Hue Setting

Camera image hue level is adjustable; please select ranging from -12 to +13. Click on < √ > to confirm the new setting.

7.5.9 IR Function

Auto/On/Off Mode

With the IR cut filter, the IP Camera can still catch clear image at night time or in low light conditions.

For the camera with the built-in IR LED module, there will be three additional IR function modes as follows:

Light Sensor Mode

IR LED lights will be turned on/off depending on the light sensor.

Light On Mode

In this mode, IR LED lights will be always on.

Light Off Mode

In this mode, IR LED lights will be always off.

Smart Mode

The Smart Mode enhances the monochrome/night mode stability in the scenario that IR illumination is dominant. In this mode, when the external IR

illuminator is turned on, the IR cut filter of the IP Camera will keep open (i.e. monochrome/night mode), preventing the camera from returning to the color/day mode when IR illumination is dominant.

Additionally, for the models with built-in IR LED module, the day/night IR switching mechanism will depends on the ambient light level instead of the light sensor (Light sensor mode) on the IR LED module.

Click on < √ > to confirm the new setting.

7.5.10 TV System Setup



Select the video format that matches the present TV system. Click on < √ > to confirm the new setting.

7.6 Logout

Click on the tab <Logout> in the top of the page, and the login window will pop up. This enables login with another user name.

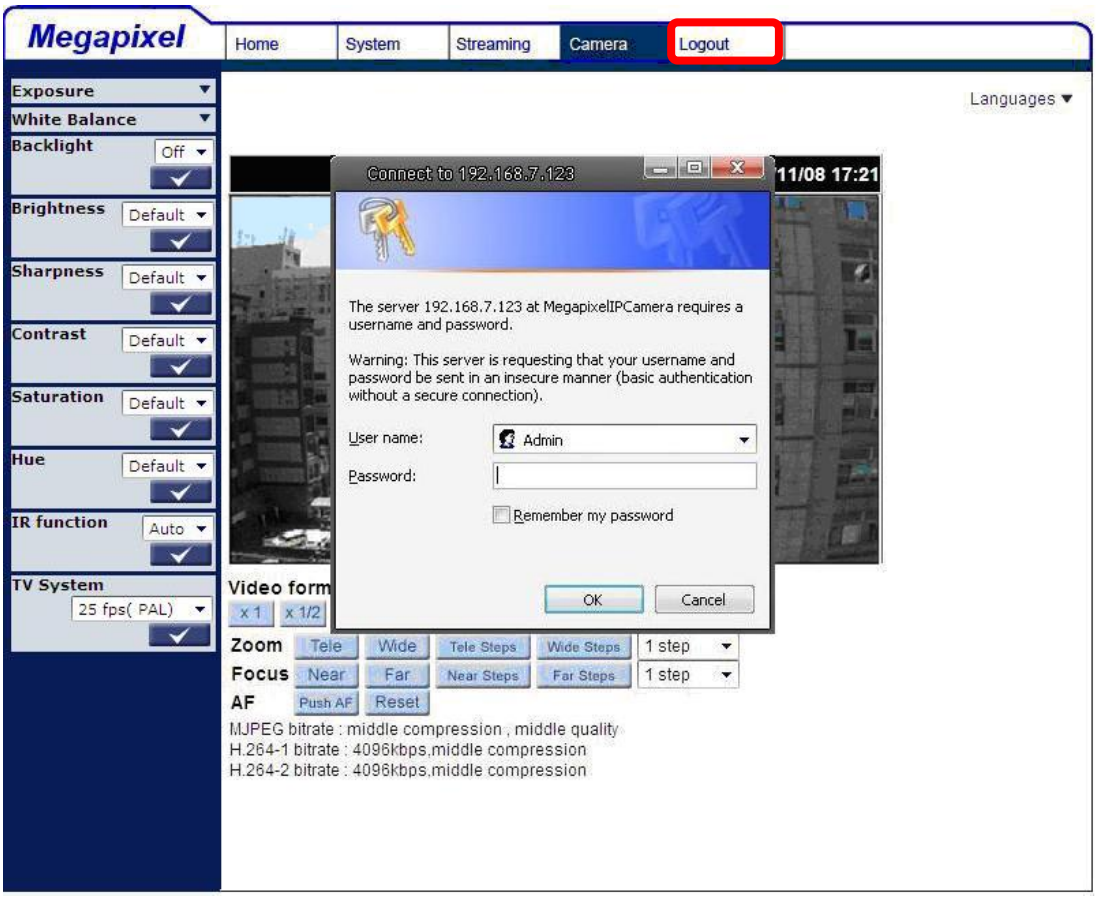

8. CMS Software Introduction

The IP Camera bundles Central Management System (CMS) software. Offering powerful functionalities via intuitive interface, it is a centralized monitoring solution of your video surveillance equipments.

It gives the user access to monitor multiple IP Cameras and Digital Video Recorders (DVRs), and allows the user to simultaneously monitor 16 sites per group (up to 10 groups) within several clicks.

For further information on CMS software, please refer to the supplied CD.

Note: The free bundle CMS is a function-limited software. For additional features, please purchase a licensed CMS.

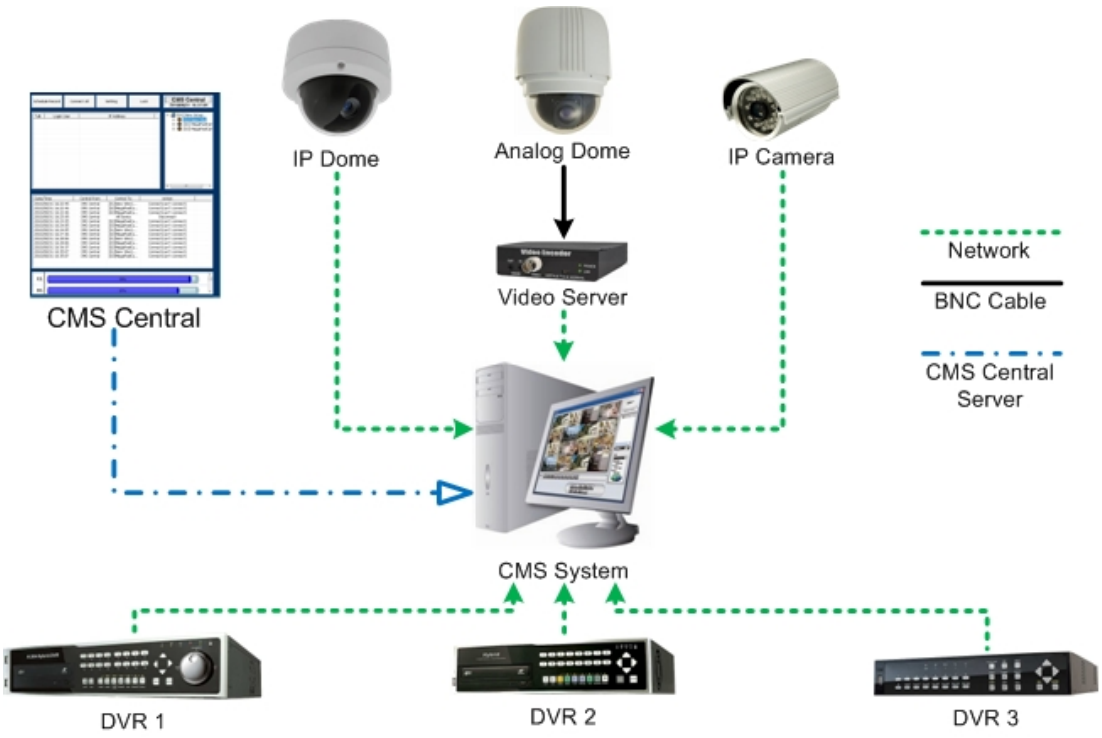

Appendix A: Technical Specifications

Camera		**Full HD/ Full HD Real-time**	
Image Sensor		1/2.5” Progressive CMOS	1/2.7” Progressive CMOS
Effective Pixels		1920(H) x 1080(V)	
Minimum Illumination		Color: 0.2 lux B/W: 0.02 lux	Board Lens: Color: 0.2 lux B/W: 0.02 lux
Shutter Speed		1~ 1/10000 sec.	
White Balance		Manual / AWB/ ATW	
Lens			
Lens Type		Vari-focal/ Motorized lens: F 1.4 / f= 3.3~12 mm	Vari-focal/ Motorized lens: F 1.2 / f= 3~9 mm Board Lens: F 1.5/ f= 4 mm
FOV		71° (W) ~ 21° (T)	Vari-focal/ Motorized: 103.5° (W) ~ 34.3° (T) Board Lens: 78°
Operation			
Video Compression		H.264/ MJPEG	
Video Streaming		Simultaneous	H.264 + MJPEG
			H.264 + H.264
Resolution	H.264	Full HD 1080p/ HD 720p/ SXGA/ D1/ VGA/ QVGA/ CIF	
	MJPEG	Full HD 1080p/ HD 720p/ SXGA/ D1/ VGA/ QVGA/ CIF	
Frame Rate		Full HD: 15 fps Full HD Real-time: 25/30 fps	
Image Setting	Brightness	Manual	
	Backlight Compensation	On/Off	
	Exposure	Auto/Manual	
	Sharpness	Manual	
	Contrast	Manual	
	White Balance	Auto/Manual	
	Saturation	Manual	
	Hue	Manual	
	Digital Zoom	Support	
	Motion detection	On/Off	
	Privacy Mask	Support	
	Privacy Mask Type	Transparent, Color	
	ICR*	Auto/On/Off	
	Tampering Alarm	On/Off	
Audio	Two-way Audio	Line out, Line in/ mic in	
	Compression	G.711/G.726	
Alarm	Input	5V 10kΩ pull up	
	Output	Photo Relay Output 300V DC/AC	
Event Notification		HTTP, FTP, SMTP	
Multiple Languages		English, French, German, Italian, Korean, Simplified Chinese, Russian	
Network			
Interface		10/100Mbps Ethernet (RJ-45)	
Protocol		IPv4/ v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP,FTP, SMTP, DHCP, PPPoE, UPnP, IGMP, SNMP, QoS, and ONVIF	
Password Levels		User and Administrator	
Security		HTTPS, IP Filter, IEEE 802.1X	
Internet Browser		Internet Explorer (6.0+), Chrome, Firefox, Safari	
User Account		20	
Mechanical			
Built-in IR	Working distance	up to 25m	

Illuminator (Optional)	Wavelength	850nm
	Number of LEDs	23
Connectors	Power	3-pin terminal block
	Ethernet	RJ-45
	Micro SD	SDHC support
	Audio Out	Female Stereo phone jack, ø 3.5 mm
	Mic In/ Line In	Female Stereo phone jack, ø 3.5 mm
	Alarm In/ Out	4-pin alarm wires
	Analog Video	1.0 Vp-p / 75Ω, BNC
LED Indicator		Power, Link, ACT
General		
Operating Temperature		-10°C ~ 50°C (14°F ~ 122°F) with Heater, powered by DC12V/AC24V: -35°C~50°C (-31°F~122°F) Humidity: 10% to 90%, no condensation
Power Source		DC12V/ AC24V/ PoE
Power Consumption		System: 5.5W (Built-in IR Illuminator: +3W; Motorized Lens: +3.6W; Heater: +12W)
Weatherproof Standard		IP66
Regulatory		CE, FCC, RoHS Compliant
Dimension		⌀ 84 x 180 mm (⌀ 3.3 x 7.1 in.) w/ Sunshield: ⌀ 84 x 193 mm (⌀ 3.3 x 7.6 in.)
Weight		0.94 kg (2.07 lb)

(*) Optional

Appendix B: Internet Security Settings

If ActiveX control installation is blocked, please either set Internet security level to default or change ActiveX controls and plug-ins settings.

Internet Security Level: Default

Step 1: Start the Internet Explorer (IE).

Step 2: Select <Tools> from the main menu of the browser. Then Click on<Internet Options>.

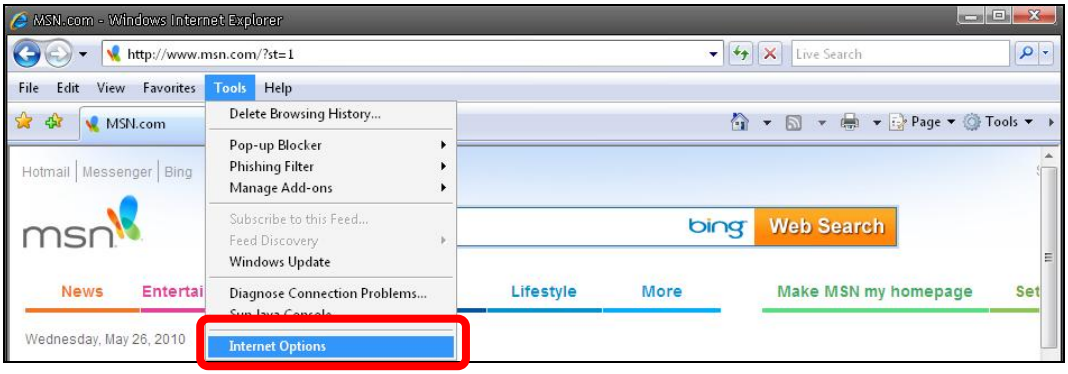

Step 3: Click on the <Security> tab, and select <Internet>.

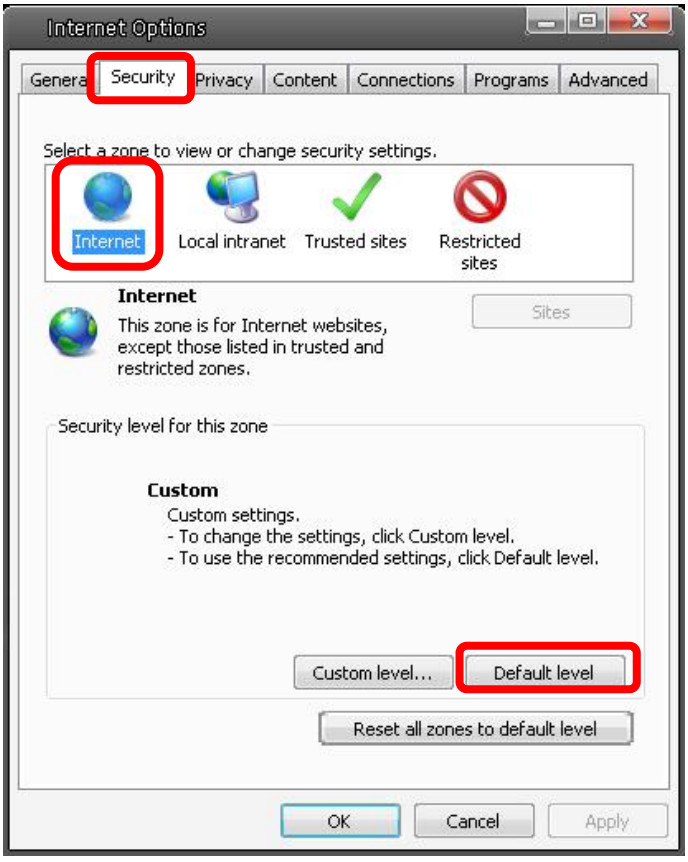

Step 4: Down the page, click on <Default Level> (see the figure above) and click on <OK> to confirm the setting. Close the browser window, and open a new one later when accessing the IP Camera.

ActiveX Controls and Plug-ins Settings

Step 1~3: Refer to the previous section above.

Step 4: Down the page, click on <Custom Level> (see the figure below) to change ActiveX controls and plug-ins settings.

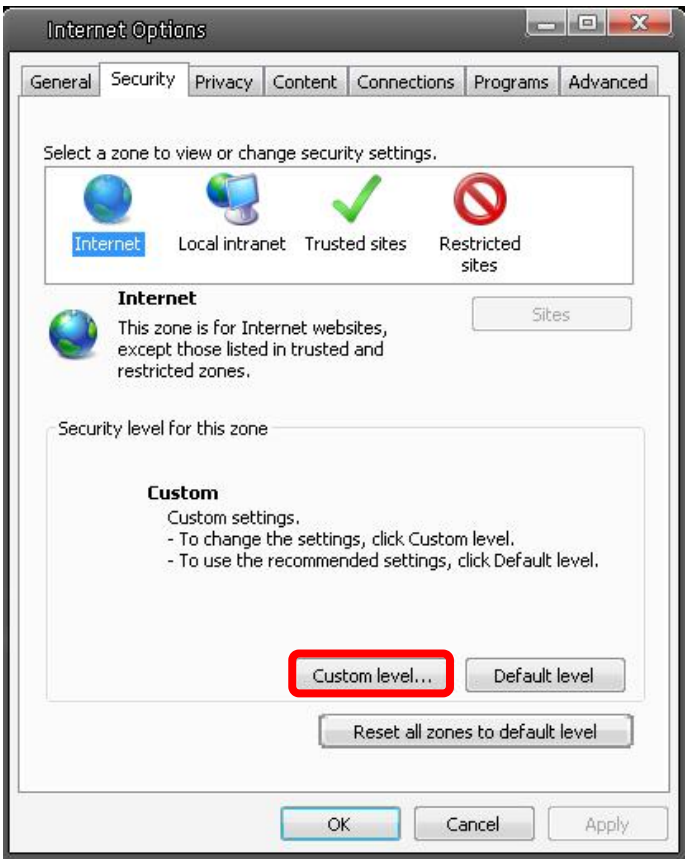

The Security Settings screen is displayed as below:

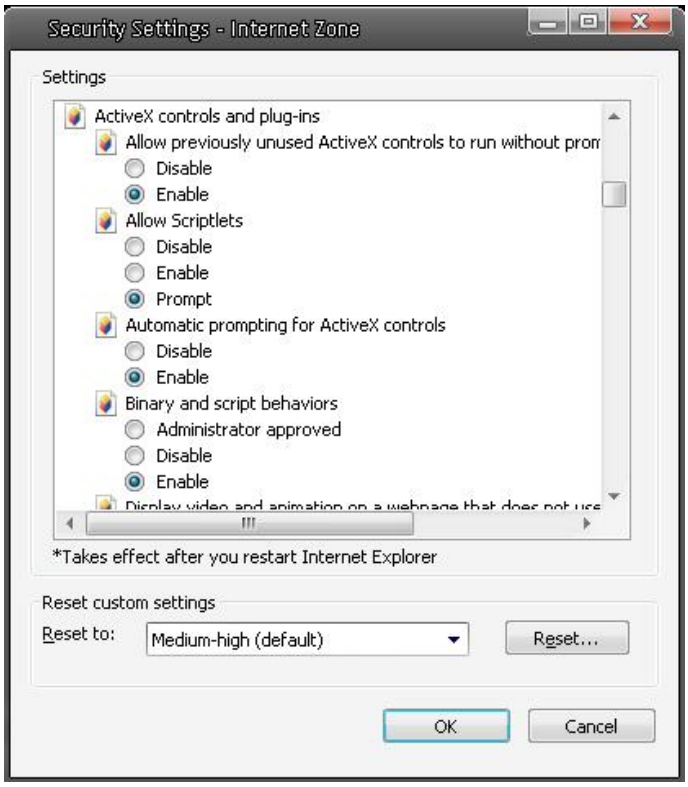

Step 5: Under <ActiveX controls and plug-ins>, set ALL items (as listed below) to <Enable> or <Prompt>. Please note that the items vary by IE version.

ActiveX controls and plug-ins settings:

1. Allow previously unused ActiveX controls to run without prompt.
2. Allow Scriptlets.
3. Automatic prompting for ActiveX controls.
4. Binary and script behaviors.
5. Display video and animation on a webpage that does not use external media player
6. Download signed ActiveX controls
7. Download unsigned ActiveX controls
8. Initialize and script ActiveX controls not marked as safe for scripting
9. Run ActiveX controls and plug-ins

Script ActiveX controls marked safe for scripting

Step 6: Click on <OK> to accept the settings and close the <Security> screen.

Step 7: Click on <OK> to close the Internet Options screen.

Step 8: Close the browser window, and restart a new one later for accessing the IP Camera.

Appendix C: DC Viewer Download Procedure

The procedure of DC Viewer software download is specified as follows.

Step 1: In the DC Viewer installation page, click on <Next> for starting installing.

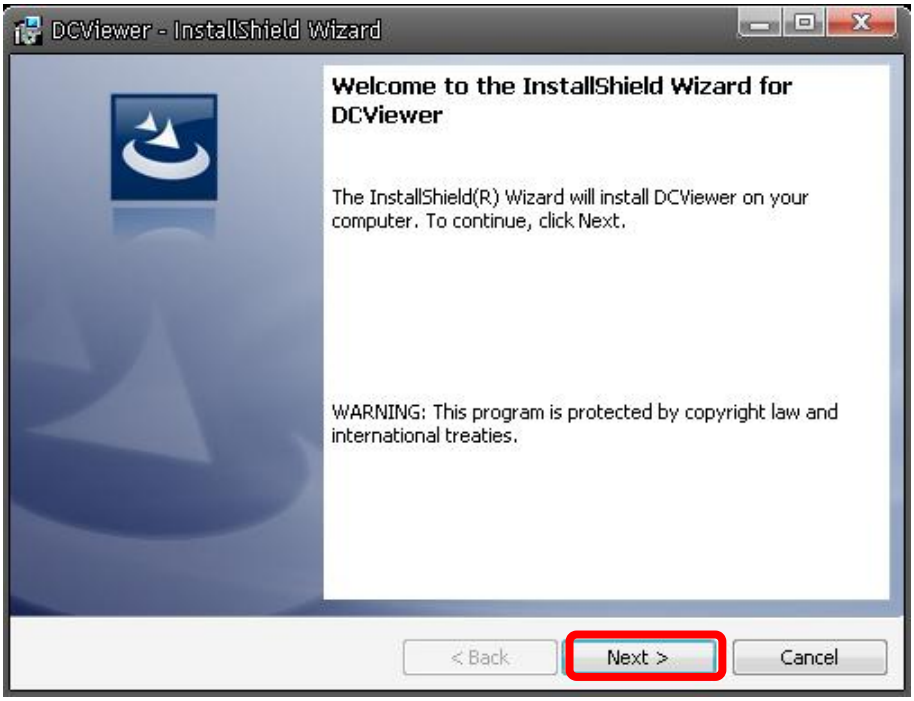
DCViewer - InstallShield Wizard
Welcome to the InstallShield Wizard for DCViewer
The InstallShield(R) Wizard will install DCViewer on your computer. To continue, click Next.
WARNING: This program is protected by copyright law and international treaties.
< Back
Next >
Cancel

Step 2: Setup starts. Please wait for a while until the loading bar runs out.

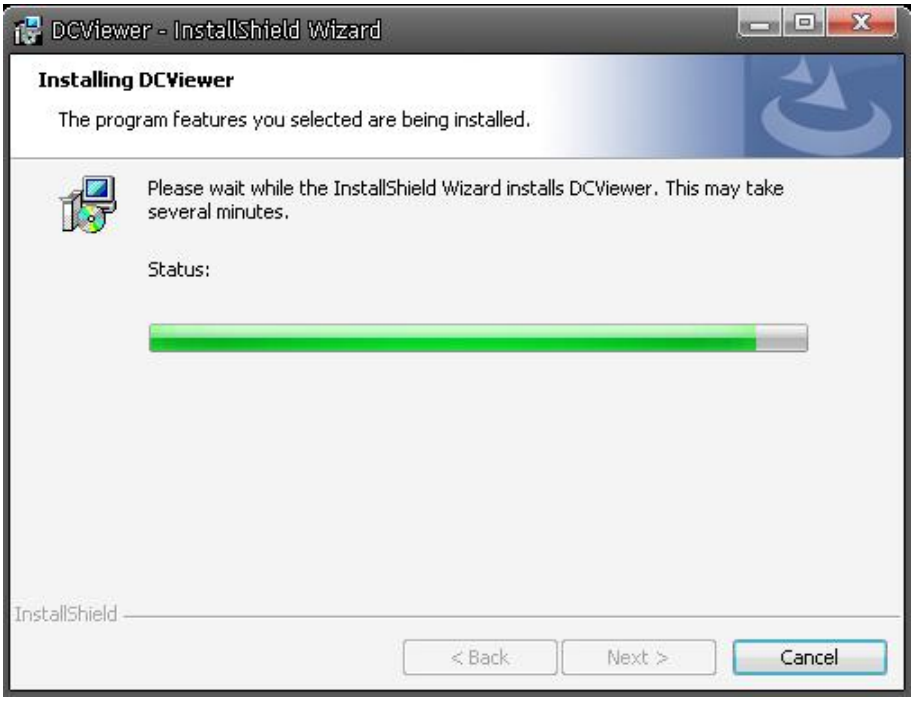
DCViewer - InstallShield Wizard
Installing DCViewer
The program features you selected are being installed.
Please wait while the InstallShield Wizard installs DCViewer. This may take several minutes.
Status:
InstallShield
< Back
Next >
Cancel

Step 3: Click on <Finish> to close the DC Viewer installation page.

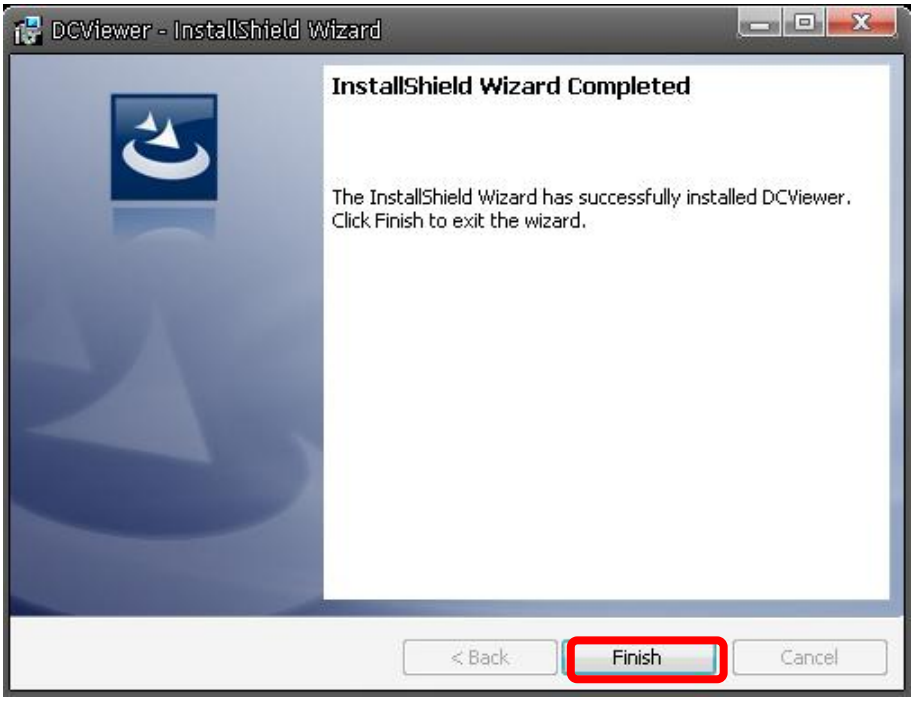
DCViewer - InstallShield Wizard
InstallShield Wizard Completed
The InstallShield Wizard has successfully installed DCViewer. Click Finish to exit the wizard.
< Back
Finish
Cancel

Then, the IP Camera's Home page will display as follows:

Appendix D: Install UPnP Components

Please follow the instructions below to install UPnP components.

Step 1: Go to ”Start”, click on <Control Panel>, and then double click on <Add or Remove Programs>.

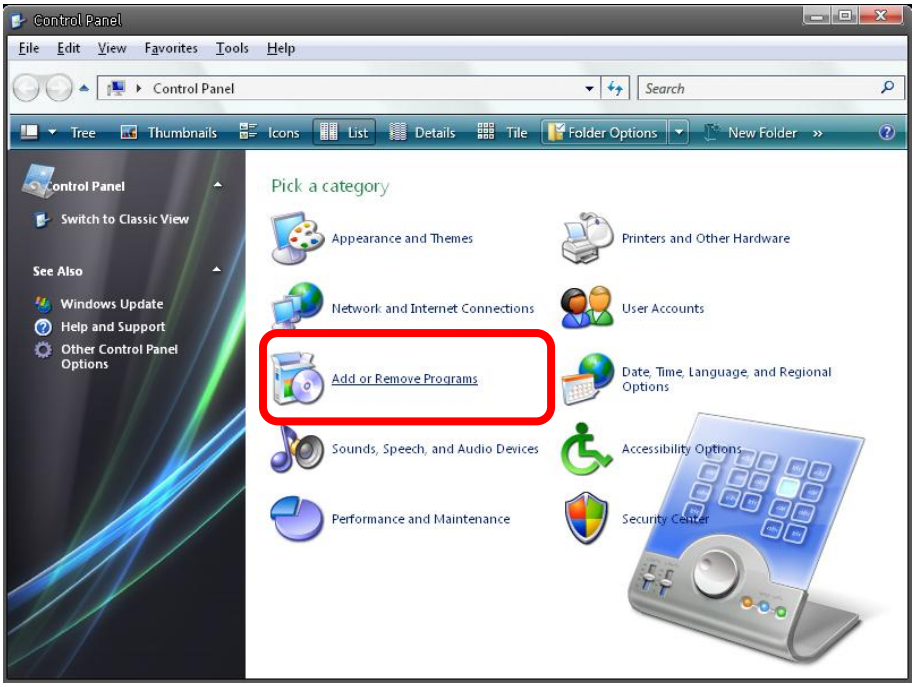

Step 2: Click on <Add/Remove Windows Components> in the Add or Remove Programs page.

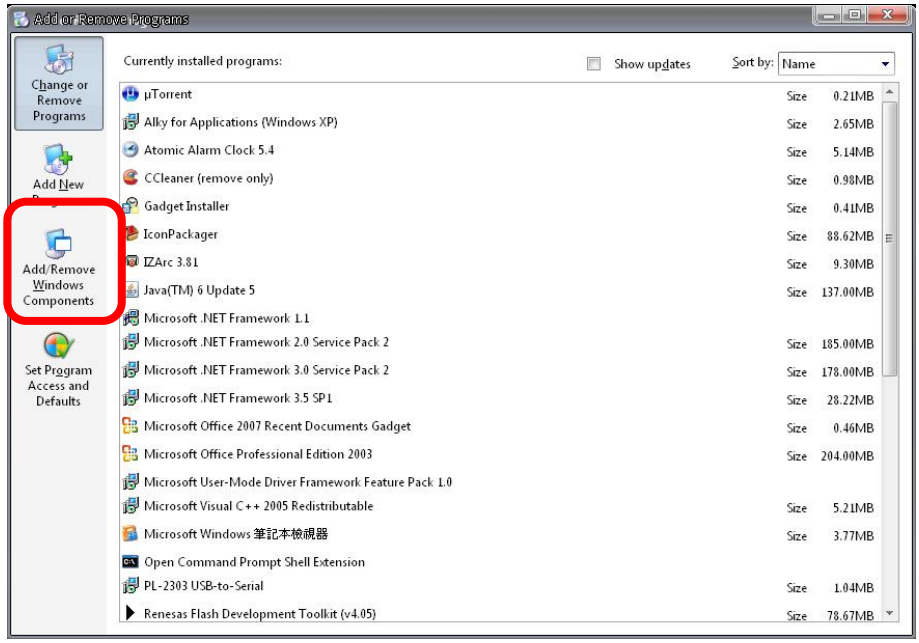
Add or Remove Programs
Change or Remove Programs
Add New
Add/Remove Windows Components
Set Program Access and Defaults
Currently installed programs:
Show updates
Sort by: Name
µTorrent Size 0.21MB
Alky for Applications (Windows XP) Size 2.65MB
Atomic Alarm Clock 5.4 Size 5.14MB
CCleaner (remove only) Size 0.98MB
Gadget Installer Size 0.41MB
IconPackager Size 88.62MB
IZArc 3.81 Size 9.30MB
Java(TM) 6 Update 5 Size 137.00MB
Microsoft .NET Framework 1.1
Microsoft .NET Framework 2.0 Service Pack 2 Size 185.00MB
Microsoft .NET Framework 3.0 Service Pack 2 Size 178.00MB
Microsoft .NET Framework 3.5 SP1 Size 28.22MB
Microsoft Office 2007 Recent Documents Gadget Size 0.46MB
Microsoft Office Professional Edition 2003 Size 204.00MB
Microsoft User-Mode Driver Framework Feature Pack 1.0
Microsoft Visual C++ 2005 Redistributable Size 5.21MB
Microsoft Windows 筆記本檢視器 Size 3.77MB
Open Command Prompt Shell Extension
PL-2303 USB-to-Serial Size 1.04MB
Renesas Flash Development Toolkit (v4.05) Size 78.67MB

Step 3: Select <Networking Services> from the Components list in the Windows Components Wizard window, and then click on <Details>.

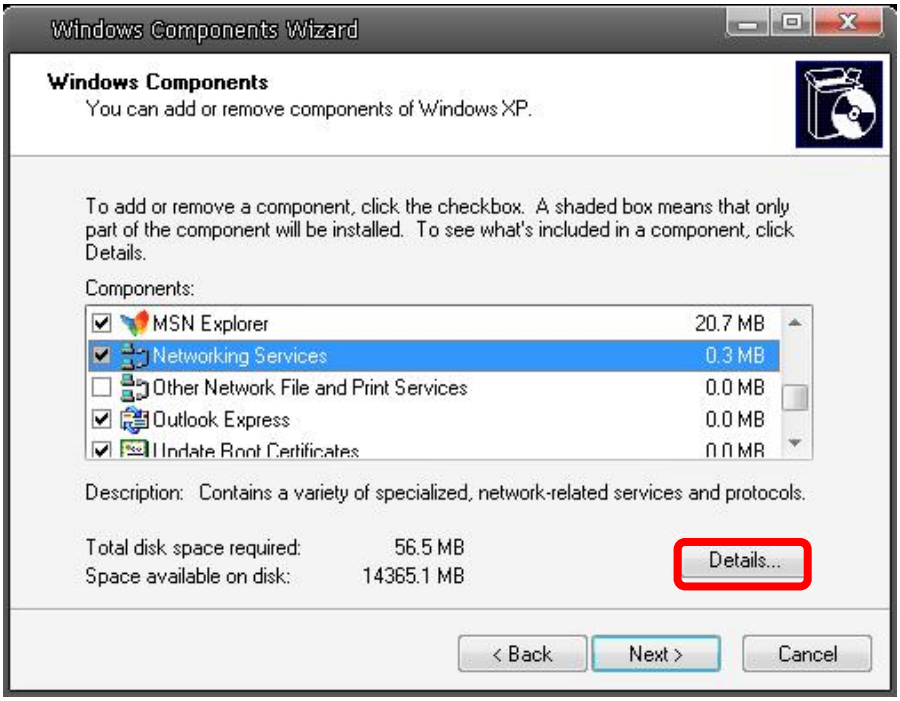
Windows Components Wizard
Windows Components
You can add or remove components of Windows XP.
To add or remove a component, click the checkbox. A shaded box means that only part of the component will be installed. To see what's included in a component, click Details.
Components:
MSN Explorer 20.7 MB
Networking Services 0.3 MB
Other Network File and Print Services 0.0 MB
Outlook Express 0.0 MB
Update Root Certificates 0.0 MB
Description: Contains a variety of specialized, network-related services and protocols.
Total disk space required: 56.5 MB
Space available on disk: 14365.1 MB
Details...
< Back
Next >
Cancel

Step 4: Select <UPnP User Interface> in the Networking Services' subcomponents list and then click on <OK>.

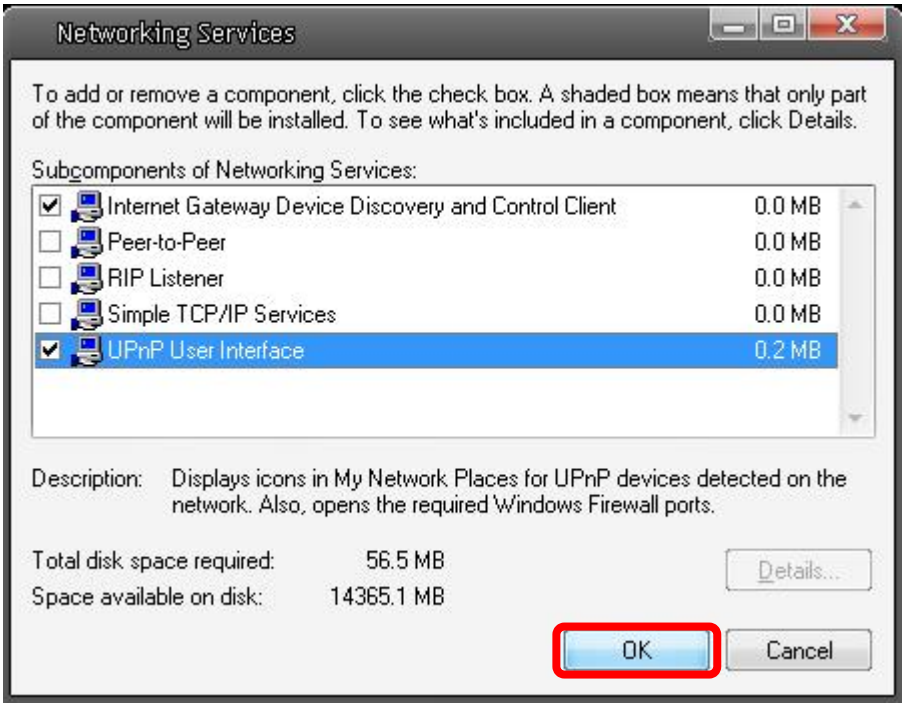
Networking Services
To add or remove a component, click the check box. A shaded box means that only part of the component will be installed. To see what's included in a component, click Details.
Subcomponents of Networking Services:
Internet Gateway Device Discovery and Control Client 0.0 MB
Peer-to-Peer 0.0 MB
RIP Listener 0.0 MB
Simple TCP/IP Services 0.0 MB
UPnP User Interface 0.2 MB
Description: Displays icons in My Network Places for UPnP devices detected on the network. Also, opens the required Windows Firewall ports.
Total disk space required: 56.5 MB
Space available on disk: 14365.1 MB
Details...
OK
Cancel

Step 5: Click on <Next> in the Windows Components Wizard page.

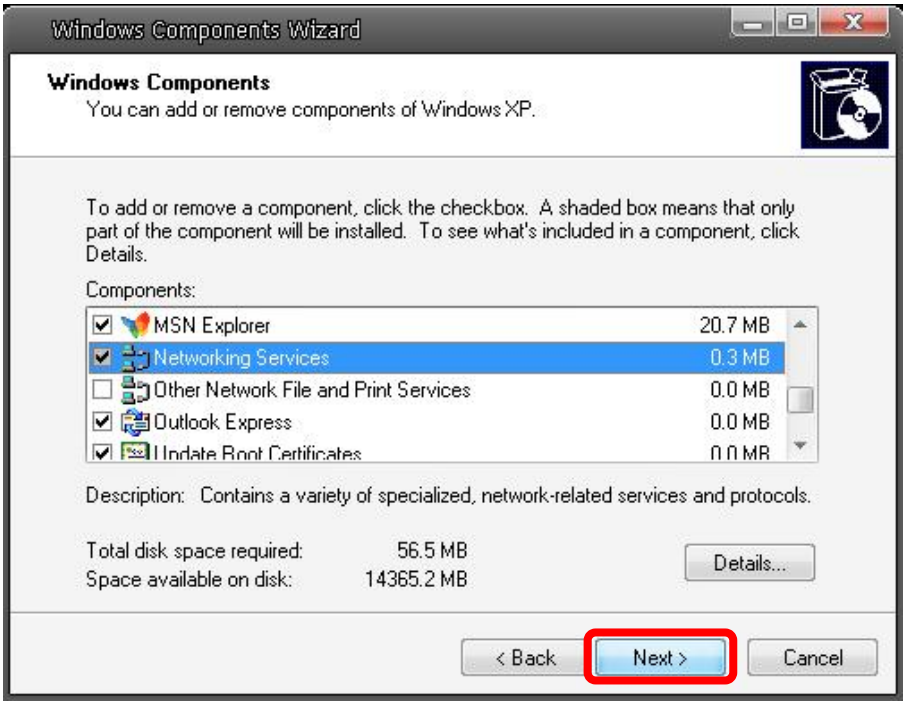
Windows Components Wizard
Windows Components
You can add or remove components of Windows XP.
To add or remove a component, click the checkbox. A shaded box means that only part of the component will be installed. To see what's included in a component, click Details.
Components:
MSN Explorer 20.7 MB
Networking Services 0.3 MB
Other Network File and Print Services 0.0 MB
Outlook Express 0.0 MB
Update Root Certificates 0.0 MB
Description: Contains a variety of specialized, network-related services and protocols.
Total disk space required: 56.5 MB
Space available on disk: 14365.2 MB
Details...
< Back
Next >
Cancel

Step 6: Click on <Finish > to complete installation.

Windows Components Wizard
Completing the Windows Components Wizard
You have successfully completed the Windows Components Wizard.
To close this wizard, click Finish.
< Back
Finish